

Debian #####

Fernández-Sanguino Peña Javier [FAMILY Given] <jfs@debian.org>

Debian

Fernández-Sanguino Peña Javier [FAMILY Given]

##

Debian #####
#####Debian GNU/Linux #####
#####Debian security team #####

Copyright © 2012 The Debian Project

GNU General Public License Notice: This work is free documentation: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 2 of the License, or (at your option) any later version.

This work is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

##

1. ####	1
Authors	1
Where to get the manual (and available formats)	1
#####	2
#####	2
##### (FIXME/TODO)	2
Credits and thanks!	5
2. #####	7
#####?	7
#####	7
Debian #####?	8
3. #####	10
BIOS #####	10
Partitioning the system	10
#####	10
Selecting the appropriate file systems	11
#####	11
root #####	11
#####	12
#####	12
Disabling inetd or its services	13
Install the minimum amount of software required	14
Removing Perl	15
Debian #####	17
4. #####	18
Subscribe to the Debian Security Announce mailing list	18
#####	18
Security update of libraries	19
Security update of the kernel	19
Change the BIOS (again)	21
LILO ### GRUB #####	21
Disable root prompt on the initramfs	22
Remove root prompt on the kernel	22
#####	23
Restricting system reboots through the console	23
Restricting the use of the Magic SysRq key	24
#####	24
Setting /tmp noexec	26
/usr #####	26
Providing secure user access	26
#####: PAM	26
Password security in PAM	27
User access control in PAM	28
User limits in PAM	28
Control of su in PAM	28
Temporary directories in PAM	29
Configuration for undefined PAM applications	29
Limiting resource usage: the limits.conf file	29
User login actions: edit /etc/login.defs	31
User login actions: edit /etc/pam.d/login	32
Restricting ftp: editing /etc/ftputils	32

su ###	33
sudo ###	33
Disallow remote administrative access	33
#####	33
User auditing	33
#####	35
Setting users umasks	35
Limiting what users can see/access	36
Generating user passwords	37
Checking user passwords	38
Logging off idle users	38
tcpwrappers ###	39
#####	39
Using and customizing logcheck	40
#####	41
#####	41
#####	42
#####	42
Protecting against buffer overflows	43
Kernel patch protection for buffer overflows	44
Testing programs for overflows	44
#####	44
#####	45
quota ###	45
The ext2 filesystem specific attributes (chattr/lsattr)	46
#####	47
setuid #####	47
Securing network access	47
#####	48
Configuring syncookies	48
Securing the network on boot-time	49
#####	52
Disabling weak-end hosts issues	52
Protecting against ARP attacks	53
Taking a snapshot of the system	54
#####	55
svgalib #####	55
5. #####	56
ssh ###	56
Chrooting ssh	57
Ssh clients	57
Disallowing file transfers	57
Restricting access to file transfer only	58
Squid #####	58
FTP #####	59
X Window System #####	60
#####	61
##### (lpd # lprng ###)	61
Securing the mail service	62
Configuring a Nullmailer	62
Providing secure access to mailboxes	63
#####	64
BIND #####	64
Bind configuration to avoid misuse	64

Changing BIND's user	66
Chrooting the name server	68
Apache #####	69
Disabling users from publishing web contents	70
#####	70
Published web files	70
finger #####	71
#### chroot ### suid #####	71
Making chrooted environments automatically	71
#####	72
NIS #####	72
Securing RPC services	72
RPC #####	73
Limiting access to RPC services	73
#####	73
#####	73
#####	74
Setting up a firewall	74
6. Debian #####	81
Harden	81
Bastille Linux	82
7. Debian Security Infrastructure	83
The Debian Security Team	83
Debian Security Advisories	83
Vulnerability cross references	84
CVE compatibility	84
Security Tracker	85
Debian Security Build Infrastructure	85
Developer's guide to security updates	86
Debian #####	86
#####	86
Secure apt	87
Per distribution release check	87
Release check of non Debian sources	98
#####	98
8. Debian #####	100
#####	100
#####	100
####	101
#####	101
#####	101
Point to Point tunneling	102
##### (Public Key Infrastructure#PKI)	102
SSL Infrastructure	103
#####	103
GPG agent	104
9. Developer's Best Practices for OS Security	106
Best practices for security review and design	106
Creating users and groups for software daemons	107
10. #####	110
Keep your system secure	110
Tracking security vulnerabilities	110
Continuously update the system	111
Avoid using the unstable branch	113

Security support for the testing branch	113
Automatic updates in a Debian GNU/Linux system	114
Do periodic integrity checks	115
#####	116
#####	116
#####	116
rootkits ####	117
LKM - Loadable Kernel Modules	117
rootkits #####	117
##### — #####	118
honeypot #####	119
11. After the compromise (incident response)	121
#####	121
#####	121
Contact your local CERT	122
####	122
Analysis of malware	123
12. ##### (Frequently asked Questions#FAQ)	124
Debian #####	124
Debian # X #####?	124
My system is vulnerable! (Are you sure?)	133
#####	136
Proftpd #####	136
After installing portsentry, there are a lot of ports open.	136
Debian security team #####	136
A. #####	137
B. Appendix	149
#####	149
#####	151
### IDS #####	153
Setting up a bridge firewall	154
A bridge providing NAT and firewall capabilities	154
#####	155
Basic IPtables rules	156
Sample script to change the default Bind installation.	157
Security update protected by a firewall	160
Chroot environment for SSH	161
Chrooting the ssh users	162
Chrooting the ssh server	165
Chroot environment for Apache	175
See also	179

####

B.1. Iptables ### 156

#1#

```
#####  
#####  
# script kiddie ####  
#### (#####) ##  
  
#####  
#####  
##### (#####) ####  
#####  
  
##### Debian GNU/Linux #####Linux #####  
#####  
##### Debian GNU/Linux #####  
##(#####) #### Debian #####
```

Authors

The current maintainer of this document is Javier Fernández-Sanguino Peña. Please forward him any comments, additions or suggestions, and they will be considered for inclusion in future releases of this manual.

This manual was started as a *HOWTO* by Alexander Reelsen. After it was published on the Internet, Javier Fernández-Sanguino Peña incorporated it into the Debian Documentation Project [<http://www.debian.org/doc>]. A number of people have contributed to this manual (all contributions are listed in the changelog) but the following deserve special mention since they have provided significant contributions (full sections, chapters or appendices):

- Stefano Canepa
- Era Eriksson
- Carlo Perassi
- Alexandre Ratti
- Jaime Robles
- Yotam Rubin
- Frederic Schutz
- Pedro Zorzenon Neto
- Oohara Yuuma
- Davor Ocelic

Where to get the manual (and available formats)

You can download or view the latest version of the Securing Debian Manual from the Debian Documentation Project [<https://www.debian.org/doc/user-manuals#securing>]. If you are reading a copy

from another site, please check the primary copy in case it provides new information. If you are reading a translation, please review the version the translation refers to to the latest version available. If you find that the version is behind please consider using the original copy or review the to see what has changed.

If you want a full copy of the manual you can either download the text version [https://www.debian.org/doc/manuals/securing-debian-manual/securing-debian-manual.en.txt] or the PDF version [https://www.debian.org/doc/manuals/securing-debian-manual/securing-debian-manual.en.pdf] from the Debian Documentation Project's site. These versions might be more useful if you intend to copy the document over to a portable device for offline reading or you want to print it out. Be forewarned, the manual is over two hundred pages long and some of the code fragments, due to the formatting tools used, are not wrapped in the PDF version and might be printed incomplete.

The document is also provided in text, html and PDF formats in the harden-doc [http://packages.debian.org/harden-doc] package. Notice, however, that the package maybe not be completely up to date with the document provided on the Debian site (but you can always use the source package to build an updated version yourself).

This document is part of the documents distributed by the Debian Documentation Project [https://www.debian.org/doc/ddp]. You can review the changes introduced in the document using a web browser and obtaining information from the version control logs online [https://salsa.debian.org/ddp-team/securing-debian-manual]. You can also checkout the code using Git with the following call in the command line:

```
$ git clone https://salsa.debian.org/ddp-team/securing-debian-manual.git
```

#####

```
##### (Alexander Reelsen) #####
#####
#####

##### FIXME # #####
#####

#####
```

#####

```
Debian GNU/Linux #####Linux ##### Unix ####
##### (#
#####) #####
## #####
```

(FIXME/TODO)

This section describes all the things that need to be fixed in this manual. Some paragraphs include *FIXME* or *TODO* tags describing what content is missing (or what kind of work needs to be done). The purpose of this section is to describe all the things that could be included in the future in the manual, or enhancements that need to be done (or would be interesting to add).

If you feel you can provide help in contributing content fixing any element of this list (or the inline annotations), contact the main author (#Authors#).

-
- This document has yet to be updated based on the latest Debian releases. The default configuration of some packages need to be adapted as they have been modified since this document was written.
 - Expand the incident response information, maybe add some ideas derived from Red Hat's Security Guide's chapter on incident response [<https://web.archive.org/web/20100412191348/http://www.redhat.com/docs/manuals/linux/RHL-9-Manual/security-guide/ch-response.html>].
 - Write about remote monitoring tools (to check for system availability) such as monit, daemontools and mon. See Sysamin Guide [<https://web.archive.org/web/20100110040204/http://linuxdevcenter.com/pub/a/linux/2002/05/09/sysadminguide.html>].
 - Consider writing a section on how to build Debian-based network appliances (with information such as the base system, equivs and FAI).
 - Check if this site [https://web.archive.org/web/20040731082209/http://www.giac.org/practical/gsec/Chris_Koutras_GSEC.pdf] has relevant info not yet covered here.
 - Add information on how to set up a laptop with Debian, look here [https://web.archive.org/web/20040725013857/http://www.giac.org/practical/gcux/Stephanie_Thomas_GCUX.pdf].
 - Debian GNU/Linux ##### (#####...)
 - Add information on setting up a proxy firewall with Debian GNU/Linux stating specifically which packages provide proxy services (like xfwf, ftp-proxy, redir, smtpd, dnrd, jftpgw, oops, pdnsd, perdition, transproxy, tsocks). Should point to the manual for any other info. Note that zorp is now available as a Debian package and *is* a proxy firewall (they also provide Debian packages upstream).
 - file-rc #####
 - ##### URL #####
 - ##### (Debian #) #####:
 - ##### lpr ##### cups (#####)?
 - ##### lrp ##### lpr
 - bind ##### dnrd/maradns
 - apache ##### dhttpd/thttpd/wn (tux?)
 - exim/sendmail ##### ssmtpd/smtpd/postfix
 - squid ##### tinyproxy
 - ftpd ##### oftpd/vsftp
 - ...
 - Debian ##### Debian ##### ##
 - Linux Intrusion Detection (kernel-patch-2.4-lids)
 - Linux Trustees (trustees#####)
 - NSA Enhanced Linux [<http://wiki.debian.org/SELinux>]

-
- linux-patch-openswan
 - ...
 - ##### (inetd ####)# #####
 - #####
 - #####
 - tcpwrappers ##### wrapper ##?
 - hosts.equiv #####
 - Issues with file sharing servers such as Samba and NFS?
 - suidmanager/dpkg-statoverrides#
 - lpr # lprng#
 - gnome # IP #####
 - Talk about pam_chroot (see <http://lists.debian.org/debian-security/2002/05/msg00011.html>) and its usefulness to limit users. Introduce information related to <https://web.archive.org/web/20031204060940/http://www.securityfocus.com/infocus/1575>. pdmenu, for example is available in Debian (whereas flash is not).
 - Talk about chrooting services, some more info on this Linux Focus article [<http://www.linuxfocus.org/English/January2002/article225.shtml>].
 - Talk about programs to make chroot jails. compartment and chrootuid are waiting in incoming. Some others (makejail, jailer) could also be introduced.
 - More information regarding log analysis software (i.e. logcheck and logcolorise).
 - 'advanced' routing (traffic policing is security related).
 - limiting **ssh** access to running certain commands.
 - using dpkg-statoverride.
 - secure ways to share a CD burner among users.
 - secure ways of providing networked sound in addition to network display capabilities (so that X clients' sounds are played on the X server's sound hardware).
 - securing web browsers.
 - setting up ftp over **ssh**.
 - using crypto loopback file systems.
 - encrypting the entire file system.
 - steganographic tools.
 - setting up a PKA for an organization.

- using LDAP to manage users. There is a HOWTO of ldap+kerberos for Debian at <http://www.bayour.com> written by Turbo Fredrikson.
- How to remove information of reduced utility in production systems such as `/usr/share/doc`, `/usr/share/man` (yes, security by obscurity).
- More information on lcap based on the packages README file (well, not there yet, see <http://bugs.debian.org/cgi-bin/bugreport.cgi?bug=169465>) and from the article from LWN: <http://lwn.net/1999/1202/kernel.php3>.
- Add Colin's article on how to setup a chroot environment for a full sid system (<https://web.archive.org/web/20030204012846/https://people.debian.org/~walters/chroot.html>).
- Add information on running multiple **snort** sensors in a given system (check bug reports sent to snort).
- Add information on setting up a honeypot (honeyd).
- Describe situation wrt to FreeSwan (orphaned) and OpenSwan. VPN section needs to be rewritten.
- Add a specific section about databases, current installation defaults and how to secure access.
- Add a section about the usefulness of virtual servers (Xen et al).
- Explain how to use some integrity checkers (AIDE, integrit or samhain). The basics are simple and could even explain some configuration improvements.

Credits and thanks!

- Alexander Reelsen #####
- added more info to the original doc.
- Robert van der Meulen # quota #####
- Ethan Benson # PAM #####
- Dariusz Puchalak #####
- Gaby Schilders ##### (#####)#####
- Era Eriksson #####
- Philipe Gaspar # LKM #####
- Yotam Rubin #####bind ##### md5 #####
- Francois Bayart provided the appendix describing how to set up a bridge firewall.
- Joey Hess wrote the section describing how Secure Apt works on the Debian Wiki [<http://wiki.debian.org/SecureApt>].
- Martin F. Krafft wrote some information on his blog regarding fingerprint verification which was also reused for the Secure Apt section.
- Francesco Poli did an extensive review of the manual and provided quite a lot of bug reports and typo fixes which improved and helped update the document.

- All the people who made suggestions for improvements that (eventually) were included here (see #Where to get the manual (and available formats)#).
- # (Alexander) ### HOWTO (#####) # #####
- Debian #####

#2#

#####?

Debian #####
#####

Debian #####
#####:

- #####
##tcpwrapper #####
- Limit users and permissions in your system.
- #####
- #####

#####

(###) ##### UNIX ### Linux (###) # ###

Debian GNU/Linux # Linux ##### Linux ##### UNIX ##
Debian GNU/Linux ##### (#####)

#####:

- The <http://www.tldp.org/HOWTO/Security-HOWTO/> is one of the best references regarding general Linux security.
- The <http://www.tldp.org/HOWTO/Security-Quickstart-HOWTO/> is also a very good starting point for novice users (both to Linux and security).
- The <http://seifried.org/lasg/> is a complete guide that touches all the issues related to security in Linux, from kernel security to VPNs. Note that it has not been updated since 2001, but some information is still relevant.¹
- Kurt Seifried's <http://seifried.org/security/os/linux/20020324-securing-linux-step-by-step.html>.
- http://www.linuxdoc.org/links/p_books.html#securing_linux #### RedHat #####
Debian
- Another Red Hat related document is <https://web.archive.org/web/20050520170309/https://ltp.sourceforge.net/docs/RHEL-EAL3-Configuration-Guide.pdf>.
- IntersectAlliance has published some documents that can be used as reference cards on how to harden Linux servers (and their services), the documents are available at <https://web.archive.org/web/20030210231943/http://www.intersectalliance.com/projects/index.html>.

¹ At a given time it was superseded by the "Linux Security Knowledge Base". This documentation is also provided in Debian through the `lskb` package. Now it's back as the `Lasg` again.

- For network administrators, a good reference for building a secure network is the <https://web.archive.org/web/20030418093551/http://www.linuxsecurity.com/docs/LDP/Securing-Domain-HOWTO/>.
- If you want to evaluate the programs you are going to use (or want to build up some new ones) you should read the <http://www.tldp.org/HOWTO/Secure-Programs-HOWTO/> (master copy is available at <http://www.dwheeler.com/secure-programs/>, it includes slides and talks from the author, David Wheeler)
- If you are considering installing firewall capabilities, you should read the <http://www.tldp.org/HOWTO/Firewall-HOWTO.html> and the <http://www.tldp.org/HOWTO/IPCHAINS-HOWTO.html> (for kernels previous to 2.4).
- Finally, a good card to keep handy is the <https://web.archive.org/web/20030308013020/http://www.linuxsecurity.com/docs/QuickRefCard.pdf>.

(NFS, NIS, SMB...) ##### <http://www.linuxdoc.org/> # HOWTO #####
#####

Debian GNU/Linux ## Linux Documentation Project # HOWTO ### doc-linux-text (#####) ### doc-linux-html (html #) ##### /usr/share/doc/HOWTO/en-txt ### /usr/share/doc/HOWTO/en-html #####

Linux ##:

- Maximum Linux Security : A Hacker's Guide to Protecting Your Linux Server and Network. Anonymous. Paperback - 829 pages. Sams Publishing. ISBN: 0672313413. July 1999.
- Linux Security By John S. Flowers. New Riders; ISBN: 0735700354 March 1999
- https://web.archive.org/web/20030202131658/https://www.linux.org/books/ISBN_0072127732.html By Brian Hatch. McGraw-Hill Higher Education. ISBN 0072127732. April, 2001

(UNIX #####Linux #####):

- <https://web.archive.org/web/20030206231652/http://www.oreilly.com/catalog/puis/> Garfinkel, Simpson, and Spafford, Gene; O'Reilly Associates; ISBN 0-56592-148-8; 1004pp; 1996.
- Firewalls and Internet Security Cheswick, William R. and Bellovin, Steven M.; Addison-Wesley; 1994; ISBN 0-201-63357-4; 320pp.

#####:

- <http://csrc.nist.gov/>.
- <https://cve.mitre.org/data/refs/refmap/source-BUGTRAQ.html> CVE Reference Map for Source BUGTRAQ
- <http://www.linuxsecurity.com/>. General information regarding Linux security (tools, news...). Most useful is the <https://linuxsecurity.com/howtos> page.

Debian #####?

Debian GNU/Linux ##### Debian #####

- Debian problems are always handled openly, even security related. Security issues are discussed openly on the debian-security mailing list. Debian Security Advisories (DSAs) are sent to public mailing lists

(both internal and external) and are published on the public server. As the http://www.debian.org/social_contract states: *We will not hide problems. We will keep our entire bug report database open for public view at all times. Reports that people file online will promptly become visible to others.*

- Debian ##### Debian ##### security team # #####
<http://www.securityfocus.com/cgi-bin/vulns.pl>
- ##### Debian #####
stable ### unstable
- ##### <http://security.debian.org/> #####
- Debian #####
- Debian #####
#####: #####
#####
- Package maintainers are aware of security issues. This leads to many "secure by default" service installations which could impose certain restrictions on their normal use. Debian does, however, try to balance security and ease of administration - the programs are not de-activated when you install them (as it is the case with say, the BSD family of operating systems). In any case, prominent security issues (such as `setuid` programs) are part of the <http://www.debian.org/doc/debian-policy/>.

By publishing security information specific to Debian and complementing other information-security documents related to Debian (see #####), this document aims to produce better system installations security-wise.

#3#

BIOS

```
##### BIOS ##### cdrom ### #####  
#####  
### #####
```

```
#####  
#####
```

Note: many BIOSes have well known default master passwords, and applications also exist to retrieve the passwords from the BIOS. Corollary: don't depend on this measure to secure console access to system.

Partitioning the system

#####

```
#####:
```

- Any directory tree which a user has write permissions to, such as e.g. /home, /tmp and /var/tmp/, should be on a separate partition. This reduces the risk of a user DoS by filling up your "/" mount point and rendering the system unusable (Note: this is not strictly true, since there is always some space reserved for root which a normal user cannot fill), and it also prevents hardlink attacks.¹
- /var (### /var/log) ##### Debian ##### /var ##### #####
(apt # #####) # /var/apt/cache/archives
- #####File Hierarchy Standard ###
/opt ### /usr/local ##### Debian ##### (#####) #####
#####
- #####
#####

In the case of a mail server it is important to have a separate partition for the mail spool. Remote users (either knowingly or unknowingly) can fill the mail spool (/var/mail and/or /var/spool/mail). If the spool is on a separate partition, this situation will not render the system unusable. Otherwise (if the spool directory is on the same partition as /var) the system might have important problems: log entries will not be created, packages cannot be installed, and some programs might even have problems starting up (if they use /var/run).

Also, for partitions in which you cannot be sure of the needed space, installing Logical Volume Manager (lvm-common and the needed binaries for your kernel, this might be either lvm10, lvm6, or lvm5). Using lvm, you can create volume groups that expand multiple physical volumes.

¹ A very good example of this kind of attacks using /tmp is detailed in <http://www.hackinglinuxexposed.com/articles/20031111.html> and <http://www.hackinglinuxexposed.com/articles/20031214.html> (notice that the incident is Debian-related). It is basically an attack in which a local user *stashes* away a vulnerable setuid application by making a hard link to it, effectively avoiding any updates (or removal) of the binary itself made by the system administrator. Dpkg was recently fixed to prevent this (see <http://bugs.debian.org/225692>) but other setuid binaries (not controlled by the package manager) are at risk if partitions are not setup correctly.

Selecting the appropriate file systems

During the system partitioning you also have to decide which file system you want to use. The default file system² selected in the Debian installation for Linux partitions is `ext3`, a journaling file system. It is recommended that you always use a journaling file system, such as `ext3`, `reiserfs`, `jfs` or `xfs`, to minimize the problems derived from a system crash in the following cases:

- for laptops in all the file systems installed. That way if you run out of battery unexpectedly or the system freezes due to a hardware issue (such as X configuration which is somewhat common) you will be less likely to lose data during a hardware reboot.
- for production systems which store large amounts of data (like mail servers, ftp servers, network file systems...) it is recommended on these partitions. That way, in the event of a system crash, the server will take less time to recover and check the file systems, and data loss will be less likely.

Leaving aside the performance issues regarding journaling file systems (since this can sometimes turn into a religious war), it is usually better to use the `ext3` file system. The reason for this is that it is backwards compatible with `ext2`, so if there are any issues with the journaling you can disable it and still have a working file system. Also, if you need to recover the system with a bootdisk (or CD-ROM) you do not need a custom kernel. If the kernel is 2.4 or 2.6 `ext3` support is already available, if it is a 2.2 kernel you will be able to boot the file system even if you lose journaling capabilities. If you are using other journaling file systems you will find that you might not be able to recover unless you have a 2.4 or 2.6 kernel with the needed modules built-in. If you are stuck with a 2.2 kernel on the rescue disk, it might be even more difficult to have it access `reiserfs` or `xfs`.

In any case, data integrity might be better under `ext3` since it does file-data journaling while others do only meta-data journaling, see <http://lwn.net/2001/0802/a/ext3-modes.php3>.

Notice, however, that there are some partitions that might not benefit from using a journaling filesystem. For example, if you are using a separate partition for `/tmp/` you might be better off using a standard `ext2` filesystem as it will be cleaned up when the system boots.

#####

```
#####
#####
#####
```

```
##### (CD-ROM ###
#) #####!
```

```
Debian #####
##### (##### NAT #####)#####Debian #####
##### (## Debian #####) apt-move #
apt-proxy ### Debian #####
```

root

Setting a good root password is the most basic requirement for having a secure system. See `passwd(1)` for some hints on how to create good passwords. You can also use an automatic password generation program to do this for you (see `#Generating user passwords#`).

² Since Debian GNU/Linux 4.0, codename `etch`

Plenty of information on choosing good passwords can be found on the Internet; two that provide a decent summary and rationale are Eric Wolfram's <http://wolfram.org/writing/howto/password.html> and Walter Belgers' <https://web.archive.org/web/20030218000949/http://www.belgers.com/write/pwseceng.txt>

#####

```
##### ftp #### web #####
#####
#####
#####
```

As you may already know, when you install a given service the default behavior is to activate it. In a default Debian installation, with no services installed, the number of running services is quite low and the number of network-oriented services is even lower. In a default Debian 3.1 standard installation you will end up with OpenSSH, Exim (depending on how you configured it) and the RPC portmapper available as network services³. If you did not go through a standard installation but selected an expert installation you can end up with no active network services. The RPC portmapper is installed by default because it is needed for many services, for example NFS, to run on a given system. However, it can be easily removed, see #Securing RPC services# for more information on how to secure or disable RPC services.

```
##### (####) # Debian GNU/Linux ##### #2 #####inetd #####
### ##### (###/etc/inetd.conf #####)#####
##### /etc/init.d ##### SysV ## (#####) ###
# /etc/rc?.d/* ## ##### (##### /usr/share/doc/
sysvinit/README.runlevels.gz #####)#
```

If you want to keep some services but use them rarely, use the **update-*** commands, e.g. **update-inetd** and **update-rc.d** to remove them from the startup process. For more information on how to disable network services read #####. If you want to change the default behaviour of starting up services on installation of their associated packages⁴ use **policy-rc.d**, please read /usr/share/doc/sysv-rc/README.policy-rc.d.gz for more information.

invoke-rc.d support is mandatory in Debian, which means that for Debian 4.0 *etch* and later releases you can write a policy-rc.d file that forbids starting new daemons before you configure them. Although no such scripts are packaged yet, they are quite simple to write. See policyrcd-script-zg2.

#####

Disabling a daemon service is quite simple. You either remove the package providing the program for that service or you remove or rename the startup links under /etc/rc\${runlevel}.d/. If you rename them make sure they do not begin with 'S' so that they don't get started by /etc/init.d/rc. Do not remove all the available links or the package management system will regenerate them on package upgrades, make sure you leave at least one link (typically a 'K', i.e. kill, link). For more information read <http://www.debian.org/doc/manuals/reference/ch-system.en.html#s-custombootscripts> section of the Debian Reference (Chapter 2 - Debian fundamentals).

You can remove these links manually or using `update-rc.d` (see `update-rc.d(8)`). For example, you can disable a service from executing in the multi-user runlevels by doing:

³ The footprint in Debian 3.0 and earlier releases wasn't as tight, since some **inetd** services were enabled by default. Also standard installations of Debian 2.2 installed the NFS server as well as the telnet server.

⁴ This is desirable if you are setting up a development chroot, for example.

```
# update-rc.d name stop XX 2 3 4 5 .
```

```
file-rc ##### update-rc.d -f _service_ remove #####  
#####  
##### (#####)  
##### (http://bugs.debian.org/67095 #####)# #####:
```

```
#### /etc/rcrunlevel.d/[SK]??name #####  
update-rc.d #####  
#####  
#####
```

```
file-rc #####
```

You can use the TUI (Text User Interface) provided by `sysv-rc-conf` to do all these changes easily (**sysv-rc-conf** works both for file-rc and normal System V runlevels). You will also find similar GUIs for desktop systems. You can also use the command line interface of `sysv-rc-conf`:

```
# sysv-rc-conf foobar off
```

The advantage of using this utility is that the rc.d links are returned to the status they had before the 'off' call if you re-enable the service with:

```
# sysv-rc-conf foobar on
```

Other (less recommended) methods of disabling services are:

- Removing the `/etc/init.d/service_name` script and removing the startup links using:

```
# update-rc.d name remove
```

- Move the script file (`/etc/init.d/service_name`) to another name (for example `/etc/init.d/OFF.service_name`). This will leave dangling symlinks under `/etc/rc${runlevel}.d/` and will generate error messages when booting up the system.
- Remove the execute permission from the `/etc/init.d/service_name` file. That will also generate error messages when booting.
- Edit the `/etc/init.d/service_name` script to have it stop immediately once it is executed (by adding an **exit 0** line at the beginning or commenting out the `start-stop-daemon` part in it). If you do this, you will not be able to use the script to startup the service manually later on.

Nevertheless, the files under `/etc/init.d` are configuration files and should not get overwritten due to package upgrades if you have made local changes to them.

```
##### (UNIX) #####Debian # ##### /etc/default/_servicename_ #####  
#####
```

```
FIXME: file-rc #####
```

Disabling inetd or its services

You should check if you really need the **inetd** daemon nowadays. Inetd was always a way to compensate for kernel deficiencies, but those have been taken care of in modern Linux kernels. Denial of Service

possibilities exist against **inetd** (which can increase the machine's load tremendously), and many people always preferred using stand-alone daemons instead of calling services via **inetd**. If you still want to run some kind of **inetd** service, then at least switch to a more configurable Inet daemon like **xinetd**, **rlnetd** or **openbsd-inetd**.

You should stop all unneeded Inetd services on your system, like **echo**, **chargen**, **discard**, **daytime**, **time**, **talk**, **ntalk** and r-services (**rsh**, **rlogin** and **rcp**) which are considered HIGHLY insecure (use **ssh** instead).

```
/etc/inetd.conf ##### Debian #####:
update-inetd ## (#####)##### telnet
#####inet #####(#####telnet#####)
```

```
/usr/sbin/update-inetd --disable telnet
```

```
##### IP ##### inetd ####
#####xinetd ##### inetd #####
```

Install the minimum amount of software required

Debian comes with *a lot* of software, for example the Debian 3.0 *woody* release includes 6 or 7 (depending on architecture) CD-ROMs of software and thousands of packages, and the Debian 3.1 *sarge* release ships with around 13 CD-ROMs of software. With so much software, and even if the base system installation is quite reduced⁵ you might get carried away and install more than is really needed for your system.

Since you already know what the system is for (don't you?) you should only install software that is really needed for it to work. Any unnecessary tool that is installed might be used by a user that wants to compromise the system or by an external intruder that has gotten shell access (or remote code execution through an exploitable service).

The presence, for example, of development utilities (a C compiler) or interpreted languages (such as **perl** - but see below -, **python**, **tcl**...) may help an attacker compromise the system even further:

- allowing him to do privilege escalation. It's easier, for example, to run local exploits in the system if there is a debugger and compiler ready to compile and test them!
- providing tools that could help the attacker to use the compromised system as a *base of attack* against other systems.⁶

Of course, an intruder with local shell access can download his own set of tools and execute them, and even the shell itself can be used to make complex programs. Removing unnecessary software will not help *prevent* the problem but will make it slightly more difficult for an attacker to proceed (and some might give up in this situation looking for easier targets). So, if you leave tools in a production system that could

⁵ For example, in Debian woody it is around 400-500 Mbs, try this:

```
$ size=0
$ for i in `grep -A 1 -B 1 "^Section: base" /var/lib/dpkg/available |
grep -A 2 "^Priority: required" |grep "^Installed-Size" |cut -d : -f 2
`; do size=$((size+$i)); done
$ echo $size
47762
```

⁶ Many intrusions are made just to get access to resources to do illegitimate activity (denial of service attacks, spam, rogue ftp servers, dns pollution...) rather than to obtain confidential data from the compromised system.

be used to remotely attack systems (see #####) you can expect an intruder to use them too if available.

Please notice that a default installation of Debian *sarge* (i.e. an installation where no individual packages are selected) will install a number of development packages that are not usually needed. This is because some development packages are of *Standard* priority. If you are not going to do any development you can safely remove the following packages from your system, which will also help free up some space:

Package	Size
-----+-----	
gdb	2,766,822
gcc-3.3	1,570,284
dpkg-dev	166,800
libc6-dev	2,531,564
cpp-3.3	1,391,346
manpages-dev	1,081,408
flex	257,678
g++	1,384 (Note: virtual package)
linux-kernel-headers	1,377,022
bin86	82,090
cpp	29,446
gcc	4,896 (Note: virtual package)
g++-3.3	1,778,880
bison	702,830
make	366,138
libstdc++5-3.3-dev	774,982

This is something that is fixed in releases post-sarge, see <http://bugs.debian.org/cgi-bin/bugreport.cgi?bug=301273> and <http://bugs.debian.org/cgi-bin/bugreport.cgi?bug=301138>. Due to a bug in the installation system this did not happen when installing with the installation system of the Debian 3.0 *woody* release.

Removing Perl

You must take into account that removing **perl** might not be too easy (as a matter of fact it can be quite difficult) in a Debian system since it is used by many system utilities. Also, the perl-base is *Priority: required* (that about says it all). It's still doable, but you will not be able to run any **perl** application in the system; you will also have to fool the package management system to think that the perl-base is installed even if it's not.⁷

Which utilities use **perl**? You can see for yourself:

```
$ for i in /bin/* /sbin/* /usr/bin/* /usr/sbin/*; do [ -f $i ] && {
type=`file $i | grep -il perl`; [ -n "$type" ] && echo $i; }; done
```

These include the following utilities in packages with priority *required* or *important*:

- /usr/bin/chkdupexe of package util-linux.
- /usr/bin/replay of package bsduutils.
- /usr/sbin/cleanup-info of package dpkg.

⁷ You can make (on another system) a dummy package with equivs.

- /usr/sbin/dpkg-divert of package dpkg.
- /usr/sbin/dpkg-statoverride of package dpkg.
- /usr/sbin/install-info of package dpkg.
- /usr/sbin/update-alternatives of package dpkg.
- /usr/sbin/update-rc.d of package sysvinit.
- /usr/bin/grog of package groff-base.
- /usr/sbin/adduser of package adduser.
- /usr/sbin/debconf-show of package debconf.
- /usr/sbin/deluser of package adduser.
- /usr/sbin/dpkg-preconfigure of package debconf.
- /usr/sbin/dpkg-reconfigure of package debconf.
- /usr/sbin/exigrep of package exim.
- /usr/sbin/eximconfig of package exim.
- /usr/sbin/eximstats of package exim.
- /usr/sbin/exim-upgrade-to-r3 of package exim.
- /usr/sbin/exiqsumm of package exim.
- /usr/sbin/keytab-lilo of package lilo.
- /usr/sbin/liloconfig of package lilo.
- /usr/sbin/lilo_find_mbr of package lilo.
- /usr/sbin/syslogd-listfiles of package sysklogd.
- /usr/sbin/syslog-facility of package sysklogd.
- /usr/sbin/update-inetd of package netbase.

So, without Perl and, unless you remake these utilities in shell script, you will probably not be able to manage any packages (so you will not be able to upgrade the system, which is *not a Good Thing*).

If you are determined to remove Perl from the Debian base system, and you have spare time, submit bug reports to the previous packages including (as a patch) replacements for the utilities above written in shell script.

If you wish to check out which Debian packages depend on Perl you can use

```
$ grep-available -s Package,Priority -F Depends perl
```

or

#####

\$ apt-cache rdepends perl

Debian

Debian security team #### ##### debian-security-announce #####Debian
debian-security@lists.debian.org #

#####subject ## #subscribe##### mailto:debian-security-
announce-request@lists.debian.org # ##### http://www.debian.org/
MailingLists/subscribe #####

Debian #####
#####(#####
#####)

#4#

Once the system is installed you can still do more to secure the system; some of the steps described in this chapter can be taken. Of course this really depends on your setup but for physical access prevention you should read #Change the BIOS (again)#,#LILO ### GRUB #####, #Remove root prompt on the kernel#, #####, and #Restricting system reboots through the console#.

Before connecting to any network, especially if it's a public one you should, at the very least, execute a security update (see #####). Optionally, you could take a snapshot of your system (see #Taking a snapshot of the system#).

Subscribe to the Debian Security Announce mailing list

In order to receive information on available security updates you should subscribe yourself to the debian-security-announce mailing list in order to receive the Debian Security Advisories (DSAs). See #The Debian Security Team# for more information on how the Debian security team works. For information on how to subscribe to the Debian mailing lists read <http://lists.debian.org>.

DSAs are signed with the Debian Security Team's signature which can be retrieved from <http://security.debian.org>.

You should consider, also, subscribing to the <http://lists.debian.org/debian-security> for general discussion on security issues in the Debian operating system. You will be able to contact other fellow system administrators in the list as well as Debian developers and upstream developers of security tools who can answer your questions and offer advice.

FIXME: Add the key here too?

#####

As soon as new security bugs are detected in packages, Debian maintainers and upstream authors generally patch them within days or even hours. After the bug is fixed, a new package is provided on <http://security.debian.org>.

If you are installing a Debian release you must take into account that since the release was made there might have been security updates after it has been determined that a given package is vulnerable. Also, there might have been minor releases (there have been four for the Debian 3.0 *sarge* release) which include these package updates.

During installation security updates are configured for your system and pending updates downloaded and applied, unless you specifically opt out of this or the system was not connected to the Internet. The updates are applied even before the first boot, so the new system starts its life as up to date as possible.

To manually update the system, put the following line in your `sources.list` and you will get security updates automatically, whenever you update your system. Replace `[CODENAME]` with the release codename, e.g. *squeeze*.

```
deb http://security.debian.org/ [CODENAME]/updates main contrib non-free
```

Note: If you are using the *testing* branch use the security testing mirror sources as described in #Security support for the testing branch#.

Once you've done this you can use multiple tools to upgrade your system. If you are running a desktop system you will have¹ an application called **update-notifier** that will make it easy to check if new updates are available, by selecting it you can make a system upgrade from the desktop (using **update-manager**). For more information see #Checking for updates at the Desktop#. In desktop environments you can also use synaptic (GNOME), kpackage or adept (KDE) for more advanced interfaces. If you are running a text-only terminal you can use aptitude, apt or dselect (deprecated) to upgrade:

- If you want to use aptitude's text interface you just have to press *u* (update) followed by *g* (to upgrade). Or just do the following from the command line (as root):

```
# aptitude update
# aptitude upgrade
```

- If you want to use apt do just like with aptitude but substitute the **aptitude** lines above with **apt-get**.
- If you want to use dselect then first [U]pdate, then [I]ninstall and finally, [C]onfigure the installed/upgraded packages.

If you like, you can add the deb-src lines to `/etc/apt/sources.list` as well. See `apt(8)` for further details.

Security update of libraries

Once you have executed a security update you might need to restart some of the system services. If you do not do this, some services might still be vulnerable after a security upgrade. The reason for this is that daemons that are running before an upgrade might still be using the old libraries before the upgrade².

From Debian *Jessie* and up, you can install the `needrestart` package, which will run automatically after each APT upgrade and prompt you to restart services that are affected by the just-installed updates. In earlier releases, you can run the `checkrestart` program (available in the `debian-goodies` package) manually after your APT upgrade.

Some packages (like `libc6`) will do this check in the `postinst` phase for a limited set of services specially since an upgrade of essential libraries might break some applications (until restarted)³.

Bringing the system to run level 1 (single user) and then back to run level 3 (multi user) should take care of the restart of most (if not all) system services. But this is not an option if you are executing the security upgrade from a remote connection (like `ssh`) since it will be severed.

Excercise caution when dealing with security upgrades if you are doing them over a remote connection like `ssh`. A suggested procedure for a security upgrade that involves a service restart is to restart the `SSH` daemon and then, immediately, attempt a new `ssh` connection without breaking the previous one. If the connection fails, revert the upgrade and investigate the issue.

Security update of the kernel

First, make sure your kernel is being managed through the packaging system. If you have installed using the installation system from Debian 3.0 or previous releases, your kernel is *not* integrated into the packaging system and might be out of date. You can easily confirm this by running:

¹ In *Etch* and later releases

² Even though the libraries have been removed from the filesystem the inodes will not be cleared up until no program has an open file descriptor pointing to them.

³ This happened, for example, in the upgrade from `libc6 2.2.x` to `2.3.x` due to NSS authentication issues, see <http://lists.debian.org/debian-glibc/2003/03/msg00276.html>.

```
$ dpkg -S `readlink -f /vmlinuz`
linux-image-2.6.18-4-686: /boot/vmlinuz-2.6.18-4-686
```

If your kernel is not being managed you will see a message saying that the package manager did not find the file associated to any package instead of the message above, which says that the file associated to the current running kernel is being provided by the linux-image-2.6.18-4-686. So first, you will need to manually install a kernel image package. The exact kernel image you need to install depends on your architecture and your preferred kernel version. Once this is done, you will be able to manage the security updates of the kernel just like those of any other package. In any case, notice that the kernel updates will *only* be done for kernel updates of the same kernel version you are using, that is, **apt** will not automatically upgrade your kernel from the 2.4 release to the 2.6 release (or from the 2.4.26 release to the 2.4.27 release⁴).

The installation system of recent Debian releases will handle the selected kernel as part of the package system. You can review which kernels you have installed by running:

```
$ COLUMNS=150 dpkg -l 'linux-image*' | awk '$1 ~ /ii/ { print $0 }'
```

To see if your kernel needs to be updated run:

```
$ kernfile=`readlink -f /vmlinuz`
$ kernel=`dpkg -S $kernfile | awk -F : '{print $1}'`
$ apt-cache policy $kernel
linux-image-2.6.18-4-686:
  Installed: 2.6.18.dfsg.1-12
  Candidate: 2.6.18.dfsg.1-12
  Version table:
*** 2.6.18.dfsg.1-12 0
    100 /var/lib/dpkg/status
```

If you are doing a security update which includes the kernel image you *need* to reboot the system in order for the security update to be useful. Otherwise, you will still be running the old (and vulnerable) kernel image.

If you need to do a system reboot (because of a kernel upgrade) you should make sure that the kernel will boot up correctly and network connectivity will be restored, specially if the security upgrade is done over a remote connection like ssh. For the former you can configure your boot loader to reboot to the original kernel in the event of a failure (for more detailed information read Remotely rebooting Debian GNU/Linux machines [<http://www.debian-administration.org/?article=70>]). For the latter you have to introduce a network connectivity test script that will check if the kernel has started up the network subsystem properly and reboot the system if it did not⁵. This should prevent nasty surprises like updating the kernel and then realizing, after a reboot, that it did not detect or configure the network hardware properly and you need to travel a long distance to bring the system up again. Of course, having the system serial console⁶ in the system connected to a console or terminal server should also help debug reboot issues remotely.

⁴ Unless you have installed a kernel metapackage like linux-image-2.6-686 which will always pull in the latest kernel minor revision for a kernel release and a given architecture.

⁵ A sample script called testnet [<http://www.debian-administration.org/articles/70/testnet>] is available in the Remotely rebooting Debian GNU/Linux machines [<http://www.debian-administration.org/?article=70>] article. A more elaborate network connectivity testing script is available in this Testing network connectivity article. [<http://www.debian-administration.org/?article=128>]

⁶ Setting up a serial console is beyond the scope of this document, for more information read the Serial HOWTO [<http://www.tldp.org/HOWTO/Serial-HOWTO.html>] and the Remote Serial Console HOWTO [<http://www.tldp.org/HOWTO/Remote-Serial-Console-HOWTO/index.html>].

Change the BIOS (again)

Remember #BIOS #####? Well, then you should now, once you do not need to boot from removable media, to change the default BIOS setup so that it *only* boots from the hard drive. Make sure you will not lose the BIOS password, otherwise, in the event of a hard disk failure you will not be able to return to the BIOS and change the setup so you can recover it using, for example, a CD-ROM.

Another less secure but more convenient way is to change the setup to have the system boot up from the hard disk and, if it fails, try removable media. By the way, this is often done because most people don't use the BIOS password that often; it's easily forgotten.

LILLO ### GRUB

Anybody can easily get a root-shell and change your passwords by entering

```
<name-of-your-bootimage> init=/bin/sh
```

```
##### #<name-of-your-bootimage> init=/bin/sh## ##### root #####
##### root #####
##### root ##### root #####
#####
```

For LILO you need to edit the config file `/etc/lilo.conf` and add a **password** and **restricted** line as in the example below.

```
image=/boot/2.2.14-vmlinuz
  label=Linux
  read-only
  password=hackme
  restricted
```

Then, make sure that the configuration file is not world readable to prevent local users from reading the password. When done, rerun lilo. Omitting the `restricted` line causes lilo to always prompt for a password, regardless of whether LILO was passed parameters. The default permissions for `/etc/lilo.conf` grant read and write permissions to root, and enable read-only access for `lilo.conf`'s group, root.

```
LILLO ##### GRUB #####/boot/grub/menu.lst # ##### 2 #####(#####hackme#
#####) #####
##### 3 #####
```

```
timeout 3
password hackme
```

```
#####grub-md5-crypt ##### grub # #####
##### (md5) #####grub # md5 #####
#####:
```

```
timeout 3
password --md5 $1$bw0ez$tljnxKLFmzmnDVaQWgjp0

grub # md5 ##### --md5 ##### ##### hackme # md5 #####
##### md5 ##### grub ##### grub-doc #####
```

Disable root prompt on the initramfs

Note: This applies to the default kernels provided for releases after Debian 3.1

Linux 2.6 kernels provide a way to access a root shell while booting which will be presented during loading the initramfs on error. This is helpful to permit the administrator to enter a rescue shell with root permissions. This shell can be used to manually load modules when autodetection fails. This behavior is the default for **initramfs-tools** generated initramfs. The following message will appear:

```
"ALERT! /dev/sda1 does not exist. Dropping to a shell!"
```

In order to remove this behavior you need to set the following boot argument:*panic=0*. Add this to the variable `GRUB_CMDLINE_LINUX` in `/etc/default/grub` and issue **update-grub** or to the append section of `/etc/lilo.conf`.

Remove root prompt on the kernel

Note: This does not apply to the kernels provided for Debian 3.1 as the timeout for the kernel delay has been changed to 0.

Linux 2.4 kernels provide a way to access a root shell while booting which will be presented just after loading the cramfs file system. A message will appear to permit the administrator to enter an executable shell with root permissions, this shell can be used to manually load modules when autodetection fails. This behavior is the default for **initrd**'s `linuxrc`. The following message will appear:

```
Press ENTER to obtain a shell (waits 5 seconds)
```

In order to remove this behavior you need to change `/etc/mkinitrd/mkinitrd.conf` and set:

```
# DELAY The number of seconds the linuxrc script should wait to
# allow the user to interrupt it before the system is brought up
DELAY=0
```

Then regenerate your ramdisk image. You can do this for example with:

```
# cd /boot
# mkinitrd -o initrd.img-2.4.18-k7 /lib/modules/2.4.18-k7
```

or (preferred):

```
# dpkg-reconfigure -plow kernel-image-2.4.x-yz
```

#####

```
##### (su # sudo #) #####
##### Debian ##### /etc/login.defs ##### PAM ##### /etc/securetty #
#####
```

`/etc/pam.d/login` In older Debian releases you would need to edit `login.defs`, and use the `CONSOLE` variable which defines a file or list of terminals on which root logins are allowed. enables the `pam_securetty.so` module. This module, when properly configured will not ask for a password when the root user tries to login on an insecure console, rejecting access as this user.

`securetty` The `/etc/securetty` is a configuration file that belongs to the login package. by adding/removing the terminals to which root access will be allowed. If you wish to allow only local console access then you need `console`, `ttyX` Or `ttyvX` in GNU/FreeBSD, and `ttyE0` in GNU/KNetBSD. and `vc/X` (if using `devfs` devices), you might want to add also `ttySX` Or `comX` in GNU/Hurd, `cuaaX` in GNU/FreeBSD, and `ttyXX` in GNU/KNetBSD. if you are using a serial console for local access (where X is an integer, you might want to have multiple instances. The default configuration for *Wheezy* The default configuration in *woody* includes 12 local tty and vc consoles, as well as the `console` device but does not allow remote logins. In *sarge* the default configuration provides 64 consoles for tty and vc consoles. includes many tty devices, serial ports, vc consoles as well as the X server and the `console` device. You can safely adjust this if you are not using that many consoles. You can confirm the virtual consoles and the tty devices you have by reviewing `/etc/inittab` Look for the `getty` calls. . For more information on terminal devices read the Text-Terminal-HOWTO [<http://tldp.org/HOWTO/Text-Terminal-HOWTO-6.html>]

```
PAM ##### /etc/pam.d/login #####
(###) ##### nulloK #####:
```

```
auth      required  pam_unix.so nullok
```

Restricting system reboots through the console

If your system has a keyboard attached to it anyone (yes *anyone*) with physical access to the system can reboot the system through it without login in just pressing the `Ctrl+Alt+Delete` keyboard combination, also known as the *three finger salute*. This might, or might not, adhere to your security policy.

This is aggravated in environments in which the operating system is running virtualised. In these environments, the possibility extends to users that have access to the virtual console (which might be accessed over the network). Also note that, in these environments, this keyboard combination is used constantly (to open a login shell in some GUI operating systems) and an administrator might *virtually* send it and force a system reboot.

There are two ways to restrict this:

- configure it so that only *allowed* users can reboot the system,
- disable this feature completely.

If you want to restrict this, you must check the `/etc/inittab` so that the line that includes `ctrlaltdel` calls `shutdown` with the `-a` switch.

The default in Debian includes this switch:

#####

```
ca:12345:ctrlaltdel:/sbin/shutdown -t1 -a -r now
```

The `-a` switch, as the `shutdown(8)` manpage describes, makes it possible to allow *some* users to shutdown the system. For this the file `/etc/shutdown.allow` must be created and the administrator has to include there the name of users which can boot the system. When the *three finger salute* combination is pressed in a console the program will check if any of the users listed in the file are logged in. If none of them is, **shutdown** will *not* reboot the system.

If you want to disable the Ctrl+Alt+Del combination you just need to comment the line with the `ctrlaltdel` definition in the `/etc/inittab`.

Remember to run `init q` after making any changes to the `/etc/inittab` file for the changes to take effect.

Restricting the use of the Magic SysRq key

The *Magic SysRq key* is a key combination that allows users connected to the system console of a Linux kernel to perform some low-level commands. These low-level commands are sent by pressing simultaneously `Alt+SysRq` and a command key. The SysRq key in many keyboards is labeled as the *Print Screen* key.

Since the Etch release, the Magic SysRq key feature is enabled in the Linux kernel to allow console users certain privileges. You can confirm this by checking if the `/proc/sys/kernel/sysrq` exists and reviewing its value:

```
$ cat /proc/sys/kernel/sysrq
438
```

The default value shown above allows all of the SysRq functions except for the possibility of sending signals to processes. For example, it allow users connected to the console to remount all systems read-only, reboot the system or cause a kernel panic. In all the features are enabled, or in older kernels (earlier than 2.6.12) the value will be just 1.

You should disable this functionality if access to the console is not restricted to authorised users: the console is connected to a modem line, there is easy physical access to the system or it is running in a virtualised environment and other users access the console. To do this edit the `/etc/sysctl.conf` and add the following lines:

```
# Disables the magic SysRq key
kernel.sysrq = 0
```

For more information, read security chapter in the Remote Serial Console HOWTO [<http://tldp.org/HOWTO/Remote-Serial-Console-HOWTO/security-sysrq.html>], Kernel SysRQ documentation [<https://www.kernel.org/doc/Documentation/admin-guide/sysrq.rst>]. and the Magic_SysRq_key wikipedia entry [http://en.wikipedia.org/wiki/Magic_SysRq_key].

#####

When mounting an Ext file system (`ext2`, `ext3` or `ext4`), there are several additional options you can apply to the mount call or to `/etc/fstab`. For instance, this is my `fstab` entry for the `/tmp` partition:

#####

```
/dev/hda7 /tmp ext2 defaults,nosuid,noexec,nodev 0 2
```

```
#####nosuid ##### setuid # setgid #####noexec ### #####  
##### nodev #####
```

- only applies to ext2 or ext3 file systems

- #####

```
noexec#####
```

```
alex@joker:/tmp# mount | grep tmp  
/dev/hda7 on /tmp type ext2 (rw,noexec,nosuid,nodev)  
alex@joker:/tmp# ./date  
bash: ./date: Permission denied  
alex@joker:/tmp# /lib/ld-linux.so.2 ./date  
Sun Dec 3 17:49:23 CET 2000
```

Newer versions of the kernel do however handle the noexec flag properly:

```
angrist:/tmp# mount | grep /tmp  
/dev/hda3 on /tmp type ext3 (rw,noexec,nosuid,nodev)  
angrist:/tmp# ./date  
bash: ./tmp: Permission denied  
angrist:/tmp# /lib/ld-linux.so.2 ./date  
./date: error while loading shared libraries: ./date: failed to map segment  
from shared object: Operation not permitted
```

```
##### script kiddie # /tmp #####script kiddie #####  
##### /tmp # PATH ##### /tmp #####  
#####
```

```
/tmp ##### Debconf ##### (###?) ###  
##### Bug http://bugs.debian.org/116448 #####
```

The following is a more thorough example. A note, though: /var could be set noexec, but some software⁷ keeps its programs under in /var. The same applies to the nosuid option.

```
/dev/sda6 /usr ext2 defaults,ro,nodev 0 2  
/dev/sda12 /usr/share ext2 defaults,ro,nodev,nosuid 0 2  
/dev/sda7 /var ext2 defaults,nodev,usrquota,grpquota 0 2  
/dev/sda8 /tmp ext2 defaults,nodev,nosuid,noexec,usrquota,grpq  
/dev/sda9 /var/tmp ext2 defaults,nodev,nosuid,noexec,usrquota,grpq  
/dev/sda10 /var/log ext2 defaults,nodev,nosuid,noexec 0 2  
/dev/sda11 /var/account ext2 defaults,nodev,nosuid,noexec 0 2  
/dev/sda13 /home ext2 rw,nosuid,nodev,exec,auto,nouser,async,usr  
/dev/fd0 /mnt/fd0 ext2 defaults,users,nodev,nosuid,noexec 0 0  
/dev/fd0 /mnt/floppy vfat defaults,users,nodev,nosuid,noexec 0 0  
/dev/hda /mnt/cdrom iso9660 ro,users,nodev,nosuid,noexec 0 0
```

⁷ Some of this includes the package manager dpkg since the installation (post,pre) and removal (post,pre) scripts are at /var/lib/dpkg/ and Smartlist

Setting /tmp noexec

```
/tmp # noexec ##### /tmp # #####
##### APT::ExtractTemplates::TempDir (apt-extracttemplates(1) #####) #####
#####apt # ##### (http://bugs.debian.org/116448 # #####)#/etc/apt/apt.conf #
##### /tmp #####
```

/usr

```
/usr ##### Debian GNU/Linux #####
##### #####apt # (Debian 3.0 #woody####) ####
#####
```

```
##### /etc/apt/apt.conf #####:
```

```
DPkg
{
    Pre-Invoke { "mount /usr -o remount,rw" };
    Post-Invoke { "mount /usr -o remount,ro" };
};
```

Note that the Post-Invoke may fail with a "/usr busy" error message. This happens mainly when you are using files during the update that got updated. You can find these programs by running

```
# ls -lsof +L1
```

Stop or restart these programs and run the Post-Invoke manually. *Beware!* This means you'll likely need to restart your X session (if you're running one) every time you do a major upgrade of your system. You might want to reconsider whether a read-only /usr is suitable for your system. See also this [discussion on debian-devel about read-only](http://lists.debian.org/debian-devel/2001/11/threads.html#00212) [http://lists.debian.org/debian-devel/2001/11/threads.html#00212].

Providing secure user access

#####: PAM

PAM (Pluggable Authentication Modules) allows system administrators to choose how applications authenticate users. Note that PAM can do nothing unless an application is compiled with support for PAM. Most of the applications that are shipped with Debian have this support built in (Debian did not have PAM support before 2.2). The current default configuration for any PAM-enabled service is to emulate UNIX authentication (read `/usr/share/doc/libpam0g/Debian-PAM-MiniPolicy.gz` for more information on how PAM services *should* work in Debian).

Each application with PAM support provides a configuration file in `/etc/pam.d/` which can be used to modify its behavior:

- what backend is used for authentication.
- what backend is used for sessions.
- how do password checks behave.

The following description is far from complete, for more information you might want to read the Linux-PAM Guides [<https://packages.debian.org/sid/libpam-doc>] as a reference. This documentation is available in the system if you install the libpam-doc at `/usr/share/doc/libpam-doc/html/`.

```
PAM ##### Berkeley ##### passwd ##### ##
#####PAM # #####
##### 2 #####requisite#####
#####
```

Password security in PAM

Review the `/etc/pam.d/common-password`, included by `/etc/pam.d/passwd`⁸ This file is included by other files in `/etc/pam.d/` to define the behaviour of password use in subsystems that grant access to services in the machine, like the console login (`login`), graphical login managers (such as `gdm` or `lightdm`), and remote login (such as `ssh`). This definition is

You have to make sure that the `pam_unix.so` module uses the "sha512" option to use encrypted passwords. This is the default in Debian Squeeze.

The line with the definition of the `pam_unix` module will look something like:

```
password [success=1 default=ignore] pam_unix.so nullok obscure minlen=8 s
```

This definition:

- Enforces password encryption when storing passwords, using the SHA-512 hash function (option `sha512`),
- Enables password complexity checks (option `obscure`) as defined in the `pam_unix(8)` manpage,
- Imposes a minimum password length (option `min`) of 8.

You have to ensure that encrypted passwords are used in PAM applications, since this helps protect against dictionary cracks. Using encryption also makes it possible to use passwords longer than 8 characters.

Since this module is also used to define how passwords are changed (it is included by `chpasswd`) you can strengthen the password security in the system by installing `libpam-cracklib` and introducing this definition in the `/etc/pam.d/common-password` configuration file:

```
# Be sure to install libpam-cracklib first or you will not be able to log in
password required pam_cracklib.so retry=3 minlen=12 difok=3
password [success=1 default=ignore] pam_unix.so obscure minlen=8 sha512 u
```

So, what does this incantation do? The first line loads the `cracklib` PAM module, which provides password strength-checking, prompts for a new password with a minimum size⁹ of 12 characters, and difference of at least 3 characters from the old password, and allows 3 retries. `Cracklib` depends on a wordlist package (such as `wenglish`, `wspanish`, `wbritish`, ...), so make sure you install one that is appropriate for your language or `cracklib` might not be useful to you at all.

The second line (using the `pam_unix.so` module) is the default configuration in Debian, as described above, save for the `use_authok` option. The `use_authok` option is required if `pam_unix.so` is stacked after

⁸ In old Debian releases the configuration of the modules was defined directly in `/etc/pam.d/passwd`.

⁹ The `minlen` option is not entirely straightforward and is not exactly the number of characters in the password. A tradeoff can be defined between complexity and length by adjusting the "credit" parameters of different character classes. For more information read the `pam_cracklib(8)` manpage.

pam_cracklib.so, and is used to hand over the password from the previous module. Otherwise, the user would be prompted for the password twice.

For more information about setting up Cracklib, read the pam_cracklib(8) manpage and the article Linux Password Security with pam_cracklib [http://www.deer-run.com/~hal/sysadmin/pam_cracklib.html] by Hal Pomeranz.

By enabling the cracklib PAM module you setup a policy that forces users to use strong passwords.

Alternatively, you can setup and configure PAM modules to use double factor authentication such as: libpam-barada, libpam-google-authenticator, libpam-oath, libpam-otpw, libpam-poldi, libpam-usb or libpam-yubico. The configuration of these modules would make it possible to access the system using external authentication mechanisms such as smartcards, external USB keys, or One-Time-Passwords generated by external applications running, for example, in the user's mobile phone.

Please note that these restrictions apply to all users but *not* to the password changes done by the root user. The root user will be able to set up any password (any length or complexity) for personal use or others regardless of the restrictions defined here.

User access control in PAM

```
root ##### /etc/pam.d/login #####
```

```
auth    requisite pam_securetty.so
```

Then you should modify the list of terminals on which direct root login is allowed in `/etc/securetty` (as described in `#####`). Alternatively, you could enable the `pam_access` module and modify `/etc/security/access.conf` which allows for a more general and fine-tuned access control, but (unfortunately) lacks decent log messages (logging within PAM is not standardized and is particularly unrewarding problem to deal with). We'll return to `access.conf` a little later.

User limits in PAM

The following line should be enabled in `/etc/pam.d/login` to set up user resource limits.

```
session required pam_limits.so
```

```
##### #Limiting resource usage: the limits.conf file# ##### ##
##(#####) #####
```

Control of su in PAM

```
##### su #### root ##### su # #####wheel##### (###
#####)#####)#root ##### root #### #su #####
##### /etc/pam.d/su #####:
```

```
auth    requisite pam_wheel.so group=wheel debug
```

```
### wheel ##### root ##### su # ##### root ##### root ###
#####
```

#####

```
##### PAM ##### (#####) #####  
#####ref#### ssh ##### ref # /etc/sshusers-allowed # #  
##### /etc/pam.d/ssh #####:
```

```
auth required pam_listfile.so item=user sense=allow file=/etc/sshusers-a
```

Temporary directories in PAM

Since there have been a number of so called insecure tempfile vulnerabilities, tthttpd is one example (see DSA-883-1 [<http://www.debian.org/security/2005/dsa-883>]), the libpam-tmpdir is a good package to install. All you have to do is add the following to `/etc/pam.d/common-session`:

```
session optional pam_tmpdir.so
```

There has also been a discussion about adding this by default in Debian configuration, but it s. See <http://lists.debian.org/debian-devel/2005/11/msg00297.html> for more information.

Configuration for undefined PAM applications

```
##### /etc/pam.d/other #####:
```

```
auth required pam_securetty.so  
auth required pam_unix_auth.so  
auth required pam_warn.so  
auth required pam_deny.so  
account required pam_unix_acct.so  
account required pam_warn.so  
account required pam_deny.so  
password required pam_unix_passwd.so  
password required pam_warn.so  
password required pam_deny.so  
session required pam_unix_session.so  
session required pam_warn.so  
session required pam_deny.so
```

```
##### PAM ##### (#####)#
```

Limiting resource usage: the `limits.conf` file

You should really take a serious look into this file. Here you can define user resource limits. In old releases this configuration file was `/etc/limits.conf`, but in newer releases (with PAM) the `/etc/security/limits.conf` configuration file should be used instead.

If you do not restrict resource usage, *any* user with a valid shell in your system (or even an intruder who compromised the system through a service or a daemon going awry) can use up as much CPU, memory, stack, etc. as the system can provide. This *resource exhaustion* problem can be fixed by the use of PAM.

There is a way to add resource limits to some shells (for example, **bash** has **ulimit**, see `bash(1)`), but since not all of them provide the same limits and since the user can change shells (see `chsh(1)`) it is better to place the limits on the PAM modules as they will apply regardless of the shell used and will also apply to PAM modules that are not shell-oriented.

Resource limits are imposed by the kernel, but they need to be configured through the `limits.conf` and the PAM configuration of the different services need to load the appropriate PAM. You can check which services are enforcing limits by running:

```
$ find /etc/pam.d/ \! -name "*.dPKG*" | xargs -- grep limits |grep -v ":#"
```

Commonly, `login`, `ssh` and the graphic session managers (`gdm`, `kdm` or `xdm`) should enforce user limits but you might want to do this in other PAM configuration files, such as `cron`, to prevent system daemons from taking over all system resources.

The specific limits settings you might want to enforce depend on your system's resources, that's one of the main reasons why no limits are enforced in the default installation.

For example, the configuration example below enforces a 100 process limit for all users (to prevent *fork bombs*) as well as a limit of 10MB of memory per process and a limit of 10 simultaneous logins. Users in the `adm` group have higher limits and can produce core files if they want to (there is only a *soft* limit).

```
*          soft    core    0
*          hard    core    0
*          hard    rss     1000
*          hard    memlock 1000
*          hard    nproc   100
*          -      maxlogins 1
*          hard    data    102400
*          hard    fsize   2048
@adm       hard    core    100000
@adm       hard    rss     100000
@adm       soft    nproc   2000
@adm       hard    nproc   3000
@adm       hard    fsize   100000
@adm       -      maxlogins 10
```

These would be the limits a default user (including system daemons) would have:

```
$ ulimit -a
core file size          (blocks, -c) 0
data seg size           (kbytes, -d) 102400
file size               (blocks, -f) 2048
max locked memory       (kbytes, -l) 10000
max memory size         (kbytes, -m) 10000
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
stack size              (kbytes, -s) 8192
cpu time                (seconds, -t) unlimited
max user processes      (-u) 100
virtual memory          (kbytes, -v) unlimited
```

And these are the limits for an administrative user:

```
$ ulimit -a
core file size          (blocks, -c) 0
```

```

data seg size      (kbytes, -d) 102400
file size          (blocks, -f) 100000
max locked memory  (kbytes, -l) 100000
max memory size    (kbytes, -m) 100000
open files         (-n) 1024
pipe size          (512 bytes, -p) 8
stack size         (kbytes, -s) 8192
cpu time           (seconds, -t) unlimited
max user processes (-u) 2000
virtual memory     (kbytes, -v) unlimited

```

For more information read:

- PAM reference guide for available modules [<https://web.archive.org/web/20030601112932/http://www.kernel.org/pub/linux/libs/pam/Linux-PAM-html/pam-6.html>]
- PAM configuration article [<https://web.archive.org/web/20030217012148/http://www.samag.com/documents/s=1161/sam0009a/0009a.htm>].
- Seifried's Securing Linux Step by Step [<http://seifried.org/security/os/linux/20020324-securing-linux-step-by-step.html>] on the *Limiting users overview* section.
- LASG [<http://seifried.org/lasg/users/>] in the *Limiting and monitoring users* section.

User login actions: edit /etc/login.defs

The next step is to edit the basic configuration and action upon user login. Note that this file is not part of the PAM configuration, it's a configuration file honored by `login` and `su` programs, so it doesn't make sense tuning it for cases where neither of the two programs are at least indirectly called (the `getty` program which sits on the consoles and offers the initial login prompt *does* invoke `login`).

```

FAILLOG_ENAB      yes

#####

LOG_UNKFAIL_ENAB  yes

If you set this variable to 'yes' it will record unknown usernames if the login failed. It is best if you use
'no' (the default) since, otherwise, user passwords might be inadvertently logged here (if a user mistypes
and they enter their password as the username). If you set it to 'yes', make sure the logs have the proper
permissions (640 for example, with an appropriate group setting such as adm).

SYSLOG_SU_ENAB    yes

### su ### syslog #####

SYSLOG_SG_ENAB    yes

SYSLOG_SU_ENAB #### sg #####

ENCRYPT_METHOD     SHA512

```

As stated above, encrypted passwords greatly reduce the problem of dictionary attacks, since you can use longer passwords. This definition has to be consistent with the value defined in `/etc/pam.d/common-password`.

User login actions: edit `/etc/pam.d/login`

You can adjust the login configuration file to implement an stricter policy. For example, you can change the default configuration and increase the delay time between login prompts. The default configuration sets a 3 seconds delay:

```
auth optional pam_faildelay.so delay=3000000
```

Increasing the `delay` value to a higher value to make it harder to use the terminal to log in using brute force. If a wrong password is typed in, the possible attacker (or normal user!) has to wait longer seconds to get a new login prompt, which is quite time consuming when you test passwords. For example, if you set `delay=10000000`, users will have to wait 10 seconds if they type a wrong password.

In this file you can also set the system to present a message to users before a user logs in. The default is disabled, as shown below:

```
# auth required pam_issue.so issue=/etc/issue
```

If required by your security policy, this file can be used to show a standard message indicating that access to the system is restricted and user access is logged. This kind of disclaimer might be required in some environments and jurisdictions. To enable it, just include the relevant information in the `/etc/issue`¹⁰ file and uncomment the line enabling the `pam_issue.so` module in `/etc/pam.d/login`. In this file you can also enable additional features which might be relevant to apply local security policies such as:

- setting rules for which users can access at which times, by enabling the `pam_time.so` module and configuring `/etc/security/time.conf` accordingly (disabled by default),
- setup login sessions to use user limits as defined in `/etc/security/limits.conf` (enabled by default),
- present the user with the information of previous login information (enabled by default),
- print a message (`/etc/motd` and `/run/motd.dynamic`) to users after login in (enabled by default),

Restricting ftp: editing `/etc/ftpusers`

```
##### ftp #####)#####ftp #####)##### (###
ftp #####)##### PAM #####)#####
#####)#####
```

FIXME (BUG): Is it a bug that the default `ftpusers` in Debian does *not* include all the administrative users (in `base-passwd`).

A convenient way to add all system accounts to the `/etc/ftpusers` is to run

```
$ awk -F : '{if ($3<1000) print $1}' /etc/passwd > /etc/ftpusers
```

¹⁰ The default content of this file provides information about the operating system and version run by the system, which you might not want to provide to anonymous users.

su

```
##### su #####
####root ##### su ##### sudo ##### su #####
### #####su ##### Unixes #####
```

sudo

```
sudo ##### root ##### /etc/sudoers # #####
#####/etc/sudoers #####
##### root #####
```

Disallow remote administrative access

You should also modify `/etc/security/access.conf` to disallow remote logins to administrative accounts. This way users need to invoke **su** (or **sudo**) to use any administrative powers and the appropriate audit trace will always be generated.

You need to add the following line to `/etc/security/access.conf`, the default Debian configuration file has a sample line commented out:

```
-:wheel:ALL EXCEPT LOCAL
```

Remember to enable the `pam_access` module for every service (or default configuration) in `/etc/pam.d/` if you want your changes to `/etc/security/access.conf` honored.

#####

```
#### (pop3 ##### ftp) ##### Debian
GNU/Linux ## PAM #### libpam ##### (radius # ldap ##) ##### ##
#####
```

```
##### (/
dev/null) ### (/etc/shells #####) #####
##### /bin/rbash ##### bash # -r ##### (RESTRICTED SHELL
bash(1) # #####) ##### (#####) #####
#####
```

Debian currently provides in the unstable release (and might be included in the next stable releases) the `pam_chroot` module (in the `libpam-chroot`). An alternative to it is to **chroot** the service that provides remote logging (**ssh**, **telnet**).¹¹

```
##### /etc/security/access.conf #####
```

Information on how to **chroot** users accessing the system through the **ssh** service is described in `#Chroot environment for SSH#`.

User auditing

If you are really paranoid you might want to add a system-wide configuration to audit what the users are doing in your system. This sections presents some tips using diverse utilities you can use.

¹¹ `libpam-chroot` has not been yet thoroughly tested, it does work for **login** but it might not be easy to set up the environment for other programs

Input and output audit with script

You can use the **script** command to audit both what the users run and what are the results of those commands. You cannot setup **script** as a shell (even if you add it to `/etc/shells`). But you can have the shell initialization file run the following:

```
umask 077
exec script -q -a "/var/log/sessions/$USER"
```

Of course, if you do this system wide it means that the shell would not continue reading personal initialization files (since the shell gets overwritten by **script**). An alternative is to do this in the user's initialization files (but then the user could remove this, see the comments about this below)

You also need to setup the files in the audit directory (in the example `/var/log/sessions/`) so that users can write to it but cannot remove the file. This could be done, for example, by creating the user session files in advance and setting them with the *append-only* flag using **chattr**.

A useful alternative for sysadmins, which includes date information would be:

```
umask 077
exec script -q -a "/var/log/sessions/$USER-`date +%Y%m%d`"
```

Using the shell history file

If you want to review what does the user type in the shell (but not what the result of that is) you can setup a system-wide `/etc/profile` that configures the environment so that all commands are saved into a history file. The system-wide configuration needs to be setup in such a way that users cannot remove audit capabilities from their shell. This is somewhat shell specific so make sure that all users are using a shell that supports this.

For example, for bash, the `/etc/profile` could be set as follows ¹²:

```
HISTFILE=~/.bash_history
HISTSIZE=10000
HISTFILESIZE=999999
# Don't let the users enter commands that are ignored
# in the history file
HISTIGNORE=" "
HISTCONTROL=" "
readonly HISTFILE
readonly HISTSIZE
readonly HISTFILESIZE
readonly HISTIGNORE
readonly HISTCONTROL
export HISTFILE HISTSIZE HISTFILESIZE HISTIGNORE HISTCONTROL
```

For this to work, the user can only append information to `.bash_history` file. You need *also* to set the *append-only* option using **chattr** program for `.bash_history` for all users. ¹³.

¹² Setting HISTSIZE to a very large number can cause issues under some shells since the history is kept in memory for every user session. You might be safer if you set this to a high-enough value and backup user's history files (if you need all of the user's history for some reason)

¹³ Without the append-only flag users would be able to empty the contents of the history file running `> .bash_history`

#####

Note that you could introduce the configuration above in the user's `.profile`. But then you would need to setup permissions properly in such a way that prevents the user from modifying this file. This includes: having the user's home directories *not* belong to the user (since the user would be able to remove the file otherwise) but at the same time allow the user to read the `.profile` configuration file and write on the `.bash_history`. It would be good to set the *immutable* flag (also using **chattr**) for `.profile` too if you do it this way.

Complete user audit with accounting utilities

```
##### acct
#####

##### /var/account/ ##### pacct ##### acct#####
##### (sa # ac) #####
```

Other user auditing methods

If you are completely paranoid and want to audit every user's command, you could take **bash** source code, edit it and have it send all that the user typed into another file. Or have `ttysnoop` constantly monitor any new `ttys`¹⁴ and dump the output into a file. Other useful program is `snoopy` (see also github: <https://github.com/a2o/snoopy>) which is a user-transparent program that hooks in as a library providing a wrapper around `execve()` calls, any command executed is logged to **syslogd** using the `authpriv` facility (usually stored at `/var/log/auth.log`).

#####

```
##### wtmp #####
##### sac #####

#####
```

Setting users umasks

Depending on your user policy you might want to change how information is shared between users, that is, what the default permissions of new files created by users are.

Debian's default `umask` setting is `022` this means that files (and directories) can be read and accessed by the user's group and by any other users in the system. This definition is set in the standard configuration file `/etc/profile` which is used by all shells.

If Debian's default value is too permissive for your system you will have to change the `umask` setting for all the shells. More restrictive `umask` settings include `027` (no access is allowed to new files for the *other* group, i.e. to other users in the system) or `077` (no access is allowed to new files to the members the user's group). Debian (by default¹⁵) creates one group per user so that only the user is included in its group. Consequently `027` and `077` are equivalent as the user's group contains only the user.

This change is set by defining a proper `umask` setting for all users. You can change this by introducing an **umask** call in the shell configuration files: `/etc/profile` (source by all Bourne-compatible shells), `/etc/csh.cshrc`, `/etc/csh.login`, `/etc/zshrc` and probably some others (depending on the shells you have installed on your system). You can also change the `UMASK` setting in `/etc/login.defs`, Of all of these the last one that gets loaded by the shell takes precedence. The order

¹⁴ Ttys are spawned for local logins and remote logins through `ssh` and `telnet`

¹⁵ As defined in `/etc/adduser.conf` (`USERGROUPS=yes`). You can change this behaviour if you set this value to `no`, although it is not recommended

is: the default system configuration for the user's shell (i.e. `/etc/profile` and other system-wide configuration files) and then the user's shell (his `~/.profile`, `~/.bash_profile`, etc...). Some shells, however, can be executed with a `nologin` value which might skip sourcing some of those files. See your shell's manpage for additional information.

For connections that make use of **login** the `UMASK` definition in `/etc/login.defs` is used before any of the others. However, that value does not apply to user executed programs that do not use **login** such as those run through **su**, **cron** or **ssh**.

Don't forget to review and maybe modify the dotfiles under `/etc/skel/` since these will be new user's defaults when created with the **adduser** command. Debian default dotfiles do not include any **umask** call but if there is any in the dotfiles newly created users might a different value.

Note, however that users can modify their own `umask` setting if they want to, making it more permissive or more restricted, by changing their own dotfiles.

The `libpam-umask` package adjusts the users' default `umask` using PAM. Add the following, after installing the package, to `/etc/pam.d/common-session`:

```
session    optional    pam_umask.so umask=077
```

Finally, you should consider changing root's default 022 `umask` (as defined in `/root/.bashrc`) to a more strict `umask`. That will prevent the system administrator from inadvertently dropping sensitive files when working as root to world-readable directories (such as `/tmp`) and having them available for your average user.

Limiting what users can see/access

FIXME: Content needed. Describe the consequences of changing packages permissions when upgrading (an admin this paranoid should **chroot** his users BTW) if not using **dpkg-statoverride**.

If you need to grant users access to the system with a shell think about it very carefully. A user can, by default unless in a severely restricted environment (like a `chroot` jail), retrieve quite a lot of information from your system including:

- some configuration files in `/etc`. However, Debian's default permissions for some sensitive files (which might, for example, contain passwords), will prevent access to critical information. To see which files are only accessible by the root user for example

```
find /etc -type f -a -perm 600 -a -uid 0
```

as superuser.

- your installed packages, either by looking at the package database, at the `/usr/share/doc` directory or by guessing by looking at the binaries and libraries installed in your system.
- some log files at `/var/log`. Note also that some log files are only accessible to root and the `adm` group (try

```
find /var/log -type f -a -perm 640
```

) and some are even only available to the root user (try

```
find /var/log -type f -a -perm
600 -a -uid 0
```

).

What can a user see in your system? Probably quite a lot of things, try this (take a deep breath):

```
find / -type f -a -perm +006 2>/dev/null
find / -type d -a -perm +007 2>/dev/null
```

The output is the list of files that a user can *see* and the accessible directories.

Limiting access to other user's information

If you still grant shell access to users you might want to limit what information they can view from other users. Users with shell access have a tendency to create quite a number of files under their \$HOMEs: mailboxes, personal documents, configuration of X/GNOME/KDE applications...

In Debian each user is created with one associated group, and no two users belong to the same group. This is the default behavior: when an user account is created, a group of the same name is created too, and the user is assigned to it. This avoids the concept of a common *users* group which might make it more difficult for users to hide information from other users.

However, users' \$HOME directories are created with 0755 permissions (group-readable and world-readable). The group permissions is not an issue since only the user belongs to the group, however the world permissions might (or might not) be an issue depending on your local policy.

You can change this behavior so that user creation provides different \$HOME permissions. To change the behavior for *new* users when they get created, change *DIR_MODE* in the configuration file `/etc/adduser.conf` to 0750 (no world-readable access).

Users can still share information, but not directly in their \$HOME directories unless they change its permissions.

Note that disabling world-readable home directories will prevent users from creating their personal web pages in the `~/public_html` directory, since the web server will not be able to read one component in the path - namely their \$HOME directory. If you want to permit users to publish HTML pages in their `~/public_html`, then change *DIR_MODE* to 0751. This will allow the web server to access the final `public_html` directory (which itself should have a mode of 0755) and provide the content published by users. Of course, we are only talking about a default configuration here; users can generally tune modes of their own files completely to their liking, or you could keep content intended for the web in a separate location which is not a subdirectory of user's \$HOME directory.

Generating user passwords

There are many cases when an administrator needs to create many user accounts and provide passwords for all of them. Of course, the administrator could easily just set the password to be the same as the user's account name, but that would not be very sensitive security-wise. A better approach is to use a password generating program. Debian provides `makepasswd`, `apg` and `pwgen` packages which provide programs (the name is the same as the package) that can be used for this purpose. **Makepasswd** will generate true random passwords with an emphasis on security over pronounceability while **pwgen** will try to make meaningless but pronounceable passwords (of course this might depend on your mother language). **ApG** has algorithms to provide for both (there is a client/server version for this program but it is not included in the Debian package).

Passwd does not allow non-interactive assignation of passwords (since it uses direct tty access). If you want to change passwords when creating a large number of users you can create them using **adduser** with

the `--disabled-login` option and then use **usermod** or **chpasswd**¹⁶ (both from the `passwd` package so you already have them installed). If you want to use a file with all the information to make users as a batch process you might be better off using **newusers**.

Checking user passwords

User passwords can sometimes become the *weakest link* in the security of a given system. This is due to some users choosing weak passwords for their accounts (and the more of them that have access to it the greater the chances of this happening). Even if you established checks with the `cracklib` PAM module and password limits as described in #####: PAM# users will still be able to use weak passwords. Since user access might include remote shell access (over `ssh`, hopefully) it's important to make password guessing as hard as possible for the remote attackers, especially if they were somehow able to collect important information such as usernames or even the `passwd` and `shadow` files themselves.

A system administrator must, given a big number of users, check if the passwords they have are consistent with the local security policy. How to check? Try to crack them as an attacker would if having access to the hashed passwords (the `/etc/shadow` file).

An administrator can use `john` or `crack` (both are brute force password crackers) together with an appropriate wordlist to check users' passwords and take appropriate action when a weak password is detected. You can search for Debian GNU packages that contain word lists using **apt-cache search wordlist**, or visit some Internet wordlist sites.

Logging off idle users

Idle users are usually a security problem, a user might be idle maybe because he's out to lunch or because a remote connection hung and was not re-established. For whatever the reason, idle users might lead to a compromise:

- because the user's console might be unlocked and can be accessed by an intruder.
- because an attacker might be able to re-attach to a closed network connection and send commands to the remote shell (this is fairly easy if the remote shell is not encrypted as in the case of **telnet**).

Some remote systems have even been compromised through an idle (and detached) **screen**.

Automatic disconnection of idle users is usually a part of the local security policy that must be enforced. There are several ways to do this:

- If `bash` is the user shell, a system administrator can set a default `TMOUT` value (see `bash(1)`) which will make the shell automatically log off remote idle users. Note that it must be set with the `-o` option or users will be able to change (or unset) it.
- Install `timeoutd` and configure `/etc/timeouts` according to your local security policy. The daemon will watch for idle users and time out their shells accordingly.
- Install `autolog` and configure it to remove idle users.

The **timeoutd** or **autolog** daemons are the preferred method since, after all, users can change their default shell or can, after running their default shell, switch to another (uncontrolled) shell.

¹⁶ **Chpasswd** cannot handle MD5 password generation so it needs to be given the password in encrypted form before using it, with the

`-e`
option.

tcpwrappers

TCP wrappers were developed when there were no real packet filters available and access control was needed. Nevertheless, they're still very interesting and useful. The TCP wrappers allow you to allow or deny a service for a host or a domain and define a default allow or deny rule (all performed on the application level). If you want more information take a look at `hosts_access(5)` manual page.

Debian #####:

- `tcp wrapper` #### (`tcpd`) #####
- `libwrapper` #####

On the one hand, for services configured in `/etc/inetd.conf` (this includes **telnet**, **ftp**, **netbios**, **swat** and **finger**) you will see that the configuration file executes `/usr/sbin/tcpd` first. On the other hand, even if a service is not launched by the `inetd` superdaemon, support for the tcp wrappers rules can be compiled into it. Services compiled with tcp wrappers in Debian include **ssh**, **portmap**, **in.talk**, **rpc.statd**, **rpc.mountd**, **gdm**, **oaf** (the GNOME activator daemon), **nessus** and many others.

To see which packages use tcpwrappers ¹⁷ try:

```
$ apt-cache rdepends libwrap0
```

```
tcpchk #####wrapper ##### host.deny # hosts.allow ##
##### tcpchk ##### # /etc/inetd.conf ##
##### (#####)#
```

```
##### 2 #####
### TCP wrapper ##### wrapper ##### root ##### SPAWN 18 #####
# /etc/hosts.deny #####
```

```
ALL: ALL: SPAWN ( \
    echo -e "\n\
    TCP Wrappers\ : Connection refused\n\
    By\ : $(uname -n)\n\
    Process\ : %d (pid %p)\n\
    User\ : %u\n\
    Host\ : %c\n\
    Date\ : $(date)\n\
    " | /usr/bin/mail -s "Connection to %d blocked" root) &
```

```
##: ##### DoS #####
#####
```

#####

```
##### 99% #####
1% #####
```

¹⁷ On older Debian releases you might need to do this:

```
$ apt-cache showpkg libwrap0 | egrep '^[[:space:]]' | sort -u | \
    sed 's/,libwrap0$/;/s/^[[:space:]]\+//'
```

¹⁸ #####spawn ## #####

Debian GNU/Linux provides some tools to perform log analysis, most notably `swatch`,¹⁹ `logcheck` or `log-analysis` (all will need some customisation to remove unnecessary things from the report). It might also be useful, if the system is nearby, to have the system logs printed on a virtual console. This is useful since you can (from a distance) see if the system is behaving properly. Debian's `/etc/syslog.conf` comes with a commented default configuration; to enable it uncomment the lines and restart `syslogd` (`/etc/init.d/syslogd restart`):

```
daemon,mail.*;\
news.=crit;news.=err;news.=notice;\
*.=debug;*.=info;\
*.=notice;*.=warn          /dev/tty8
```

To colorize the logs, you could take a look at `colorize`, `ccze` or `glark`. There is a lot to log analysis that cannot be fully covered here, so a good information resource would be books should as <http://books.google.com/books?id=UyktqN6GnWEC>. In any case, even automated tools are no match for the best analysis tool: your brain.

Using and customizing logcheck

The `logcheck` package in Debian is divided into the three packages `logcheck` (the main program), `logcheck-database` (a database of regular expressions for the program) and `logtail` (prints loglines that have not yet been read). The Debian default (in `/etc/cron.d/logcheck`) is that `logcheck` is run every hour and after reboots.

```
logcheck #####
#####
##### Logcheck #####
##### 3 ## (workstation#server ### paranoid) #####
#####logcheck # Debian ##### logcheck ##### /etc/logcheck/
logcheck.conf ##### logcheck # Debian ##
#####: /etc/logcheck/hacking.d/
__packagename_# /etc/logcheck/violations.d/__packagename_# /etc/logcheck/
violations.ignore.d/__packagename_# /etc/logcheck/ignore.d.paranoid/
__packagename_# /etc/logcheck/ignore.d.server/__packagename_### /etc/
logcheck/ignore.d.workstation/__packagename_#####
##### /usr/share/doc/
logcheck/README.Debian #####
```

The best way to configure `logcheck` is to edit its main configuration file `/etc/logcheck/logcheck.conf` after installation. Change the default user (root) to whom reports should be mailed. You should set the `reportlevel` in there, too. `logcheck-database` has three report levels of increasing verbosity: `workstation`, `server`, `paranoid`. "server" being the default level, `paranoid` is only recommended for high-security machines running as few services as possible and `workstation` for relatively sheltered, non-critical machines. If you wish to add new log files just add them to `/etc/logcheck/logcheck.logfiles`. It is tuned for default `syslog` install.

Once this is done you might want to check the mails that are sent, for the first few days/weeks/months. If you find you are sent messages you do not wish to receive, just add the regular expressions (see `regex(7)` and `egrep(1)`) that correspond to these messages to the `/etc/logcheck/ignore.d.reportlevel/local`. Try to match the whole logline. Details on howto write rules are explained in `/usr/share/doc/logcheck-database/README.logcheck-database.gz`. It's an ongoing tuning process; once the messages that are sent are always relevant you can consider the

¹⁹ there's a very good article on it written by <http://www.spitzner.net/swatch.html>

tuning finished. Note that if **logcheck** does not find anything relevant in your system it will not mail you even if it does run (so you might get a mail only once a week, if you are lucky).

#####

```
Debian ##### syslog ##### (/etc/syslog.conf #) ##### ##
##### syslog.conf ##### #####
#####
```

```
##### (#####
#####) #####
```

```
root #####(snort #####) ##### root #####
##### (/etc/aliases #####)#root ##### (#####) #####
```

```
##### root ##### root #####
#####
```

```
FIXME: Debian ##### SNMP ##### (jfs)#
snmpraglogd#snmp ## snmpd ##
```

#####

A loghost is a host which collects syslog data remotely over the network. If one of your machines is cracked, the intruder is not able to cover the tracks, unless hacking the loghost as well. So, the loghost should be especially secure. Making a machine a loghost is simple. Just start the **syslogd** with

```
syslogd -r
```

and a new loghost is born. In order to do this permanently in Debian, edit `/etc/default/syslogd` and change the line

```
SYSLOGD=" "
```

to

```
SYSLOGD="-r"
```

```
##### /etc/syslog.conf #####:
```

```
facility.level @your_loghost
```

```
facility # level ##### (#####) #####
syslog.conf #####:
```

```
*.* @your_loghost
```

into your `syslog.conf`. Logging remotely as well as locally is the best solution (the attacker might presume to have covered his tracks after deleting the local log files). See the `syslog(3)`, `syslogd(8)` and `syslog.conf(5)` manpages for additional information.

#####

It is not only important to decide how alerts are used, but also who has read/modify access to the log files (if not using a remote loghost). Security alerts which the attacker can change or disable are not worth much in the event of an intrusion. Also, you have to take into account that log files might reveal quite a lot of information about your system to an intruder who has access to them.

```
##### /var/log/lastlog# /var/log/faillog
##### lastlog ##### faillog ## #####
##### 660 # chmod ##### UID # 0 #####adm###
#root#####
```

```
# find /var/log -type f -exec ls -l {} \; | cut -c 17-35 |sort -u
(see to what users do files in /var/log belong)
# find /var/log -type f -exec ls -l {} \; | cut -c 26-34 |sort -u
(see to what groups do files in /var/log belong)
# find /var/log -perm +004
(files which are readable by any user)
# find /var/log \! -group root \! -group adm -exec ls -ld {} \;
(files which belong to groups not root or adm)
```

To customize how log files are created you will probably have to customize the program that generates them. If the log file gets rotated, however, you can customize the behavior of creation and rotation.

#####

Debian GNU/Linux ##### Linux #####

- Linux Intrusion Detection [<http://www.lids.org>] provided in the kernel-patch-2.4-lids package. This kernel patch makes the process of hardening your Linux system easier by allowing you to restrict, hide and protect processes, even from root. It implements mandatory access control capabilities.
- Linux Trustees [<http://trustees.sourceforge.net/>], provided in package trustees. This patch adds a decent advanced permissions management system to your Linux kernel. Special objects (called trustees) are bound to every file or directory, and are stored in kernel memory, which allows fast lookup of all permissions.
- NSA Enhanced Linux (in package selinux). Backports of the SELinux-enabled packages are available at <https://salsa.debian.org/selinux-team>. More information available at SELinux in Debian Wiki page [<http://wiki.debian.org/SELinux>], at Manoj Srivastava's [<http://www.golden-gryphon.com/software/security/selinux.xhtml>] and Russell Cookers's [<http://www.coker.com.au/selinux/>] SELinux websites.
- The kernel patch <http://people.redhat.com/mingo/exec-shield> provided in the kernel-patch-exec-shield package. This patch provides protection against some buffer overflows (stack smashing attacks).
- The Grsecurity patch [<http://www.grsecurity.net/>], provided by the kernel-patch-2.4-grsecurity and kernel-patch-grsecurity2 packages²⁰ implements Mandatory Access Control through RBAC, provides

²⁰ Notice that this patch conflicts with patches already included in Debian's 2.4 kernel source package. You will need to use the stock vanilla kernel. You can do this with the following steps:

```
# apt-get install kernel-source-2.4.22 kernel-patch-debian-2.4.22
# tar xjf /usr/src/kernel-source-2.4.22.tar.bz2
```

buffer overflow protection through PaX, ACLs, network randomness (to make OS fingerprinting more difficult) and many more features [<http://www.grsecurity.net/features.php>].

- The kernel-patch-adamantix provides the patches developed for Adamantix [<http://www.adamantix.org/>], a Debian-based distribution. This kernel patch for the 2.4.x kernel releases introduces some security features such as a non-executable stack through the use of <http://pageexec.virtualave.net/> and mandatory access control based on <http://www.rsbac.org/>. Other features include: <http://www.vanheusden.com/Linux/sp/>, AES encrypted loop device, MPPE support and an IPSEC v2.6 backport.
- cryptoloop-source. This patches allows you to use the functions of the kernel crypto API to create encrypted filesystems using the loopback device.
- IPSEC kernel support (in package linux-patch-openswan). If you want to use the IPsec protocol with Linux, you need this patch. You can create VPNs with this quite easily, even to Windows machines, as IPsec is a common standard. IPsec capabilities have been added to the 2.5 development kernel, so this feature will be present by default in the future Linux Kernel 2.6. Homepage: <http://www.openswan.org>. *FIXME*: The latest 2.4 kernels provided in Debian include a backport of the IPSEC code from 2.5. Comment on this.

The following security kernel patches are only available for old kernel versions in woody and are deprecated:

- <http://acl.bestbits.at/> (ACLs) for Linux provided in the package kernel-patch-acl. This kernel patch adds access control lists, an advanced method for restricting access to files. It allows you to control fine-grain access to files and directory.
- The <http://www.openwall.com/linux/> linux kernel patch by Solar Designer, provided in the kernel-patch-2.2.18-openwall package. This is a useful set of kernel restrictions, like restricted links, FIFOs in `/tmp`, a restricted `/proc` file system, special file descriptor handling, non-executable user stack area and other features. Note: This package applies to the 2.2 release, no packages are available for the 2.4 release patches provided by Solar.
- kernel-patch-int. This patch also adds cryptographic capabilities to the Linux kernel, and was useful with Debian releases up to Potato. It doesn't work with Woody, and if you are using Sarge or a newer version, you should use a more recent kernel which includes these features already.

However, some patches have not been provided in Debian yet. If you feel that some of these should be included please ask for it at the <http://www.debian.org/devel/wnpp/>.

Protecting against buffer overflows

Buffer overflow is the name of a common attack to software²¹ which makes use of insufficient boundary checking (a programming error, most commonly in the C language) in order to execute machine code through program inputs. These attacks, against server software which listen to connections remotely and against local software which grant higher privileges to users (`setuid` or `setgid`) can result in the compromise of any given system.

There are mainly four methods to protect against buffer overflows:

```
# cd kernel-source-2.4.22
# /usr/src/kernel-patches/all/2.4.22/unpatch/debian
```

For more information see <http://bugs.debian.org/194225>, <http://bugs.debian.org/199519>, <http://bugs.debian.org/206458>, <http://bugs.debian.org/203759>, <http://bugs.debian.org/204424>, <http://bugs.debian.org/210762>, <http://bugs.debian.org/211213>, and the <http://lists.debian.org/debian-devel/2003/09/msg01133.html>

²¹ So common, in fact, that they have been the basis of 20% of the reported security vulnerabilities every year, as determined by <http://icat.nist.gov/icat.cfm?function=statistics>

- patch the kernel to prevent stack execution. You can use either: Exec-shield, OpenWall or PaX (included in the Grsecurity and Adamantix patches).
- fix the source code by using tools to find fragments of it that might introduce this vulnerability.
- recompile the source code to introduce proper checks that prevent overflows, using the <http://www.research.ibm.com/trl/projects/security/ssp/> patch for GCC (which is used by <http://www.adamantix.org>)

Debian GNU/Linux, as of the 3.0 release, provides software to introduce all of these methods except for the protection on source code compilation (but this has been requested in <http://bugs.debian.org/213994>).

Notice that even if Debian provided a compiler which featured stack/buffer overflow protection all packages would need to be recompiled in order to introduce this feature. This is, in fact, what the Adamantix distribution does (among other features). The effect of this new feature on the stability of software is yet to be determined (some programs or some processor architectures might break due to it).

In any case, be aware that even these workarounds might not prevent buffer overflows since there are ways to circumvent these, as described in phrack's magazine <http://packetstorm.linuxsecurity.com/mag/phrack/phrack58.tar.gz> or in CORE's Advisory <http://online.securityfocus.com/archive/1/269246>.

If you want to test out your buffer overflow protection once you have implemented it (regardless of the method) you might want to install the paxtest and run the tests it provides.

Kernel patch protection for buffer overflows

Kernel patches related to buffer overflows include the Openwall patch provides protection against buffer overflows in 2.2 linux kernels. For 2.4 or newer kernels, you need to use the Exec-shield implementation, or the PaX implementation (provided in the grsecurity patch, kernel-patch-2.4-grsecurity, and in the Adamantix patch, kernel-patch-adamantix). For more information on using these patches read the section #####.

Testing programs for overflows

The use of tools to detect buffer overflows requires, in any case, of programming experience in order to fix (and recompile) the code. Debian provides, for example: bfbtester (a buffer overflow tester that brute-forces binaries through command line and environment overflows). Other packages of interest would also be rats, pscan, flawfinder and splint.

#####

During normal system administration one usually needs to transfer files in and out from the installed system. Copying files in a secure manner from a host to another can be achieved by using the ssh server package. Another possibility is the use of ftpd-ssl, a ftp server which uses the *Secure Socket Layer* to encrypt the transmissions.

Any of these methods need special clients. Debian does provide client software, such as **scp** from the ssh package, which works like **rcp** but is encrypted completely, so the *bad guys* cannot even find out WHAT you copy. There is also a ftp-ssl package for the equivalent server. You can find clients for these software even for other operating systems (non-UNIX), **putty** and **winscp** provide secure copy implementations for any version of Microsoft's operating system.

Note that using **scp** provides access to the users to all the file system unless **chroot**'ed as described in #Chrooting ssh#. FTP access can be **chroot**'ed, probably easier depending on you chosen daemon, as

described in #FTP #####. If you are worried about users browsing your local files and want to have encrypted communication you can either use an ftp daemon with SSL support or combine clear-text ftp and a VPN setup (see #####).

#####

quota

```
## quota #####
```

```
2 ##### quota #####: ## quota ##### quota ##### quota ##### ##
##### quota ##### quota #####
```

```
quota #####:
```

- quota #####
- quota ##### quota # #####
- Use quotas on all user-writable areas, on /home as well as on /tmp.

Every partition or directory to which users have full write access should be quota enabled. Calculate and assign a workable quota size for those partitions and directories which combines usability and security.

```
#####quota ##### quota ##### #####
#####quota#####
```

```
##### quota ##### /etc/fstab ## defaults #####
defaults,usrquota ##### quota ##### usrquota # grpquota #####
#### ##### quota ##### quota.user ## quota.group ##### (##### /
home ##### touch /home/quota.user /home/quota.group #####)#
```

touch

```
/home/quota.user /home/quota.group
```

for a /home file system).

Restart **quota** by doing

```
/etc/init.d/quota stop;/etc/init.d/quota
start
```

. Now quota should be running, and quota sizes can be set.

Editing quotas for a specific user can be done by

```
edquota -u <user>
```

. Group quotas can be modified with

```
edquota -g <group>
```

. Then set the soft and hard quota and/or inode quotas as needed.

```
quota ##### quota ##### quota mini-howto (/usr/share/doc/HOWTO/en-html/
mini/Quota.html)#####
```

The ext2 filesystem specific attributes (chattr/lsattr)

In addition to the usual Unix permissions, the ext2 and ext3 filesystems offer a set of specific attributes that give you more control over the files on your system. Unlike the basic permissions, these attributes are not displayed by the usual `ls -l` command or changed using `chmod`, and you need two other utilities, `lsattr` and `chattr` (in package `e2fsprogs`) to manage them. Note that this means that these attributes will usually not be saved when you backup your system, so if you change any of them, it may be worth saving the successive `chattr` commands in a script so that you can set them again later if you have to restore a backup.

Among all available attributes, the two that are most important for increasing security are referenced by the letters 'i' and 'a', and they can only be set (or removed) by the superuser:

- The 'i' attribute ('immutable'): a file with this attribute can neither be modified nor deleted or renamed and no link can be created to it, even by the superuser.
- The 'a' attribute ('append'): this attribute has the same effect that the immutable attribute, except that you can still open the file in append mode. This means that you can still add more content to it but it is impossible to modify previous content. This attribute is especially useful for the log files stored in `/var/log/`, though you should consider that they get moved sometimes due to the log rotation scripts.

These attributes can also be set for directories, in which case everyone is denied the right to modify the contents of a directory list (e.g. rename or remove a file, ...). When applied to a directory, the append attribute only allows file creation.

It is easy to see how the 'a' attribute improves security, by giving to programs that are not running as the superuser the ability to add data to a file without modifying its previous content. On the other hand, the 'i' attribute seems less interesting: after all, the superuser can already use the basic Unix permissions to restrict access to a file, and an intruder that would get access to the superuser account could always use the `chattr` program to remove the attribute. Such an intruder may first be confused when noticing not being able to remove a file, but you should not assume blindness - after all, the intruder got into your system! Some manuals (including a previous version of this document) suggest to simply remove the `chattr` and `lsattr` programs from the system to increase security, but this kind of strategy, also known as "security by obscurity", is to be absolutely avoided, since it provides a false sense of security.

A secure way to solve this problem is to use the capabilities of the Linux kernel, as described in #####. The capability of interest here is called `CAP_LINUX_IMMUTABLE`: if you remove it from the capabilities bounding set (using for example the command `lcap CAP_LINUX_IMMUTABLE`) it won't be possible to change any 'a' or 'i' attribute on your system anymore, even by the superuser ! A complete strategy could be as follows:

- Set the attributes 'a' and 'i' on any file you want;
- Add the command `lcap CAP_LINUX_IMMUTABLE` (as well as `lcap CAP_SYS_MODULE`, as suggested in #####) to one of the startup scripts;
- Set the 'i' attribute on this script and other startup files, as well as on the `lcap` binary itself;
- Execute the above command manually (or reboot your system to make sure everything works as planned).

Now that the capability has been removed from the system, an intruder cannot change any attribute on the protected files, and thus cannot change or remove the files. If the machine is forced to reboot (which is the only way to restore the capabilities bounding set), it will easily be detected, and the capability will be removed again as soon as the system restarts anyway. The only way to change a protected file would

be to boot the system in single-user mode or using another bootdisk, two operations that require physical access to the machine !

#####

```
##### /bin/login #####? #####
#####?
```

```
##### md5sum ### md5sum # ##### (#####) (#####) ###
## ##### 2 ##### md5sum ##### (MD5 ##### 128 ##### 2 #####
##### md5sum ##### 3.4e3803 #####)##### ##### md5sum #####
#####
##### sXid# AIDE (Advanced Intrusion Detection
Environment)#TripWire (non-free##### GPL #####)# integrit ### samhain###
```

Common tools used for this are `sxid`, `aide` (Advanced Intrusion Detection Environment), `tripwire`, `integrit` and `samhain`. Installing `debsums` will also help you to check the file system integrity, by comparing the md5sums of every file against the md5sums used in the Debian package archive. But beware: those files can easily be changed by an attacker and not all packages provide md5sums listings for the binaries they provided. For more information please read `#Do periodic integrity checks#` and `#Taking a snapshot of the system#`.

You might want to use `locate` to index the whole filesystem, if so, consider the implications of that. The Debian `findutils` package contains `locate` which runs as user `nobody`, and so it only indexes files which are visible to everybody. However, if you change it's behaviour you will make all file locations visible to all users. If you want to index all the filesystem (not the bits that the user `nobody` can see) you can replace `locate` with the package `slocate`. `slocate` is labeled as a security enhanced version of GNU `locate`, but it actually provides additional file-locating functionality. When using `slocate`, the user only sees the actually accessible files and you can exclude any files or directories on the system. The `slocate` package runs its update process with higher privledges than `locate`, and indexes every file. Users are then able to quickly search for every file which they are able to see. `slocate` doesn't let them see new files; it filters the output based on your UID.

You might want to use `bsign` or `elfsign`. `elfsign` provides an utility to add a digital signature to an ELF binary and a second utility to verify that signature. The current implementation uses PKI to sign the checksum of the binary. The benefits of doing this are that it enables one to determine if a binary has been modified and who created it. `bsign` uses GPG, `elfsign` uses PKI (X.509) certificates (OpenSSL).

setuid

The Debian `checksecurity` package provides a `cron` job that runs daily in `/etc/cron.daily/checksecurity`²². This `cron` job will run the `/usr/sbin/checksecurity` script that will store information of this changes.

```
##### /var/log/setuid.changes ##### ##
### root ##### (/etc/checksecurity.conf ##) CHECKSECURITY_EMAIL ##root#####
##### checksecurity(8) #####
```

Securing network access

FIXME: More (Debian-specific) content needed.

²² In previous releases, `checksecurity` was integrated into `cron` and the file was `/etc/cron.daily/standard`

#####

Many features of the kernel can be modified while running by echoing something into the `/proc` file system or by using `sysctl`. By entering `/sbin/sysctl -A` you can see what you can configure and what the options are, and it can be modified running

```
/sbin/sysctl -w variable=value
```

(see `sysctl(8)`). Only in rare cases do you need to edit something here, but you can increase security that way as well. For example:

```
net/ipv4/icmp_echo_ignore_broadcasts = 1
```

This is a *Windows emulator* because it acts like Windows on broadcast ping if this option is set to 1. That is, ICMP echo requests sent to the broadcast address will be ignored. Otherwise, it does nothing.

If you want to prevent you system from answering ICMP echo requests, just enable this configuration option:

```
net/ipv4/icmp_echo_ignore_all = 1
```

```
##### (#####) #####
```

```
/proc/sys/net/ipv4/conf/all/log_martians = 1
```

For more information on what things can be done with `/proc/sys/net/ipv4/*` read `/usr/src/linux/Documentation/filesystems/proc.txt`. All the options are described thoroughly under `/usr/src/linux/Documentation/networking/ip-sysctl.txt`²³.

Configuring syncookies

This option is a double-edged sword. On the one hand it protects your system against syn packet flooding; on the other hand it violates defined standards (RFCs).

```
net/ipv4/tcp_syncookies = 1
```

If you want to change this option each time the kernel is working you need to change it in `/etc/network/options` by setting `syncookies=yes`. This will take effect when ever `/etc/init.d/networking` is run (which is typically done at boot time) while the following will have a one-time effect until the reboot:

```
echo 1 > /proc/sys/net/ipv4/tcp_syncookies
```

This option will only be available if the kernel is compiled with the `CONFIG_SYNCOOKIES`. All Debian kernels are compiled with this option builtin but you can verify it running:

```
$ sysctl -A |grep syncookies
```

²³ In Debian the `kernel-source-version` packages copy the sources to `/usr/src/kernel-source-version.tar.bz2`, just substitute `version` to whatever kernel version sources you have installed

```
net/ipv4/tcp_syncookies = 1
```

For more information on TCP syncookies read <http://cr.yp.to/syncookies.html>.

Securing the network on boot-time

When setting configuration options for the kernel networking you need configure it so that it's loaded every time the system is restarted. The following example enables many of the previous options as well as other useful options.

There are actually two ways to configure your network at boot time. You can configure `/etc/sysctl.conf` (see: `sysctl.conf(5)`) or introduce a script that is called when the interface is enabled. The first option will be applied to all interfaces, whileas the second option allows you to configure this on a per-interface basis.

An example of a `/etc/sysctl.conf` configuration that will secure some network options at the kernel level is shown below. Notice the comment in it, `/etc/network/options` might override some values if they contradict those in this file when the `/etc/init.d/networking` is run (which is later than `procps` on the startup sequence).

```
#
# /etc/sysctl.conf - Configuration file for setting system variables
# See sysctl.conf (5) for information. Also see the files under
# Documentation/sysctl/, Documentation/filesystems/proc.txt, and
# Documentation/networking/ip-sysctl.txt in the kernel sources
# (/usr/src/kernel-$version if you have a kernel-package installed)
# for more information of the values that can be defined here.

#
# Be warned that /etc/init.d/procps is executed to set the following
# variables. However, after that, /etc/init.d/networking sets some
# network options with builtin values. These values may be overridden
# using /etc/network/options.
#
#kernel.domainname = example.com

# Additional settings - adapted from the script contributed
# by Dariusz Puchala (see below)
# Ignore ICMP broadcasts
net/ipv4/icmp_echo_ignore_broadcasts = 1
#
# Ignore bogus ICMP errors
net/ipv4/icmp_ignore_bogus_error_responses = 1
#
# Do not accept ICMP redirects (prevent MITM attacks)
net/ipv4/conf/all/accept_redirects = 0
# _or_
# Accept ICMP redirects only for gateways listed in our default
# gateway list (enabled by default)
# net/ipv4/conf/all/secure_redirects = 1
#
# Do not send ICMP redirects (we are not a router)
net/ipv4/conf/all/send_redirects = 0
```



```
#
# Do not forward IP packets (we are not a router)
# Note: Make sure that /etc/network/options has 'ip_forward=no'
net/ipv4/conf/all/forwarding = 0
#
# Enable TCP Syn Cookies
# Note: Make sure that /etc/network/options has 'syncookies=yes'
net/ipv4/tcp_syncookies = 1
#
# Log Martian Packets
net/ipv4/conf/all/log_martians = 1
#
# Turn on Source Address Verification in all interfaces to
# prevent some spoofing attacks
# Note: Make sure that /etc/network/options has 'spoofprotect=yes'
net/ipv4/conf/all/rp_filter = 1
#
# Do not accept IP source route packets (we are not a router)
net/ipv4/conf/all/accept_source_route = 0
```

To use the script you need to first create the script, for example, in `/etc/network/interface-secure` (the name is given as an example) and call it from `/etc/network/interfaces` like this:

```
auto eth0
iface eth0 inet static
    address xxx.xxx.xxx.xxx
    netmask 255.255.255.xxx
    broadcast xxx.xxx.xxx.xxx
    gateway xxx.xxx.xxx.xxx
    pre-up /etc/network/interface-secure
```

In this example, before the interface `eth0` is enabled the script will be called to secure all network interfaces as shown below.

```
#!/bin/sh -e
# Script-name: /etc/network/interface-secure
#
# Modifies some default behavior in order to secure against
# some TCP/IP spoofing & attacks for all interfaces.
#
# Contributed by Dariusz Puchalak.
#
echo 1 > /proc/sys/net/ipv4/icmp_echo_ignore_broadcasts
# Broadcast echo protection enabled.
echo 0 > /proc/sys/net/ipv4/conf/all/forwarding
# IP forwarding disabled.
echo 1 > /proc/sys/net/ipv4/tcp_syncookies # TCP syn cookies protection enabled.
echo 1 > /proc/sys/net/ipv4/conf/all/log_martians # Log strange packets.
# (this includes spoofed packets, source routed packets, redirect packets)
# but be careful with this on heavy loaded web servers.
echo 1 > /proc/sys/net/ipv4/icmp_ignore_bogus_error_responses
# Bad error message protection enabled.
```

```
# IP spoofing protection.
echo 1 > /proc/sys/net/ipv4/conf/all/rp_filter

# Disable ICMP redirect acceptance.
echo 0 > /proc/sys/net/ipv4/conf/all/accept_redirects
echo 0 > /proc/sys/net/ipv4/conf/all/send_redirects

# Disable source routed packets.
echo 0 > /proc/sys/net/ipv4/conf/all/accept_source_route

exit 0
```

Notice that you can actually have per-interface scripts that will enable different network options for different interfaces (if you have more than one), just change the pre-up line to:

```
pre-up /etc/network/interface-secure $IFACE
```

And use a script which will only apply changes to a specific interface, not to all of the interfaces available. Notice that some networking options can only be enabled globally, however. A sample script is this one:

```
#!/bin/sh -e
# Script-name: /etc/network/interface-secure
#
# Modifies some default behavior in order to secure against
# some TCP/IP spoofing & attacks for a given interface.
#
# Contributed by Dariusz Puchalak.
#

IFACE=$1
if [ -z "$IFACE" ] ; then
    echo "$0: Must give an interface name as argument!"
    echo "Usage: $0 <interface>"
    exit 1
fi

if [ ! -e /proc/sys/net/ipv4/conf/$IFACE/ ]; then
    echo "$0: Interface $IFACE does not exist (cannot find /proc/sys/net/ipv4/conf/)"
    exit 1
fi

echo 0 > /proc/sys/net/ipv4/conf/$IFACE/forwarding # IP forwarding disabled.
echo 1 > /proc/sys/net/ipv4/conf/$IFACE/log_martians # Log strange packets.
# (this includes spoofed packets, source routed packets, redirect packets)
# but be careful with this on heavy loaded web servers.

# IP spoofing protection.
echo 1 > /proc/sys/net/ipv4/conf/$IFACE/rp_filter

# Disable ICMP redirect acceptance.
echo 0 > /proc/sys/net/ipv4/conf/$IFACE/accept_redirects
echo 0 > /proc/sys/net/ipv4/conf/$IFACE/send_redirects
```

#####

```
# Disable source routed packets.
echo 0 > /proc/sys/net/ipv4/conf/$IFACE/accept_source_route

exit 0
```

An alternative solution is to create an `init.d` script and have it run on bootup (using **update-rc.d** to create the appropriate `rc.d` links).

#####

```
#####
Debian 2.2 #### (## 2.2 ## ##### ipchains ##### Debian 3.0 ##### (#### 2.4) ##
#### (stateful) ##### iptables (netfilter) ##### Debian #####
##### (Debian 2.1 ##### 2.0.34 #####)#
```

```
#####Debian #####
#####kernel-source-X # #####make-kpkg # #####
##
```

```
Debian #####
```

Disabling weak-end hosts issues

Systems with more than one interface on different networks can have services configured so that they will bind only to a given IP address. This usually prevents access to services when requested through any other address. However, this does not mean (although it is a common misconception) that the service is bound to a given *hardware* address (interface card).²⁴

It seems, however, not to work with services bound to 127.0.0.1, you might need to write the tests using raw sockets.

This is not an ARP issue and it's not an RFC violation (it's called *weak end host* in RFC1122 [ftp://ftp.isi.edu/in-notes/rfc1122.txt], (in the section 3.3.4.2). Remember, IP addresses have nothing to do with physical interfaces.

On 2.2 (and previous) kernels this can be fixed with:

```
# echo 1 > /proc/sys/net/ipv4/conf/all/hidden
# echo 1 > /proc/sys/net/ipv4/conf/eth0/hidden
# echo 1 > /proc/sys/net/ipv4/conf/eth1/hidden
.....
```

On later kernels this can be fixed either with:

²⁴ To reproduce this (example provided by Felix von Leitner on the Bugtraq mailing list):

```
host a (eth0 connected to eth0 of host b):
ifconfig eth0 10.0.0.1
ifconfig eth1 23.0.0.1
tcpserver -RHl localhost 23.0.0.1 8000 echo fnord

host b:
ifconfig eth0 10.0.0.2
route add 23.0.0.1 gw 10.0.0.1
telnet 23.0.0.1 8000
```

- Iptables ###
- properly configured routing.²⁵
- kernel patching.²⁶

Along this text there will be many occasions in which it is shown how to configure some services (sshd server, apache, printer service...) in order to have them listening on any given address, the reader should take into account that, without the fixes given here, the fix would not prevent accesses from within the same (local) network.²⁷

FIXME: Comments on Bugtraq indicate there is a Linux specific method to bind to a given interface.

FIXME: Submit a bug against netbase so that the routing fix is standard behavior in Debian?

Protecting against ARP attacks

When you don't trust the other boxes on your LAN (which should always be the case, because it's the safest attitude) you should protect yourself from the various existing ARP attacks.

As you know the ARP protocol is used to link IP addresses to MAC addresses (see <ftp://ftp.isi.edu/in-notes/rfc826.txt> for all the details). Every time you send a packet to an IP address an ARP resolution is done (first by looking into the local ARP cache then if the IP isn't present in the cache by broadcasting an ARP query) to find the target's hardware address. All the ARP attacks aim to fool your box into thinking that box B's IP address is associated to the intruder's box's MAC address; Then every packet that you want to send to the IP associated to box B will be send to the intruder's box...

Those attacks (ARP cache poisoning, ARP spoofing...) allow the attacker to sniff the traffic even on switched networks, to easily hijack connections, to disconnect any host from the network... ARP attacks are powerful and simple to implement, and several tools exists, such as **arpspoof** from the dsniff package or <http://arpoison.sourceforge.net/>.

However, there is always a solution:

- Use a static ARP cache. You can set up "static" entries in your ARP cache with:

```
arp -s host_name hwdr_addr
```

By setting static entries for each important host in your network you ensure that nobody will create/modify a (fake) entry for these hosts (static entries don't expire and can't be modified) and spoofed ARP replies will be ignored.

²⁵ The fact that this behavior can be changed through routing was described by Matthew G. Marsh in the Bugtraq thread:

```
eth0 = 1.1.1.1/24
eth1 = 2.2.2.2/24

ip rule add from 1.1.1.1/32 dev lo table 1 prio 15000
ip rule add from 2.2.2.2/32 dev lo table 2 prio 16000
```

```
ip route add default dev eth0 table 1
ip route add default dev eth1 table 2
```

²⁶ There are some patches available for this behavior as described in Bugtraq's thread at <http://www.linuxvirtualserver.org/~julian/#hidden> and <http://www.fefe.de/linux-eth-forwarding.diff>.

²⁷ An attacker might have many problems pulling the access through after configuring the IP-address binding while not being on the same broadcast domain (same network) as the attacked host. If the attack goes through a router it might be quite difficult for the answers to return somewhere.

- Detect suspicious ARP traffic. You can use arpswatch, karpiski or more general IDS that can also detect suspicious ARP traffic (snort, <http://www.prelude-ids.org...>).
- Implement IP traffic filtering validating the MAC address.

Taking a snapshot of the system

Before putting the system into production system you could take a snapshot of the whole system. This snapshot could be used in the event of a compromise (see 11#*After the compromise (incident response)*). You should remake this upgrade whenever the system is upgraded, especially if you upgrade to a new Debian release.

For this you can use a writable removable-media that can be set up read-only, this could be a floppy disk (read protected after use), a CD on a CD-ROM unit (you could use a rewritable CD-ROM so you could even keep backups of md5sums in different dates), or a USB disk or MMC card (if your system can access those and they can be write protected).

The following script creates such a snapshot:

```
#!/bin/bash
/bin/mount /dev/fd0 /mnt/floppy
trap "/bin/umount /dev/fd0" 0 1 2 3 9 13 15
if [ ! -f /usr/bin/md5sum ] ; then
    echo "Cannot find md5sum. Aborting."
    exit 1
fi
/bin/cp /usr/bin/md5sum /mnt/floppy
echo "Calculating md5 database"
>/mnt/floppy/md5checksums.txt
for dir in /bin/ /sbin/ /usr/bin/ /usr/sbin/ /lib/ /usr/lib/
do
    find $dir -type f | xargs /usr/bin/md5sum >>/mnt/floppy/md5checksums-lib.txt
done
echo "post installation md5 database calculated"
if [ ! -f /usr/bin/sha1sum ] ; then
    echo "Cannot find sha1sum"
    echo "WARNING: Only md5 database will be stored"
else
    /bin/cp /usr/bin/sha1sum /mnt/floppy
    echo "Calculating SHA-1 database"
    >/mnt/floppy/sha1checksums.txt
    for dir in /bin/ /sbin/ /usr/bin/ /usr/sbin/ /lib/ /usr/lib/
    do
        find $dir -type f | xargs /usr/bin/sha1sum >>/mnt/floppy/sha1checksums-lib.txt
    done
    echo "post installation sha1 database calculated"
fi
exit 0
```

Note that the md5sum binary (and sha1sum, if available) is placed on the floppy drive so it can be used later on to check the binaries of the system (just in case it gets trojaned). However, if you want to make sure that you are running a legitimate binary, you might want to either compile a static copy of the md5sum binary and use that one (to prevent a trojaned libc library from interfering with the binary) or to use the

#####

snapshot of md5sums only from a clean environment such as a rescue CD-ROM or a Live-CD (to prevent a trojaned kernel from interfering). I cannot stress this enough: if you are on a compromised system you cannot trust its output, see 11#*After the compromise (incident response)*.

The snapshot does not include the files under `/var/lib/dpkg/info` which includes the MD5 hashes of installed packages (in files ending with `.md5sums`). You could copy this information along too, however you should notice:

- the md5sums files include the md5sum of all files provided by the Debian packages, not just system binaries. As a consequence, that database is bigger (5 Mb versus 600 Kb in a Debian GNU/Linux system with a graphical system and around 2.5 Gb of software installed) and will not fit in small removable media (like a single floppy disk, but would probably fit in a removable USB memory).
- not all Debian packages provide md5sums for the files installed since it is not (currently) mandated policy. Notice, however, that you can generate the md5sums for all packages using `debsums` after you've finished the system installation:

```
# debsums --generate=missing,keep
```

Once the snapshot is done you should make sure to set the medium read-only. You can then store it for backup or place it in the drive and use it to drive a **cron** check nightly comparing the original md5sums against those on the snapshot.

If you do not want to setup a manual check you can always use any of the integrity systems available that will do this and more, for more information please read #Do periodic integrity checks#.

#####

svgalib #####

```
##### SVGAlib #####zgv #####  
##root ##### SVGAlib #####
```

#5#

2 #####:

- ##### (#####) #####
- #####

(#####) #####
(#####) ##### linux vservers ####
#####

Regarding the services running from **inetd** (**telnet**, **ftp**, **finger**, **pop3**...) it is worth noting that **inetd** can be configured so that services only listen on a given interface (using `service@ip` syntax) but that's an undocumented feature. One of its substitutes, the **xinetd** meta-daemon includes a `bind` option just for this matter. See `ixnetd.conf(5)` manual page.

```
service nntp
{
    socket_type      = stream
    protocol        = tcp
    wait            = no
    user            = news
    group           = news
    server          = /usr/bin/env
    server_args     = POSTING_OK=1 PATH=/usr/sbin/:/usr/bin:/sbin:/bin
+ /usr/sbin/snntpd logger -p news.info
    bind            = 127.0.0.1
}

#####
```

ssh

```
## ssh ##### telnet ##### telnet ##### Ssh #
#####
##### apt-get install ssh #####
```

```
##### telnet ##### ssh ##### telnet # telnetd ##### ##
ssh ##### root #####su # sudo #####root #####
##### /etc/ssh ##### sshd_config # #####:
```

- ##### (### ssh ###)##### (### #####)#####
- ##### Root #####ssh ### root # ##### 2 #####root ##### SSH #####
- `Port 666` or `ListenAddress 192.168.0.1:666` Change the listen port, so the intruder cannot be completely sure whether a `sshd` daemon runs (be forewarned, this is security by obscurity).
- `PermitEmptyPasswords no` Empty passwords make a mockery of system security.
- `AllowUsers alex ref me@somewhere` Allow only certain users to have access via `ssh` to this machine. `user@host` can also be used to restrict a given user from accessing only at a given host.

- ##### ssh ##### #####AllowGroups # AllowUsers #####
#####DenyUsers## #DenyGroups#####
- #####ssh ##### ~/.ssh/authorized_keys #####
#####no#####
- Disable any form of authentication you do not really need, if you do not use, for example `RhostsRSAAuthentication`, `HostbasedAuthentication`, `KerberosAuthentication` or `RhostsAuthentication` you should disable them, even if they are already by default (see the manpage `sshd_config(5)` manual page).
- Protocol 2 Disable the protocol version 1, since it has some design flaws that make it easier to crack passwords. For more information read <http://earthops.net/ssh-timing.pdf> or the <http://xforce.iss.net/static/6449.php>.
- Banner `/etc/some_file` Add a banner (it will be retrieved from the file) to users connecting to the ssh server. In some countries sending a warning before access to a given system about unauthorized access or user monitoring should be added to have legal protection.

You can also restrict access to the ssh server using `pam_listfile` or `pam_wheel` in the PAM control file. For example, you could keep anyone not listed in `/etc/loginusers` away by adding this line to `/etc/pam.d/ssh`:

```
auth      required      pam_listfile.so sense=allow onerr=fail item=user file=/etc/

##### OpenSSH ##### SSH ##### 3 #####ssh1#ssh2
### OpenBSD ##### OpenSSH ###Ssh1 ##### ssh ##### (windows #
# #####)#Ssh2 ##### ssh1 #####OpenSSH # #ssh#
##### Debian #####
```

You can read more information on how to set up SSH with PAM support in the <http://lists.debian.org/debian-security/2001/11/msg00395.html>.

Chrooting ssh

Currently OpenSSH does not provide a way to chroot automatically users upon connection (the commercial version does provide this functionality). However there is a project to provide this functionality for OpenSSH too, see <http://chrootssh.sourceforge.net>, it is not currently packaged for Debian, though. You could use, however, the `pam_chroot` module as described in #####.

In `#Chroot` environment for `SSH#` you can find several options to make a chroot environment for SSH.

Ssh clients

If you are using an SSH client against the SSH server you must make sure that it supports the same protocols that are enforced on the server. For example, if you use the `mindterm` package, it only supports protocol version 1. However, the `sshd` server is, by default, configured to only accept version 2 (for security reasons).

Disallowing file transfers

If you do *not* want users to transfer files to and from the ssh server you need to restrict access to the **sftp-server** and the **scp** access. You can restrict **sftp-server** by configuring the proper `Subsystem` in the `/etc/ssh/sshd_config`.

You can also chroot users (using libpam-chroot so that, even if file transfer is allowed, they are limited to an environment which does not include any system files.

Restricting access to file transfer only

You might want to restrict access to users so that they can only do file transfers and cannot have interactive shells. In order to do this you can either:

- disallow users from login to the ssh server (as described above either through the configuration file or PAM configuration).
- give users a restricted shell such as sponly or rssh. These shells restrict the commands available to the users so that they are not provided any remote execution privileges.

Squid

Squid is one of the most popular proxy/cache server, and there are some security issues that should be taken into account. Squid's default configuration file denies all users requests. However the Debian package allows access from 'localhost', you just need to configure your browser properly. You should configure Squid to allow access to trusted users, hosts or networks defining an Access Control List on `/etc/squid/squid.conf`, see the https://web.archive.org/web/20061206052115/http://www.deckle.co.za/squid-users-guide/Main_Page for more information about defining ACLs rules. Notice that Debian provides a minimum configuration for Squid that will prevent anything, except from *localhost* to connect to your proxy server (which will run in the default port 3128). You will need to customize your `/etc/squid/squid.conf` as needed.

The recommended minimum configuration (provided with the package) is shown below:

```
acl all src 0.0.0.0/0.0.0.0
acl manager proto cache_object
acl localhost src 127.0.0.1/255.255.255.255
acl SSL_ports port 443 563
acl Safe_ports port 80          # http
acl Safe_ports port 21         # ftp
acl Safe_ports port 443 563    # https, snews
acl Safe_ports port 70         # gopher
acl Safe_ports port 210        # wais
acl Safe_ports port 1025-65535 # unregistered ports
acl Safe_ports port 280        # http-mgmt
acl Safe_ports port 488        # gss-http
acl Safe_ports port 591        # filemaker
acl Safe_ports port 777        # multiling http
acl Safe_ports port 901        # SWAT
acl purge method PURGE
acl CONNECT method CONNECT
(...)
# Only allow cachemgr access from localhost
http_access allow manager localhost
http_access deny manager
# Only allow purge requests from localhost
http_access allow purge localhost
http_access deny purge
```

#####

```
# Deny requests to unknown ports
http_access deny !Safe_ports
# Deny CONNECT to other than SSL ports
http_access deny CONNECT !SSL_ports
#
# INSERT YOUR OWN RULE(S) HERE TO ALLOW ACCESS FROM YOUR CLIENTS
#
http_access allow localhost
# And finally deny all other access to this proxy
http_access deny all
#Default:
# icp_access deny all
#
#Allow ICP queries from everyone
icp_access allow all
```

You should also configure Squid based on your system resources, including cache memory (option `cache_mem`), location of the cached files and the amount of space they will take up on disk (option `cache_dir`).

```
##### Squid ##### HTTP ##### SMTP #####
# #####Squid ##### 25 ##### 25 #####
Safe_ports #####
```

```
#####
##### Squid ##### Debian GNU/Linux #####
#### woody (Debian 3.0) #####:
```

- calamaris - Log analyzer for Squid or Oops proxy log files.
- modlogan - A modular logfile analyzer.
- sarg - Squid Analysis Report Generator.
- squidtailed - Squid log monitoring program.

When using Squid in Accelerator Mode it acts as a web server too. Turning on this option increases code complexity, making it less reliable. By default Squid is not configured to act as a web server, so you don't need to worry about this. Note that if you want to use this feature be sure that it is really necessary. To find more information about Accelerator Mode on Squid see the https://web.archive.org/web/20070104164802/http://www.deckle.co.za/squid-users-guide/Accelerator_Mode

FTP

```
### FTP # (sslwrap #####SSL # SSH #####) #####
##### ftp # ftp ##### chroot #####
##### chroot ##### proftpd.conf #####:
```

DefaultRoot ~

```
/etc/init.d/proftpd restart # proftpd #####
```

```
../.. #### Proftpd DoS ##### /etc/proftpd.conf #####
```

```
FTP ##### (#####) ### Debian #####
#####sftp (ssh #####)### ##### SSH #####: #
### http://www.chiark.greenend.org.uk/~sgtatham/putty/ # http://www.cygwin.com ###
```

However, if you still maintain the FTP server while making users access through SSH you might encounter a typical problem. Users accessing anonymous FTP servers inside SSH-secured systems might try to log in the *FTP server*. While the access will be refused, the password will nevertheless be sent through the net in clear form. To avoid that, ProFTPD developer TJ Saunders has created a patch that prevents users feeding the anonymous FTP server with valid SSH accounts. More information and patch available at: <http://www.castaglia.org/proftpd/#Patches>. This patch has been reported to Debian too, see <http://bugs.debian.org/145669>.

X Window System

```
#####X #####
(X ##### X #####X #####) ##### # (#####) ####
##### xhost + # ##### X #####
##### xhost +hostname #####
```

A much more secure solution, though, is to use ssh to tunnel X and encrypt the whole session. This is done automatically when you ssh to another machine. For this to work, you have to configure both the ssh client and the ssh server. On the ssh client, `ForwardX11` should be set to `yes` in `/etc/ssh/ssh_config`. On the ssh server, `X11Forwarding` should be set to `yes` in `/etc/ssh/sshd_config` and the package `xbase-clients` should be installed because the ssh server uses `/usr/X11R6/bin/xauth` (`/usr/bin/xauth` on Debian unstable) when setting up the pseudo X display. In times of SSH, you should drop the xhost based access control completely.

```
##### X ##### ##### tcp # 6000 #####: startx
-- -nolisten tcp
```

```
$ startx -- -nolisten tcp
```

```
##: ### Xfree 4.0 (Debian 3.0 ##### X #####) # ##### Xfree 3.3.6 ##### (#####
Debian 2.2 #####)#/etc/X11/xinit/xserverrc #####
```

```
#!/bin/sh
exec /usr/bin/X11/X -dpi 100 -nolisten tcp
```

If you are using XDM set `/etc/X11/xdm/Xservers` to: `:0 local /usr/bin/X11/X vt7 -dpi 100 -nolisten tcp`. If you are using Gdm make sure that the `DisallowTCP=true` option is set in the `/etc/gdm/gdm.conf` (which is the default in Debian). This will basically append `-nolisten tcp` to every X command line¹.

You can also set the default's system timeout for **xscreensaver** locks. Even if the user can override it, you should edit the `/etc/X11/app-defaults/XScreenSaver` configuration file and change the lock line:

```
*lock: False
```

(which is the default in Debian) to:

¹ Gdm will *not* append `-nolisten tcp` if it finds a `-query` or `-indirect` on the command line since the query wouldn't work.

*lock: True

FIXME: Add information on how to disable the screensavers which show the user desktop (which might have sensitive information).

X Window ##### <http://www.linuxdoc.org/HOWTO/XWindow-User-HOWTO.html> (/usr/share/doc/HOWTO/en-txt/XWindow-User-HOWTO.txt.gz) #####

FIXME: ##### XFree 3.3.6 ##### ##### debian-security #####

#####

(#####) #####XDMCP (X Display Manager Control Protocol) #####XDM ##### /etc/X11/xdm/xdm-config #####
#####

DisplayManager.requestPort: 0

For GDM there should be in your gdm.conf:

```
[xdmcp]
Enable=false
```

#####Debian ##### XDMCP #####

(lpd # lprng ###)

Imagine, you arrive at work, and the printer is spitting out endless amounts of paper because someone is DoSing your line printer daemon. Nasty, isn't it?

In any UNIX printing architecture, there has to be a way to get the client's data to the host's print server. In traditional **lpr** and **lp**, the client command copies or symlinks the data into the spool directory (which is why these programs are usually SUID or SGID).

DoS #####? ### #####

/etc/hosts.lpd #

#####lpr ##### 515 ##### (#####)
(lpr ##### IP #####)#

lpr ## Lprng ##### IP ##### (#####)
#####

/dev/lp0 #####
cups ## <http://pdq.sourceforge.net/>

In cups, the print data is transferred to the server via the HTTP protocol. This means the client program doesn't need any special privileges, but does require that the server is listening on a port somewhere.

###cups # /etc/cups/cupsd.conf #####

Listen 127.0.0.1:631

There are many other security options like allowing or denying networks and hosts in this config file. However, if you do not need them you might be better off just limiting the listening port. **Cups** also serves documentation through the HTTP port, if you do not want to disclose potential useful information to outside attackers (and the port is open) add also:

```
<Location />
  Order Deny,Allow
  Deny From All
  Allow From 127.0.0.1
</Location>
```

This configuration file can be modified to add some more features including SSL/TLS certificates and crypto. The manuals are available at <http://localhost:631/> or at <http://cups.org>.

FIXME: Add more content (the article on <http://www.rootprompt.org> provides some very interesting views).

FIXME: PDG # Debian #####

FIXME: Farmer/Wietse ##### ## Debian #####

Securing the mail service

```
##### root #####
#####
```

If you have **exim** you do not need the daemon to be working in order to do this since the standard **cron** job flushes the mail queue. See ##### on how to do this.

Configuring a Nullmailer

You might want to have a local mailer daemon so that it can relay the mails sent locally to another system. This is common when you have to administer a number of systems and do not want to connect to each of them to read the mail sent locally. Just as all logging of each individual system can be centralized by using a central syslog server, mail can be sent to a central mailserver.

Such a *relay-only* system should be configured properly for this. The daemon could, as well, be configured to only listen on the loopback address.

The following configuration steps only need to be taken to configure the **exim** package in the Debian 3.0 release. If you are using a later release (such as 3.1 which uses **exim4**) the installation system has been improved so that if the mail transport agent is configured to only deliver local mail it will automatically only allow connections from the local host and will not permit remote connections.

In a Debian 3.0 system using **exim**, you will have to remove the SMTP daemon from **inetd**:

```
$ update-inetd --disable smtp
```

```
### loopback #####
#####exim (##### MTA) ##### /etc/exim.conf
#####:
```

```

local_interfaces = "127.0.0.1"

##### (inetd # exim) ##### exim # 127.0.0.1:25 ##### inetd ####
##### ##### exim ##### inetd #####

postfix ##### /etc/postfix/main.conf #####:

inet_interfaces = localhost

##### tcp wrapper # ##### ##
#####inetd ## ##### /etc/hosts.allow # /etc/
hosts.deny ##### tcp wrapper #####
#####

```

In any case, to reject mail relay attempts at the SMTP level, you can change `/etc/exim/exim.conf` to include:

```
receiver_verify = true
```

Even if your mail server will not relay the message, this kind of configuration is needed for the relay tester at <http://www.abuse.net/relay.html> to determine that your server is *not* relay capable.

If you want a relay-only setup, however, you can consider changing the mailer daemon to programs that can *only* be configured to forward the mail to a remote mail server. Debian provides currently both `ssmtp` and `nullmailer` for this purpose. In any case, you can evaluate for yourself any of the mail transport agents² provided by Debian and see which one suits best to the system's purposes.

Providing secure access to mailboxes

If you want to give remote access to mailboxes there are a number of POP3 and IMAP daemons available.³ However, if you provide IMAP access note that it is a general file access protocol, it can become the equivalent of a shell access because users might be able to retrieve any file that they can through it.

Try, for example, to configure as your inbox path `{server.com}/etc/passwd` if it succeeds your IMAP daemon is not properly configured to prevent this kind of access.

Of the IMAP servers in Debian the **cyrus** server (in the `cyrus-imapd` package) gets around this by having all access to a database in a restricted part of the file system. Also, **uw-imapd** (either install the `uw-imapd` or better, if your IMAP clients support it, `uw-imapd-ssl`) can be configured to chroot the users mail directory but this is not enabled by default. The documentation provided gives more information on how to configure it.

Also, you might want to run an IMAP server that does not need valid users to be created on the local system (which would grant shell access too), `courier-imap` (for IMAP) and `courier-pop`, `teapop` (for POP3) and

² To retrieve the list of mailer daemons available in Debian try:

```
$ apt-cache search mail-transport-agent
```

The list will not include **qmail**, which is distributed only as source code in the `qmail-src` package.

³ A list of servers/daemons which support these protocols in Debian can be retrieved with:

```
$ apt-cache search pop3-server
$ apt-cache search imap-server
```

cyrus-imapd (for both POP3 and IMAP) provide servers with authentication methods beside the local user accounts. **cyrus** can use any authentication method that can be configured through PAM while **teapop** might use databases (such as postgresql and mysql) for user authentication.

FIXME: Check: uw-imapd might be configured with user authentication through PAM too.

#####

```
##### POP3 # IMAP #####
##### SSL (Secure Sockets Layer) #####
##POP ## IMAP ##### ssh ##### fetchmailrc
#####:
```

```
poll my-imap-mailserver.org via "localhost"
  with proto IMAP port 1236
    user "ref" there with password "hackme" is alex here warnings 3600
    folders
      .Mail/debian
    preconnect 'ssh -f -P -C -L 1236:my-imap-mailserver.org:143 -l ref
      my-imap-mailserver.org sleep 15 </dev/null > /dev/null'
```

```
preconnect ##### ssh ##### localhost # 1236 ##### IMAP ##
##### ssl ##### fetchmail # #####
```

```
POP # IMAP ##### apt-get install stunnel #####
###:
```

```
stunnel -p /etc/ssl/certs/stunnel.pem -d pop3s -l /usr/sbin/popd
##### (-l) ##### (-d) ##### ssl cert (-p) #####
```

BIND

Domain #####:

- ##### (zone transfers #####) #####
- ##### # chroot #####

Bind configuration to avoid misuse

```
##### DNS #####
#####: allow-transfer#allow-query# allow-recursive#### version ##### (#####
#####) ##### bind-doc #####
##### /usr/share/doc/bind/html/index.html #####
```

```
##### (##### IP # 192.168.1.2 ## ###) ##### (#####)###
##### DNS ##### /etc/bind/named.conf ###
##### DNS ### #####:
```

```

options {
    allow-query { 192.168.1/24; } ;
    allow-transfer { none; } ;
    allow-recursion { 192.168.1/24; } ;
    listen-on { 192.168.1.2; } ;
    forward { only; } ;
    forwarders { A.B.C.D; } ;
};

listen-on ##### DNS #####
##### (### NAT #####)#####
##listen-on ##### DNS #####
##### (#####)##### DNS ##### 127.0.0.1 ###
#####

chaos #### version.bind ##### bind #####bind ##### ##
#####version.bind #####
#####version #####:

options {
    ... various options here ...
    version "Not available.";
};

version.bind #####

```

A sample named.conf configuration file might be the following:

```

acl internal {
    127.0.0.1/32;           // localhost
    10.0.0.0/8;            // internal
    aa.bb.cc.dd;           // eth0 IP
};

acl friendly {
    ee.ff.gg.hh;           // slave DNS
    aa.bb.cc.dd;           // eth0 IP
    127.0.0.1/32;         // localhost
    10.0.0.0/8;           // internal
};

options {
    directory "/var/cache/bind";
    allow-query { internal; };
    allow-recursion { internal; };
    allow-transfer { none; };
};

// From here to the mysite.bogus zone
// is basically unmodified from the debian default
logging {
    category lame-servers { null; };
    category cname { null; };
};

```



```

zone "." {
    type hint;
    file "/etc/bind/db.root";
};

zone "localhost" {
    type master;
    file "/etc/bind/db.local";
};

zone "127.in-addr.arpa" {
    type master;
    file "/etc/bind/db.127";
};

zone "0.in-addr.arpa" {
    type master;
    file "/etc/bind/db.0";
};

zone "255.in-addr.arpa" {
    type master;
    file "/etc/bind/db.255";
};

// zones I added myself
zone "mysite.bogus" {
    type master;
    file "/etc/bind/named.mysite";
    allow-query { any; };
    allow-transfer { friendly; };
};

```

Please (again) check the Bug Tracking System regarding Bind, specifically <http://bugs.debian.org/94760>. Feel free to contribute to the bug report if you think you can add useful information.

Changing BIND's user

```

BIND ##### root ##### BIND # #####BIND #####
# #####PCMCIA ##### named #####
README.Debian (/usr/share/doc/bind/README.Debian) # #####BIND #####
#####

```

Notice, in any case, that this only applies to BIND version 8. In the Debian packages for BIND version 9 (since the 9.2.1-5 version, available since *sarge*) the *bind* user is created and used by setting the `OPTIONS` variable in `/etc/default/bind9`. If you are using BIND version 9 and your name server daemon is not running as the *bind* user verify the settings on that file.

```

BIND ##### (root ##### nobody ###
nogroup #####)##### named #####

```

```
addgroup named
```

```
adduser --system --home /home/named --no-create-home --ingroup named \
--disabled-password --disabled-login named
```

Notice that the user named will be quite restricted. If you want, for whatever reason, to have a less restrictive setup use:

```
adduser --system --ingroup named named
```

```
##### /etc/init.d/bind #####
```

```
start-stop-daemon --start
```

to⁴

```
start-stop-daemon --start --quiet --exec /usr/sbin/named -- -g named -u named
```

Or you can change (create it if it does not exist) the default configuration file (`/etc/default/bind` for BIND version 8) and introduce the following:

```
OPTIONS="-u named -g named"
```

Change the permissions of files that are used by Bind, including `/etc/bind/rndc.key`:

```
-rw-r----- 1 root    named          77 Jan  4 01:02 rndc.key
```

and where bind creates its pidfile, using, for example, `/var/run/named` instead of `/var/run`:

```
$ mkdir /var/run/named
$ chown named.named /var/run/named
$ vi /etc/named.conf
[ ... update the configuration file to use this new location ...]
options { ...
        pid-file "/var/run/named/named.pid";
};
[ ... ]
```

Also, in order to avoid running anything as root, change the `reload` line in the `init.d` script by substituting:

```
reload)
        /usr/sbin/ndc reload
```

```
#####:
```

```
reload)
        $0 stop
        sleep 1
```

⁴ Note that depending on your bind version you might not have the `-g` option, most notably if you are using bind9 in sarge (9.2.4 version).

\$0 start

Note: Depending on your Debian version you might have to change the `restart` line too. This was fixed in Debian's bind version 1:8.3.1-2.

```
#####/etc/init.d/bind restart## bind ##### 2 ## syslog #####
```

```
Sep  4 15:11:08 nexus named[13439]: group = named
Sep  4 15:11:08 nexus named[13439]: user = named
```

Voilà! Your named now *does not* run as root. If you want to read more information on why BIND does not run as non-root user on Debian systems, please check the Bug Tracking System regarding Bind, specifically <http://bugs.debian.org/50013> and <http://bugs.debian.org/132582>, <http://bugs.debian.org/53550>, <http://bugs.debian.org/52745>, and <http://bugs.debian.org/128129>. Feel free to contribute to the bug reports if you think you can add useful information.

Chrooting the name server

To achieve maximum BIND security, now build a chroot jail (see ##### chroot ### suid #####) around your daemon. There is an easy way to do this: the `-t` option (see the `named(8)` manual page or page 100 of <http://www.nominum.com/content/documents/bind9arm.pdf>). This will make Bind chroot itself into the given directory without you needing to set up a chroot jail and worry about dynamic libraries. The only files that need to be in the chroot jail are:

```
dev/null
etc/bind/      - should hold named.conf and all the server zones
sbin/named-xfer - if you do name transfers
var/run/named/ - should hold the PID and the name server cache (if
                any) this directory needs to be writable by named user
var/log/named  - if you set up logging to a file, needs to be writable
                for the named user
dev/log        - syslogd should be listening here if named is configured to
                log through it
```

```
Bind ##### named ##### /etc/named/ #####
#####zone #####
####(##### zone transfer # #####) ### zone #####
```

```
####Bind # chroot ##### http://www.linuxdoc.org/HOWTO/Chroot-Bind-HOWTO.html (Bind 9 #
###) # http://www.linuxdoc.org/HOWTO/Chroot-Bind8-HOWTO.html (Bind 8 ####) #####
#### doc-linux-text (#####) ### doc-linux-html (html #) #####
```

If you are setting up a full chroot jail (i.e. not just `-t`) for Bind in Debian, make sure you have the following files in it⁵:

```
dev/log - syslogd should be listening here
dev/null
etc/bind/named.conf
etc/localtime
etc/group - with only a single line: "named:x:GID:"
etc/ld.so.cache - generated with ldconfig
```

⁵ This setup has not been tested for new release of Bind yet.

```

lib/ld-2.3.6.so
lib/libc-2.3.6.so
lib/ld-linux.so.2 - symlinked to ld-2.3.6.so
lib/libc.so.6 - symlinked to libc-2.3.6.so
sbin/ldconfig - may be deleted after setting up the chroot
sbin/named-xfer - if you do name transfers
var/run/

```

And modify also **syslogd** listen on `$/CHROOT/dev/log` so the named server can write syslog entries into the local system log.

If you want to avoid problems with dynamic libraries, you can compile bind statically. You can use **apt-get** for this, with the `source` option. It can even download the packages you need to properly compile it. You would need to do something similar to:

```

$ apt-get source bind
# apt-get build-dep bind
$ cd bind-8.2.5-2
  (edit src/port/linux/Makefile so CFLAGS includes the '-static'
   option)
$ dpkg-buildpackage -rfakeroot -uc -us
$ cd ..
# dpkg -i bind-8.2.5-2*deb

```

After installation, you will need to move around the files to the chroot jail⁶ you can keep the `init.d` scripts in `/etc/init.d` so that the system will automatically start the name server, but edit them to add `--chroot /location_of_chroot` in the calls to **start-stop-daemon** in those scripts or use the `-t` option for BIND by setting it in the `OPTIONS` argument at the `/etc/default/bind` (for version 8) or `/etc/default/bind9` (for version 9) configuration file.

For more information on how to set up chroots see ##### `chroot` ### `suid` #####.

FIXME: Merge info from <http://people.debian.org/~pzn/howto/chroot-bind.sh.txt>, <http://www.cryptio.net/~ferlatte/config/> (Debian-specific), <http://web.archive.org/web/20021216104548/http://www.psionic.com/papers/whitep01.html> and <http://csrc.nist.gov/fasp/FASPDocs/NISTSecuringDNS.htm>.

Apache

FIXME: Add content: modules provided with the normal Apache installation (under `/usr/lib/apache/X.X/mod_*`) and modules that can be installed separately in `libapache-mod-XXX` packages.

```

##### (#####doc-central ##### .....)#
Apache ##### /etc/apache/http.conf # Listen ### BindAddress
#####

```

Listen #####:

```
Listen 127.0.0.1:80
```

BindAddress #####:

⁶ Unless you use the `instdir` option when calling **dpkg** but then the chroot jail might be a little more complex.

#####

```
BindAddress 127.0.0.1
```

```
### /etc/init.d/apache restart # apache ##### ### apache # loopback #####  
#####
```

```
#####Apache ##### dhtpdd ##### Debian #####  
#####
```

```
http://httpd.apache.org/docs/misc/security_tips.html # Apache #####  
##### (Debian ##### apache-doc #####)###
```

More information on further restricting Apache by setting up a chroot jail is provided in #Chroot environment for Apache#.

Disabling users from publishing web contents

The default Apache installation in Debian permits users to publish content under the \$HOME/public_html. This content can be retrieved remotely using a URL such as: http://your_apache_server/~user.

If you do not want to permit this you must change the /etc/apache/http.conf configuration file commenting out (in Apache 1.3) the following module:

```
LoadModule userdir_module /usr/lib/apache/1.3/mod_userdir.so
```

If you are using Apache 2.0 you must remove the file /etc/apache2/mods-enabled/userdir.load or restrict the default configuration by modifying /etc/apache2/mods-enabled/userdir.conf.

However, if the module was linked statically (you can list the modules that are compiled in running apache -l) you must add the following to the Apache configuration file:

```
Userdir disabled
```

An attacker might still do user enumeration, since the answer of the web server will be a *403 Permission Denied* and not a *404 Not available*. You can avoid this if you use the Rewrite module.

#####

Apache logfiles, since 1.3.22-1, are owned by user 'root' and group 'adm' with permissions 640. These permissions are changed after rotation. An intruder that accessed the system through the web server would not be able (without privilege escalation) to remove old log file entries.

Published web files

Apache files are located under /var/www. Just after installation the default file provides some information on the system (mainly that it's a Debian system running Apache). The default webpages are owned by user root and group root by default, while the Apache process runs as user www-data and group www-data. This should make attackers that compromise the system through the web server harder to deface the site. You should, of course, substitute the default web pages (which might provide information you do not want to show to outsiders) with your own.

finger

finger ##### Debian #### finger #####
 ### (apt-cache search fingerd #####):

- cfingerd - Configurable finger daemon
- efingerd - Another finger daemon for unix capable of fine-tuning your out put.
- ffingerd - a secure finger daemon
- fingerd - Remote user information server.
- BSD-like finger daemon with qmail support.

finger ##### ffingerd # #####inetd#xinetd ### tcpserver ##### finger #####
 #####: #####(tcp wrapper #####) ##### finger #####
 #####

chroot ### suid

chroot #####
 ## (#####)#####
 #####
 #####

Many services running as daemons could benefit from this sort of arrangement. The daemons that you install with your Debian distribution will not come, however, chrooted⁷ per default.

This includes: name servers (such as **bind**), web servers (such as **apache**), mail servers (such as **sendmail**) and ftp servers (such as **wu-ftp**). It is probably fair to say that the complexity of BIND is the reason why it has been exposed to a lot of attacks in recent years (see #BIND #####).

However, Debian does provide some software that can help set up **chroot** environments. See #Making chrooted environments automatically#.

Anyway, if you run any service on your system, you should consider running them as secure as possible. This includes: revoking root privileges, running in a restricted environment (such as a chroot jail) or replacing them with a more secure equivalent.

#####**chroot** #####
 ##### (#####)#####
 #####
 #####
 #####
 #####**chroot** #####

Making chrooted environments automatically

There are several programs to chroot automatically servers and services. Debian currently (accepted in May 2002) provides Wietse Venema's **chrootuid** in the chrootuid package, as well as compartment and makejail. These programs can be used to set up a restricted environment for executing any program (**chrootuid** enables you to even run it as a restricted user).

⁷ It does try to run them under *minimum priviledge* which includes running daemons with their own users instead of having them run as root.

Some of these tools can be used to set up the chroot environment easily. The **makejail** program for example, can create and update a chroot jail with short configuration files (it provides sample configuration files for **bind**, **apache**, **postgresql** and **mysql**). It attempts to guess and install into the jail all files required by the daemon using **strace**, **stat** and Debian's package dependencies. More information at <http://www.floc.net/makejail/>. **Jailer** is a similar tool which can be retrieved from <http://www.balabit.hu/downloads/jailer/> and is also available as a Debian package.

#####

FTP#Telnet#NIS#RPC ##### HOWTO #
telnet # ftp ##### ssh

telnet ## ssh ##### ftp#telnet#
pop#imap#http ##### ftp-ssl#telnet-ssl#pop-ssl#https ###
SSL

Unix ##### (Linux # ##### Unixes #####
#)#

NIS

#####NIS##### Network Information Service ##### #
#####

#####LDAP ##### LDAP
PAM ##### <http://www.linuxdoc.org/HOWTO/LDAP-HOWTO.html> (/usr/share/doc/HOWTO/en-txt/LDAP-HOWTO.txt.gz)

NIS ##### <http://www.linuxdoc.org/HOWTO/NIS-HOWTO.html> (/usr/share/doc/HOWTO/en-txt/NIS-HOWTO.txt.gz) # #####

FIXME (jfs): ### Debian #####

Securing RPC services

You should disable RPC if you do not need it.

Remote Procedure Call (RPC) is a protocol that programs can use to request services from other programs located on different computers. The **portmap** service controls RPC services by mapping RPC program numbers into DARPA protocol port numbers; it must be running in order to make RPC calls.

RPC-based services have had a bad record of security holes, although the portmapper itself hasn't (but still provides information to a remote attacker). Notice that some of the DDoS (distributed denial of service) attacks use RPC exploits to get into the system and act as a so called agent/handler.

You only need RPC if you are using an RPC-based service. The most common RPC-based services are NFS (Network File System) and NIS (Network Information System). See the previous section for more information about NIS. The File Alteration Monitor (FAM) provided by the package fam is also an RPC service, and thus depends on portmap.

NFS services are quite important in some networks. If that is the case for you, then you will need to find a balance of security and usability for your network (you can read more about NFS security in the <http://www.tldp.org/HOWTO/NFS-HOWTO.html> (/usr/share/doc/HOWTO/en-txt/NFS-HOWTO.txt.gz)).

RPC

```
portmap #####Debian 3.0 ##### portmap #####
#####
##### portmap # net-base ##
### (#####) #####
```

Notice that some desktop environments (notably, GNOME) use RPC services and need the portmapper for some of the file management features. If this is your case, you can limit the access to RPC services as described below.

Limiting access to RPC services

Unfortunately, in some cases removing RPC services from the system is not an option. Some local desktop services (notably SGI's fam) are RPC based and thus need a local portmapper. This means that under some situations, users installing a desktop environment (like GNOME) will install the portmapper too.

There are several ways to limit access to the portmapper and to RPC services:

- Block access to the ports used by these services with a local firewall (see #####).
- Block access to these services using tcp wrappers, since the portmapper (and some RPC services) are compiled with libwrap (see #tcpwrappers #####). This means that you can block access to them through the hosts.allow and hosts.deny tcp wrappers configuration.
- Since version 5-5, the portmap package can be configured to listen only on the loopback interface. To do this, modify /etc/default/portmap, uncomment the following line: #OPTIONS="-i 127.0.0.1" and restart the portmapper. This is sufficient to allow local RPC services to work while at the same time prevents remote systems from accessing them (see, however, #Disabling weak-end hosts issues#).

#####

The Debian GNU/Linux operating system has the built-in capabilities provided by the Linux kernel. If you install a recent Debian release (default kernel installed is 2.6) you will have **iptables** (netfilter) firewalling available⁸.

#####

```
#####
#####IP #####
#####
#####
##### (#####...) #####
#####
```

On the other hand, having firewall rules on the local system also prevents some bad things from happening. Even if the services provided are configured securely, a firewall can protect from misconfigurations or from fresh installed services that have not yet been properly configured. Also, a tight configuration will prevent trojans *calling home* from working unless the firewalling code is removed. Note that an intruder

⁸ Available since the kernel version 2.4 (which was the default kernel in Debian 3.0). Previous kernel versions (2.2, available in even older Debian releases) used **ipchains**. The main difference between **ipchains** and **iptables** is that the latter is based on *stateful packet inspection* which provides for more secure (and easier to build) filtering configurations. Older (and now unsupported) Debian distributions using the 2.0 kernel series needed the appropriate kernel patch.

does *not* need superuser access to install a trojan locally that could be remotely controlled (since binding on ports is allowed if they are not privileged ports and capabilities have not been removed).

Thus, a proper firewall setup would be one with a default deny policy, that is:

- incoming connections are allowed only to local services by allowed machines.
- outgoing connections are only allowed to services used by your system (DNS, web browsing, POP, email...)⁹
- the forward rule denies everything (unless you are protecting other systems, see below).
- all other incoming or outgoing connections are denied.

#####

A Debian firewall can also be installed in order to protect, with filtering rules, access to systems *behind* it, limiting their exposure to the Internet. A firewall can be configured to prevent access from systems outside of the local network to internal services (ports) that are not public. For example, on a mail server, only port 25 (where the mail service is being given) needs to be accessible from the outside. A firewall can be configured to, even if there are other network services besides the public ones running in the mail server, throw away packets (this is known as *filtering*) directed towards them.

You can even set up a Debian GNU/Linux box as a bridge firewall, i.e. a filtering firewall completely transparent to the network that lacks an IP address and thus cannot be attacked directly. Depending on the kernel you have installed, you might need to install the bridge firewall patch and then go to *802.1d Ethernet Bridging* when configuring the kernel and a new option *netfilter (firewalling) support*. See the *#Setting up a bridge firewall #* for more information on how to set this up in a Debian GNU/Linux system.

Setting up a firewall

The default Debian installation, unlike other Linux distributions, does not yet provide a way for the administrator to setup a firewall configuration throughout the default installation but you can install a number of firewall configuration packages (see #####).

Of course, the configuration of the firewall is always system and network dependant. An administrator must know beforehand what is the network layout and the systems to protect, the services that need to be accessed, and whether or not other network considerations (like NAT or routing) need to be taken into account. Be careful when configuring your firewall, as Laurence J. Lane says in the iptables package:

The tools can easily be misused, causing enormous amounts of grief by completely crippling network access to a system. It is not terribly uncommon for a remote system administrator to accidentally get locked out of a system hundreds or thousands of miles away. You can even manage to get locked out of a computer who's keyboard is under your own fingers. Please, use due caution.

Remember this: just installing the iptables (or the older firewalling code) does not give you any protection, just provides the software. In order to have a firewall you need to *configure* it!

Packet Filtering HOWTO ##### iptables ##### /usr/share/doc/iptables/html/

If you do not know much about firewalling you should start by reading the <http://www.tldp.org/HOWTO/Firewall-HOWTO.html>, install the doc-linux-text package if you want to read it offline. If you want to

⁹ Unlike personal firewalls in other operating systems, Debian GNU/Linux does not (yet) provide firewall generation interfaces that can make rules limiting them per process or user. However, the iptables code can be configured to do this (see the owner module in the iptables(8) manual page).

ask questions or need help setting up a firewall you can use the debian-firewall mailing list, see <http://lists.debian.org/debian-firewall>. Also see ##### for more (general) pointers on firewalls. Another good iptables tutorial is <http://iptables-tutorial.frozentux.net/iptables-tutorial.html>.

#####

Setting up manually a firewall can be complicated for novice (and sometimes even expert) administrators. However, the free software community has created a number of tools that can be used to easily configure a local firewall. Be forewarned that some of these tools are oriented more towards local-only protection (also known as *personal firewall*) and some are more versatile and can be used to configure complex rules to protect whole networks.

Debian #####:

- For desktop systems:
 - firestarter, a GNOME application oriented towards end-users that includes a wizard useful to quickly setup firewall rules. The application includes a GUI to be able to monitor when a firewall rule blocks traffic.
 - guarddog, a KDE based firewall configuration package oriented both to novice and advanced users.
 - knetfilter, a KDE GUI to manage firewall and NAT rules for iptables (alternative/competitor to the guarddog tool although slightly oriented towards advanced users).
 - fireflifer, an interactive tool to create iptables rules based on traffic seen on the system and applications. It has a server-client model so you have to install both the server (fireflifer-server) and one of the available clients, with one client available for different desktop environments: fireflifer-client-gtk (Gtk + client), fireflifer-client-kde (KDE client) and fireflifer-client-qt (QT client).
- For servers (headless) systems:
 - fwbuilder, an object oriented GUI which includes policy compilers for various firewall platforms including Linux' netfilter, BSD's pf (used in OpenBSD, NetBSD, FreeBSD and MacOS X) as well as router's access-lists. It is similar to enterprise firewall management software. Complete fwbuilder's functionality is also available from the command line.
 - shorewall, a firewall configuration tool which provides support for IPsec as well as limited support for traffic shaping as well as the definition of the firewall rules. Configuration is done through a simple set of files that are used to generate the iptables rules.
 - bastille, this hardening application is described in 6#Debian #####. One of the hardening steps that the administrator can configure is a definition of the allowed and disallowed network traffic that is used to generate a set of firewall rules that the system will execute on startup.

Lots of other iptables frontends come with Debian; an extensive list comparing the different packages in Debian is maintained at the <http://wiki.debian.org/Firewalls>.

Notice that some of the packages outlined previously will introduce firewalling scripts to be run when the system boots. Test them extensively before rebooting or you might find yourself locked from the box. If you mix different firewalling packages you can have undesired effects, usually, the firewalling script that runs last will be the one that configures the system (which might not be what you intend). Consult the package documentation and use either one of these setups.

As mentioned before, some programs, like firestarter, guarddog and knetfilter, are administration GUIs using either GNOME or KDE (last two). These applications are much more user-oriented (i.e. for home

users) than some of the other packages in the list which might be more administrator-oriented. Some of the programs mentioned before (like **bastille**) are focused at setting up firewall rules to protect the host they run in but are not necessarily designed to setup firewall rules for firewall hosts that protect a network (like **shorewall** or **fwbuilder**).

There is yet another type of firewall application: application proxies. If you are looking into setting up an enterprise-level firewall that does packet filtering and provides a number of transparent proxies that can do fine-grain traffic analysis you should consider using **zorp**, which provides this in a single program. You can also manually setup this type of firewall host using the proxies available in Debian for different services like for DNS using **bind** (properly configured), **dnsmasq**, **pdnsd** or **totd** for FTP using **frox** or **ftp-proxy**, for X11 using **xfwp**, for IMAP using **imapproxy**, for mail using **smtpd**, or for POP3 using **p3scan**. For other protocols you can either use a generic TCP proxy like **simpleproxy** or a generic SOCKS proxy like **dante-server**, **tsocks** or **socks4-server**. Typically, you will also use a web caching system (like **squid**) and a web filtering system (like **squidguard** or **dansguardian**).

Manual `init.d` configuration

Another possibility is to manually configure your firewall rules through an `init.d` script that will run all the **iptables** commands. Take the following steps:

- Review the script below and adapt it to your needs.
- Test the script and review the syslog messages to see which traffic is being dropped. If you are testing from the network you will want to either run the sample shell snippet to remove the firewall (if you don't type anything in 20 seconds) or you might want to comment out the *default deny* policy definitions (*-P INPUT DROP* and *-P OUTPUT DROP*) and check that the system will not drop any legitimate traffic.
- Move the script to `/etc/init.d/myfirewall`
- The below script takes advantage of Debian's use (since Squeeze) of dependency based boot sequencing. For more information see: <https://wiki.debian.org/LSBInitScripts/DependencyBasedBoot> and <https://wiki.debian.org/LSBInitScripts>. With the LSB headers set as they are in the script, `insserv` will automatically configure the system to start the firewall before any network is brought up, and stop the firewall after any network is brought down.

```
# insserv myfirewall
```

This is the sample firewall script:

```
#!/bin/sh
### BEGIN INIT INFO
# Provides:          myfirewall
# Required-Start:    $local_fs
# Required-Stop:     $local_fs
# Default-Start:     S
# Default-Stop:      0 6
# X-Start-Before:    $network
# X-Stop-After:      $network
# Short-Description: My custom firewall.
### END INIT INFO
#
# Simple example firewall configuration.
#
```

```
# Caveats:
# - This configuration applies to all network interfaces
#   if you want to restrict this to only a given interface use
#   '-i INTERFACE' in the iptables calls.
# - Remote access for TCP/UDP services is granted to any host,
#   you probably will want to restrict this using '--source'.
#
# chkconfig: 2345 9 91
# description: Activates/Deactivates the firewall at boot time
#
# You can test this script before applying with the following shell
# snippet, if you do not type anything in 10 seconds the firewall
# rules will be cleared.
#-----
# while true; do test=""; read -t 20 -p "OK? " test ; \
# [ -z "$test" ] && /etc/init.d/myfirewall clear ; done
#-----

PATH=/bin:/sbin:/usr/bin:/usr/sbin

# Services that the system will offer to the network
TCP_SERVICES="22" # SSH only
UDP_SERVICES=""
# Services the system will use from the network
REMOTE_TCP_SERVICES="80" # web browsing
REMOTE_UDP_SERVICES="53" # DNS
# Network that will be used for remote mgmt
# (if undefined, no rules will be setup)
# NETWORK_MGMT=192.168.0.0/24
# If you want to setup a management network (i.e. you've uncommented
# the above line) you will need to define the SSH port as well (i.e.
# uncomment the below line.) Remember to remove the SSH port from the
# TCP_SERVICES string.
# SSH_PORT="22"

if ! [ -x /sbin/iptables ]; then
    exit 0
fi

fw_start () {

    # Input traffic:
    /sbin/iptables -A INPUT -m state --state ESTABLISHED,RELATED -j ACCEPT
    # Services
    if [ -n "$TCP_SERVICES" ] ; then
    for PORT in $TCP_SERVICES; do
        /sbin/iptables -A INPUT -p tcp --dport ${PORT} -j ACCEPT
    done
    fi
    if [ -n "$UDP_SERVICES" ] ; then
    for PORT in $UDP_SERVICES; do
        /sbin/iptables -A INPUT -p udp --dport ${PORT} -j ACCEPT
    done
    fi
}
```

```
# Remote management
if [ -n "$NETWORK_MGMT" ] ; then
    /sbin/iptables -A INPUT -p tcp --src ${NETWORK_MGMT} --dport ${SSH_PORT} -j AC
fi
# Remote testing
/sbin/iptables -A INPUT -p icmp -j ACCEPT
/sbin/iptables -A INPUT -i lo -j ACCEPT
/sbin/iptables -P INPUT DROP
/sbin/iptables -A INPUT -j LOG

# Output:
/sbin/iptables -A OUTPUT -j ACCEPT -o lo
/sbin/iptables -A OUTPUT -m state --state ESTABLISHED,RELATED -j ACCEPT
# ICMP is permitted:
/sbin/iptables -A OUTPUT -p icmp -j ACCEPT
# So are security package updates:
# Note: You can hardcode the IP address here to prevent DNS spoofing
# and to setup the rules even if DNS does not work but then you
# will not "see" IP changes for this service:
/sbin/iptables -A OUTPUT -p tcp -d security.debian.org --dport 80 -j ACCEPT
# As well as the services we have defined:
if [ -n "$REMOTE_TCP_SERVICES" ] ; then
for PORT in $REMOTE_TCP_SERVICES; do
    /sbin/iptables -A OUTPUT -p tcp --dport ${PORT} -j ACCEPT
done
fi
if [ -n "$REMOTE_UDP_SERVICES" ] ; then
for PORT in $REMOTE_UDP_SERVICES; do
    /sbin/iptables -A OUTPUT -p udp --dport ${PORT} -j ACCEPT
done
fi
# All other connections are registered in syslog
/sbin/iptables -A OUTPUT -j LOG
/sbin/iptables -A OUTPUT -j REJECT
/sbin/iptables -P OUTPUT DROP
# Other network protections
# (some will only work with some kernel versions)
echo 1 > /proc/sys/net/ipv4/tcp_syncookies
echo 0 > /proc/sys/net/ipv4/ip_forward
echo 1 > /proc/sys/net/ipv4/icmp_echo_ignore_broadcasts
echo 1 > /proc/sys/net/ipv4/conf/all/log_martians
echo 1 > /proc/sys/net/ipv4/ip_always_defrag
echo 1 > /proc/sys/net/ipv4/icmp_ignore_bogus_error_responses
echo 1 > /proc/sys/net/ipv4/conf/all/rp_filter
echo 0 > /proc/sys/net/ipv4/conf/all/send_redirects
echo 0 > /proc/sys/net/ipv4/conf/all/accept_source_route

}

fw_stop () {
    /sbin/iptables -F
    /sbin/iptables -t nat -F
    /sbin/iptables -t mangle -F
    /sbin/iptables -P INPUT DROP
}
```

```

    /sbin/iptables -P FORWARD DROP
    /sbin/iptables -P OUTPUT ACCEPT
}

fw_clear () {
    /sbin/iptables -F
    /sbin/iptables -t nat -F
    /sbin/iptables -t mangle -F
    /sbin/iptables -P INPUT ACCEPT
    /sbin/iptables -P FORWARD ACCEPT
    /sbin/iptables -P OUTPUT ACCEPT
}

case "$1" in
    start|restart)
        echo -n "Starting firewall.."
        fw_stop
        fw_start
        echo "done."
        ;;
    stop)
        echo -n "Stopping firewall.."
        fw_stop
        echo "done."
        ;;
    clear)
        echo -n "Clearing firewall rules.."
        fw_clear
        echo "done."
        ;;
    *)
        echo "Usage: $0 {start|stop|restart|clear}"
        exit 1
        ;;
esac
exit 0

```

Instead of including all of the iptables rules in the init.d script you can use the **iptables-restore** program to restore the rules saved using **iptables-save**. In order to do this you need to setup your rules, save the ruleset under a static location (such as `/etc/default/firewall`)

Configuring firewall rules through ifup

You can use also the network configuration in `/etc/network/interfaces` to setup your firewall rules. For this you will need to:

- Create your firewalling ruleset for when the interface is active.
- Save your ruleset with **iptables-save** to a file in `/etc`, for example `/etc/iptables.up.rules`
- Configure `/etc/network/interfaces` to use the configured ruleset:

```
iface eth0 inet static
```

```
address x.x.x.x
[.. interface configuration ..]
pre-up iptables-restore < /etc/iptables.up.rules
```

You can optionally also setup a set of rules to be applied when the network interface is *down* creating a set of rules, saving it in `/etc/iptables.down.rules` and adding this directive to the interface configuration:

```
post-down iptables-restore < /etc/iptables.down.rules
```

For more advanced firewall configuration scripts through `ifupdown` you can use the hooks available to each interface as in the `*.d/` directories called with **run-parts** (see `run-parts(8)` manual page).

Testing your firewall configuration

Testing your firewall configuration is as easy, and as dangerous, as just running your firewall script (or enabling the configuration you defined in your firewall configuration application). However, if you are not careful enough and you are configuring your firewall remotely (like through an SSH connection) you could lock yourself out.

There are several ways to prevent this. One is running a script in a separate terminal that will remove the firewall configuration if you don't feed it input. An example of this is:

```
$ while true; do test=""; read -t 20 -p "OK? " test ; \
  [ -z "$test" ] && /etc/init.d/firewall clear ; done
```

Another one is to introduce a backdoor in your system through an alternate mechanism that allows you to either clear the firewall system or punch a hole in it if something goes awry. For this you can use `knockd` and configure it so that a certain port connection attempt sequence will clear the firewall (or add a temporary rule). Even though the packets will be dropped by the firewall, since **knockd** binds to the interface and *sees* you will be able to work around the problem.

Testing a firewall that is protecting an internal network is a different issue, you will want to look at some of the tools used for remote vulnerability assessment (see #####) to probe the network from the outside in (or from any other direction) to test the effectiveness of the firewall configuration.

#6# Debian

```
#####?#####  
#####  
#####  
#####  
#####  
woody (Debian 3.0) ##### 2 # #####harden #####  
##### bastille #####  
##### (##### yes/no # #####)#
```

Harden

The harden package tries to make it more easy to install and administer hosts that need good security. This package should be used by people that want some quick help to enhance the security of the system. It automatically installs some tools that should enhance security in some way: intrusion detection tools, security analysis tools, etc. Harden installs the following *virtual* packages (i.e. no contents, just dependencies or recommendations on others):

- harden-tools: ##### ## (#####...)
- harden-environment: ##### (#####)#
- harden-servers: #####
- harden-clients: #####
- harden-remoteaudit: ##### ##
- harden-nids: helps to install a network intrusion detection system.
- harden-surveillance: helps to install tools for monitoring of networks and services.

Useful packages which are not a dependence:

- harden-doc: #####
- harden-development: development tools for creating more secure programs.

```
##### (#####)##### harden #####  
##### harden ##### (####) ##### harden #####  
#####Debian # #####telnet ##### harden-servers # #  
#####apt #####:
```

```
# apt-get install telnetd  
The following packages will be REMOVED:  
  harden-servers  
The following NEW packages will be installed:  
  telnetd  
Do you want to continue? [Y/n]  
#####
```


Bastille Linux

```
http://www.bastille-linux.org ##### RedHat # Mandrake Linux ##### ##  
##Debian # (woody ##) ##### bastille ##### Debian GNU/Linux #####
```

```
Bastille ##### (Debian #####)#####  
#####:
```

- Answer questions step by step regarding the desired security of your system (using InteractiveBastille(8))
- ##### (#####) ##### (Lax#Moderate ### Paranoia # 3 #####) # #####
Bastille ##### (BastilleChooser(8) #####)
- Take a predefined configuration file (could be provided by Bastille or made by the administrator) and implement a given security policy (using AutomatedBastille(8)).

#7# Debian Security Infrastructure

The Debian Security Team

Debian has a Security Team, that handles security in the *stable* distribution. Handling security means they keep track of vulnerabilities that arise in software (watching forums such as Bugtraq, or vuln-dev) and determine if the *stable* distribution is affected by it.

Also, the Debian Security Team is the contact point for problems that are coordinated by upstream developers or organizations such as <http://www.cert.org> which might affect multiple vendors. That is, when problems are not Debian-specific. The contact point of the Security Team is <mailto:team@security.debian.org> which only the members of the security team read.

Sensitive information should be sent to the first address and, in some cases, should be encrypted with the Debian Security Contact key (as found in the Debian keyring).

Once a probable problem is received by the Security Team it will investigate if the *stable* distribution is affected and if it is, a fix is made for the source code base. This fix will sometimes include backporting the patch made upstream (which usually is some versions ahead of the one distributed by Debian). After testing of the fix is done, new packages are prepared and published in the <http://security.debian.org> site so they can be retrieved through **apt** (see #####). At the same time a *Debian Security Advisory* (DSA) is published on the web site and sent to public mailing lists including <http://lists.debian.org/debian-security-announce> and Bugtraq.

Some other frequently asked questions on the Debian Security Team can be found at #Debian security team #####.

Debian Security Advisories

Debian Security Advisories (DSAs) are made whenever a security vulnerability is discovered that affects a Debian package. These advisories, signed by one of the Security Team members, include information of the versions affected as well as the location of the updates. This information is:

- version number for the fix.
- problem type.
- whether it is remote or locally exploitable.
- short description of the package.
- description of the problem.
- description of the exploit.
- description of the fix.

DSAs are published both on <http://www.debian.org/> and in the <http://www.debian.org/security/>. Usually this does not happen until the website is rebuilt (every four hours) so they might not be present immediately. The preferred channel is the [debian-security-announce](mailto:debian-security-announce@lists.debian.org) mailing list.

Interested users can, however (and this is done in some Debian-related portals) use the RDF channel to download automatically the DSAs to their desktop. Some applications, such as **Evolution** (an email

client and personal information assistant) and **Multiticker** (a GNOME applet), can be used to retrieve the advisories automatically. The RDF channel is available at <http://www.debian.org/security/dsa.rdf>.

DSAs published on the website might be updated after being sent to the public-mailing lists. A common update is adding cross references to security vulnerability databases. Also, translations¹ of DSAs are not sent to the security mailing lists but are directly included in the website.

Vulnerability cross references

Debian provides a fully <http://www.debian.org/security/crossreferences> including all the references available for all the advisories published since 1998. This table is provided to complement the <http://cve.mitre.org/cve/refs/refmap/source-DEBIAN.html>.

You will notice that this table provides references to security databases such as <http://www.securityfocus.com/bid>, <http://www.cert.org/advisories/> and <http://www.kb.cert.org/vuls> as well as CVE names (see below). These references are provided for convenience use, but only CVE references are periodically reviewed and included.

Advantages of adding cross references to these vulnerability databases are:

- it makes it easier for Debian users to see and track which general (published) advisories have already been covered by Debian.
- system administrators can learn more about the vulnerability and its impact by following the cross references.
- this information can be used to cross-check output from vulnerability scanners that include references to CVE to remove false positives (see #Vulnerability assessment scanner X says my Debian system is vulnerable!#).

CVE compatibility

Debian Security Advisories were <http://www.debian.org/security/CVE-certificate.jpg>² in February 24, 2004.

Debian developers understand the need to provide accurate and up to date information of the security status of the Debian distribution, allowing users to manage the risk associated with new security vulnerabilities. CVE enables us to provide standardized references that allow users to develop a <https://cve.mitre.org/compatible/enterprise.html>.

The <http://cve.mitre.org> project is maintained by the MITRE Corporation and provides a list of standardized names for vulnerabilities and security exposures.

Debian believes that providing users with additional information related to security issues that affect the Debian distribution is extremely important. The inclusion of CVE names in advisories help users associate generic vulnerabilities with specific Debian updates, which reduces the time spent handling vulnerabilities that affect our users. Also, it eases the management of security in an environment where CVE-enabled security tools -such as network or host intrusion detection systems, or vulnerability assessment tools- are already deployed regardless of whether or not they are based on the Debian distribution.

Debian provides CVE names for all DSAs released since September 1998. All of the advisories can be retrieved on the Debian web site, and announcements related to new vulnerabilities include CVE names

¹ Translations are available in up to ten different languages.

² The full http://cve.mitre.org/compatible/phase2/SPI_Debian.html is available at CVE

if available at the time of their release. Advisories associated with a given CVE name can be searched directly through the Debian Security Tracker (see below).

In some cases you might not find a given CVE name in published advisories, for example because:

- No Debian products are affected by that vulnerability.
- There is not yet an advisory covering that vulnerability (the security issue might have been reported as a <http://bugs.debian.org/cgi-bin/pkgreport.cgi?tag=security> but a fix has not been tested and uploaded).
- An advisory was published before a CVE name was assigned to a given vulnerability (look for an update at the web site).

Security Tracker

The central database of what the Debian security teams know about vulnerabilities is the <http://security-tracker.debian.org>. It cross references packages, vulnerable and fixed versions for different suites, CVE names, Debian bug numbers, DSA's and miscellaneous notes. It can be searched, e.g. by CVE name to see which Debian packages are affected or fixed, or by package to show unresolved security issues. The only information missing from the tracker is confidential information that the security team received under embargo.

The package **debsecan** uses the information in the tracker to report to the administrator of a system which of the installed packages are vulnerable, and for which updates are available to fix security issues.

Debian Security Build Infrastructure

Since Debian is currently supported in a large number of architectures, administrators sometimes wonder if a given architecture might take more time to receive security updates than another. As a matter of fact, except for rare circumstances, updates are available to all architectures at the same time.

Packages in the security archive are autobuilt, just like the regular archive. However, security updates are a little more different than normal uploads sent by package maintainers since, in some cases, before being published they need to wait until they can be tested further, an advisory written, or need to wait for a week or more to avoid publicizing the flaw until all vendors have had a reasonable chance to fix it.

Thus, the security upload archive works with the following procedure:

- Someone finds a security problem.
- Someone fixes the problem, and makes an upload to security-master.debian.org's incoming (this *someone* is usually a Security Team member but can be also a package maintainer with an appropriate fix that has contacted the Security Team previously). The Changelog includes a *testing-security* or *stable-security* as target distribution.
- The upload gets checked and processed by a Debian system and moved into queue/accepted, and the buildds are notified. Files in here can be accessed by the security team and (somewhat indirectly) by the buildds.
- Security-enabled buildds pick up the source package (prioritized over normal builds), build it, and send the logs to the security team.
- The security team reply to the logs, and the newly built packages are uploaded to queue/unchecked, where they're processed by a Debian system, and moved into queue/accepted.

- When the security team find the source package acceptable (i.e., that it's been correctly built for all applicable architectures and that it fixes the security hole and doesn't introduce new problems of its own) they run a script which:
 - installs the package into the security archive.
 - updates the `Packages`, `Sources` and `Release` files of `security.debian.org` in the usual way (`dpkg-scanpackages`, `dpkg-scansources`, ...).
 - sets up a template advisory that the security team can finish off.
 - forwards the packages to the appropriate proposed-updates so that it can be included in the real archive as soon as possible.

This procedure, previously done by hand, was tested and put through during the freezing stage of Debian 3.0 woody (July 2002). Thanks to this infrastructure the Security Team was able to have updated packages ready for the apache and OpenSSH issues for all the supported (almost twenty) architectures in less than a day.

Developer's guide to security updates

Debian developers that need to coordinate with the security team on fixing in issue in their packages, can refer to the Developer's Reference section <http://www.debian.org/doc/manuals/developers-reference/pkgs.html#bug-security>.

Debian

This section could also be titled "how to upgrade/update safely your Debian GNU/Linux system" and it deserves its own section basically because it is an important part of the Security Infrastructure. Package signing is an important issue since it avoids tampering of packages distributed in mirrors and of downloads with man-in-the-middle attacks. Automatic software update is an important feature but it's also important to remove security threats that could help the distribution of trojans and the compromise of systems during updates³

FIXME: probably the Internet Explorer vulnerability handling. certificate chains has an impact on security updates on Microsoft Windows.

Debian does not provide signed packages but provides a mechanism available since Debian 4.0 (codename *etch*) to check for downloaded package's integrity⁴. For more information, see `#Secure apt#`.

This issue is better described in the http://www.cryptnet.net/fdp/crypto/strong_distro.html by V. Alex Brennen.

#####

The current scheme for package signature checking using `apt` is:

- Release ##### Packages.gz (##### md5sum ###) # md5sum #####
#####
- This signed Release file is downloaded by 'apt-get update' and stored along with `Packages.gz`.

³ Some operating systems have already been plagued with automatic-updates problems such as the <http://www.cunap.com/~hardingr/projects/osx/exploit.html>.

⁴ Older releases, such as Debian 3.1 *sarge* can use this feature by using backported versions of this package management tool

- ##### md5sum #####
 - ##### Release ##### (#####) #####apt # ##### Packages.gz ##### md5sum #####Packages.gz # #####(#####) ##### md5sum #####
 - ##### md5sum # Packages.gz ##### ##### Packages.gz #####
- MD5 ##### apt #####

This scheme is <http://lists.debian.org/debian-devel/2003/12/msg01986.html> in apt 0.6 and is available since the Debian 4.0 release. For more information see #Secure apt#. Packages that provide a front-end to apt need to be modified to adapt to this new feature; this is the case of **aptitude** which was <http://lists.debian.org/debian-devel/2005/03/msg02641.html> to adapt to this scheme. Front-ends currently known to work properly with this feature include **aptitude** and **synaptic**.

Debian #####: <http://www.debian.org/News/weekly/2001/8/>
<http://www.debian.org/News/weekly/2000/11/>

Secure apt

The apt 0.6 release, available since Debian 4.0 *etch* and later releases, includes *apt-secure* (also known as *secure apt*) which is a tool that will allow a system administrator to test the integrity of the packages downloaded through the above scheme. This release includes the tool **apt-key** for adding new keys to apt's keyring, which by default includes only the current Debian archive signing key.

These changes are based on the patch for **apt** (available in <http://bugs.debian.org/cgi-bin/bugreport.cgi?bug=203741>) which provides this implementation.

Secure apt works by checking the distribution through the `Release` file, as discussed in #Per distribution release check#. Typically, this process will be transparent to the administrator although you will need to intervene every year⁵ to add the new archive key when it is rotated, for more information on the steps an administrator needs to take a look at #Safely adding a key#.

This feature is still under development, if you believe you find bugs in it, please, make first sure you are using the latest version (as this package might change quite a bit before it is finally released) and, if running the latest version, submit a bug against the apt package.

You can find more information at <http://wiki.debian.org/SecureApt> and the official documentation: <http://www.enyo.de/fw/software/apt-secure/> and <https://web.archive.org/web/20070206063141/http://www.syntaxpolice.org/apt-secure/>.

Per distribution release check

This section describes how the distribution release check mechanism works, it was written by Joey Hess and is also available at the <http://wiki.debian.org/SecureApt>.

Basic concepts

Here are a few basic concepts that you'll need to understand for the rest of this section.

⁵ Until an automatic mechanism is developed.

A checksum is a method of taking a file and boiling it down to a reasonably short number that uniquely identifies the content of the file. This is a lot harder to do well than it might seem, and the most commonly used type of checksum, the MD5 sum, is in the process of being broken.

Public key cryptography is based on pairs of keys, a public key and a private key. The public key is given out to the world; the private key must be kept a secret. Anyone possessing the public key can encrypt a message so that it can only be read by someone possessing the private key. It's also possible to use a private key to sign a file, not encrypt it. If a private key is used to sign a file, then anyone who has the public key can check that the file was signed by that key. No one who doesn't have the private key can forge such a signature.

These keys are quite long numbers (1024 to 2048 digits or longer), and to make them easier to work with they have a key id, which is a shorter, 8 or 16 digit number that can be used to refer to them.

gpg is the tool used in secure apt to sign files and check their signatures.

apt-key is a program that is used to manage a keyring of gpg keys for secure apt. The keyring is kept in the file `/etc/apt/trusted.gpg` (not to be confused with the related but not very interesting `/etc/apt/trustdb.gpg`). **apt-key** can be used to show the keys in the keyring, and to add or remove a key.

Release checksums

A Debian archive contains a Release file, which is updated each time any of the packages in the archive change. Among other things, the Release file contains some MD5 sums of other files in the archive. An excerpt of an example Release file:

```
MD5Sum:
6b05b392f792ba5a436d590c129de21f          3453 Packages
1356479a23edda7a69f24eb8d6f4a14b          1131 Packages.gz
2a5167881adc9ad1a8864f281b1eb959          1715 Sources
88de3533bf6e054d1799f8e49b6aed8b          658 Sources.gz
```

The Release files also include SHA-1 checksums, which will be useful once MD5 sums become fully broken, however apt doesn't use them yet.

Now if we look inside a Packages file, we'll find more MD5 sums, one for each package listed in it. For example:

```
Package: uqm
Priority: optional
...
Filename: unstable/uqm_0.4.0-1_i386.deb
Size: 580558
MD5sum: 864ec6157c1eea88acfef44d0f34d219
```

These two checksums can be used to verify that you have downloaded a correct copy of the Packages file, with a md5sum that matches the one in the Release file. And when it downloads an individual package, it can also check its md5sum against the content of the Packages file. If apt fails at either of these steps, it will abort.

None of this is new in secure apt, but it does provide the foundation. Notice that so far there is one file that apt doesn't have a way to check: The Release file. Secure apt is all about making apt verify the Release file before it does anything else with it, and plugging this hole, so that there is a chain of verification from the package that you are going to install all the way back to the provider of the package.

Verification of the Release file

To verify the Release file, a gpg signature is added for the Release file. This is put in a file named Release.gpg that is shipped alongside the Release file. It looks something like this ⁶, although only gpg actually looks at its contents normally:

```
-----BEGIN PGP SIGNATURE-----
Version: GnuPG v1.4.1 (GNU/Linux)

iD8DBQBCqK01nukh8wJbxY8RASfHAJ9hu8oGNRA12MSmP5+z2RZb6FJ8kACfWvEx
UBGPVc7jbHHsg78EhMB1V/U=
=x6og
-----END PGP SIGNATURE-----
```

Check of Release.gpg by apt

Secure apt always downloads Release.gpg files when it's downloading Release files, and if it cannot download the Release.gpg, or if the signature is bad, it will complain, and will make note that the Packages files that the Release file points to, and all the packages listed therein, are from an untrusted source. Here's how it looks during an **apt-get update**:

```
W: GPG error: http://ftp.us.debian.org testing Release: The following signatures
  couldn't be verified because the public key is not available: NO_PUBKEY 010908312
```

Note that the second half of the long number is the key id of the key that apt doesn't know about, in this case that's 2D230C5F.

If you ignore that warning and try to install a package later, apt will warn again:

```
WARNING: The following packages cannot be authenticated!
  libglib-perl libgtk2-perl
Install these packages without verification [y/N]?
```

If you say Y here you have no way to know if the file you're getting is the package you're supposed to install, or if it's something else entirely that somebody that can intercept the communication against the server⁷ has arranged for you, containing a nasty suprise.

Note that you can disable these checks by running apt with --allow-unauthenticated.

It's also worth noting that newer versions of the Debian installer use the same signed Release file mechanism during their debootstrap of the Debian base system, before apt is available, and that the installer even uses this system to verify pieces of itself that it downloads from the net. Also, Debian does not currently sign the Release files on its CDs; apt can be configured to always trust packages from CDs so this is not a large problem.

How to tell apt what to trust

So the security of the whole system depends on there being a Release.gpg file, which signs a Release file, and of **apt** checking that signature using gpg. To check the signature, it has to know the public key of

⁶ Technically speaking, this is an ASCII-armored detached gpg signature.

⁷ Or has poisoned your DNS, or is spoofing the server, or has replaced the file in the mirror you are using, etc.

the person who signed the file. These keys are kept in apt's own keyring (`/etc/apt/trusted.gpg`), and managing the keys is where `secure apt` comes in.

By default, Debian systems come preconfigured with the Debian archive key in the keyring.

```
# apt-key list
/etc/apt/trusted.gpg
-----
pub 1024D/4F368D5D 2005-01-31 [expires: 2006-01-31]
uid Debian Archive Automatic Signing Key (2005) <ftpmaster@debian
```

Here 4F368D5D is the key id, and notice that this key was only valid for a one year period. Debian rotates these keys as a last line of defense against some sort of security breach breaking a key.

That will make **apt** trust the official Debian archive, but if you add some other apt repository to `/etc/apt/sources.list`, you'll also have to give **apt** its key if you want apt to trust it. Once you have the key and have verified it, it's a simple matter of running **apt-key add file** to add it. Getting the key and verifying it are the trickier parts.

Finding the key for a repository

The `debian-archive-keyring` package is used to distribute keys to **apt**. Upgrades to this package can add (or remove) gpg keys for the main Debian archive.

For other archives, there is not yet a standard location where you can find the key for a given apt repository. There's a rough standard of putting the key up on the web page for the repository or as a file in the repository itself, but no real standard, so you might have to hunt for it.

The Debian archive signing key is available at <https://ftp-master.debian.org/keys.html>.⁸

gpg itself has a standard way to distribute keys, using a keyserver that gpg can download a key from and add it to its keyring. For example:

```
$ gpg --keyserver pgpkeys.mit.edu --recv-key 2D230C5F
gpg: requesting key 2D230C5F from hkp server pgpkeys.mit.edu
gpg: key 2D230C5F: public key "Debian Archive Automatic Signing Key (2006) <ftpmaster@debian.org>" imported
gpg: Total number processed: 1
gpg: imported: 1
```

You can then export that key from your own keyring and feed it to **apt-key**:

```
$ gpg -a --export 2D230C5F | sudo apt-key add -
gpg: no ultimately trusted keys found
OK
```

The "gpg: no ultimately trusted keys found" warning means that gpg was not configured to ultimately trust a specific key. Trust settings are part of OpenPGPs Web-of-Trust which does not apply here. So there is no problem with this warning. In typical setups the user's own key is ultimately trusted.

⁸ "ziyi" is the name of the tool used for signing on the Debian servers, the name is based on the name of a http://en.wikipedia.org/wiki/Zhang_Ziyi.

Safely adding a key

By adding a key to apt's keyring, you're telling apt to trust everything signed by the key, and this lets you know for sure that apt won't install anything not signed by the person who possesses the private key. But if you're sufficiently paranoid, you can see that this just pushes things up a level, now instead of having to worry if a package, or a Release file is valid, you can worry about whether you've actually gotten the right key. Is the key file from <https://ftp-master.debian.org/keys.html> mentioned above really Debian's archive signing key, or has it been modified (or this document lies).

It's good to be paranoid in security, but verifying things from here is harder. **gpg** has the concept of a chain of trust, which can start at someone you're sure of, who signs someone's key, who signs some other key, etc., until you get to the archive key. If you're sufficiently paranoid you'll want to check that your archive key is signed by a key that you can trust, with a trust chain that goes back to someone you know personally. If you want to do this, visit a Debian conference or perhaps a local LUG for a key signing⁹.

If you can't afford this level of paranoia, do whatever feels appropriate to you when adding a new apt source and a new key. Maybe you'll want to mail the person providing the key and verify it, or maybe you're willing to take your chances with downloading it and assuming you got the real thing. The important thing is that by reducing the problem to what archive keys to trust, secure apt lets you be as careful and secure as it suits you to be.

Verifying key integrity

You can verify the fingerprint as well as the signatures on the key. Retrieving the fingerprint can be done for multiple sources, you can talk to Debian Developers on IRC, read the mailing list where the key change will be announced or any other additional means to verify the fingerprint. For example you can do this:

```
$ GET http://ftp-master.debian.org/ziyi_key_2006.asc | gpg --import
gpg: key 2D230C5F: public key "Debian Archive Automatic Signing Key (2006)
  <ftpmaster@debian.org>" imported
gpg: Total number processed: 1
gpg:          imported: 1
$ gpg --check-sigs --fingerprint 2D230C5F
pub 1024D/2D230C5F 2006-01-03 [expires: 2007-02-07]
    Key fingerprint = 0847 50FC 01A6 D388 A643 D869 0109 0831 2D23 0C5F
uid  Debian Archive Automatic Signing Key (2006) <ftpmaster@debian.org>
sig!3      2D230C5F 2006-01-03  Debian Archive Automatic Signing Key
              (2006) <ftpmaster@debian.org>
sig!       2A4E3EAA 2006-01-03  Anthony Towns <aj@azure.humbug.org.au>
sig!       4F368D5D 2006-01-03  Debian Archive Automatic Signing Key
              (2005) <ftpmaster@debian.org>
sig!       29982E5A 2006-01-04  Steve Langasek <vorlon@dodds.net>
sig!       FD6645AB 2006-01-04  Ryan Murray <rmurray@cyberhqz.com>
sig!       AB2A91F5 2006-01-04  James Troup <james@nocrew.org>
```

and then as in #Debian ##### check the trust path from your key (or a key you trust) to at least one of the keys used to sign the archive key. If you are sufficiently paranoid you will tell apt to trust the key only if you find an acceptable path:

⁹ Not all apt repository keys are signed at all by another key. Maybe the person setting up the repository doesn't have another key, or maybe they don't feel comfortable signing such a role key with their main key. For information on setting up a key for a repository see #Release check of non Debian sources#.

```
$ gpg --export -a 2D230C5F | sudo apt-key add -  
Ok
```

Note that the key is signed with the previous archive key, so theoretically you can just build on your previous trust.

Debian archive key yearly rotation

As mentioned above, the Debian archive signing key is changed each year, in January. Since secure apt is young, we don't have a great deal of experience with changing the key and there are still rough spots.

In January 2006, a new key for 2006 was made and the `Release` file began to be signed by it, but to try to avoid breaking systems that had the old 2005 key, the `Release` file was signed by that as well. The intent was that apt would accept one signature or the other depending on the key it had, but apt turned out to be buggy and refused to trust the file unless it had both keys and was able to check both signatures. This was fixed in apt version 0.6.43.1. There was also confusion about how the key was distributed to users who already had systems using secure apt; initially it was uploaded to the web site with no announcement and no real way to verify it and users were forced to download it by hand.

In January 2006, a new key for 2006 was made and the `Release` file began to be signed by it, but to try to avoid breaking systems that had the old 2005 key, the `Release` file was signed by that as well. In order to prevent confusion on the best distribution mechanism for users who already have systems using secure apt, the `debian-archive-keyring` package was introduced, which manages apt keyring updates.

Known release checking problems

One not so obvious problem is that if your clock is very far off, secure apt will not work. If it's set to a date in the past, such as 1999, apt will fail with an unhelpful message such as this:

```
W: GPG error: http://archive.progeny.com sid Release: Unknown error executing gpg
```

Although `apt-key list` will make the problem plain:

```
gpg: key 2D230C5F was created 192324901 seconds in the future (time warp or clock  
gpg: key 2D230C5F was created 192324901 seconds in the future (time warp or clock  
pub 1024D/2D230C5F 2006-01-03  
uid Debian Archive Automatic Signing Key (2006) <ftpmaster@debian
```

If it's set to a date too far in the future, apt will treat the keys as expired.

Another problem you may encounter if using testing or unstable is that if you have not run `apt-get update` lately and `apt-get install` a package, apt might complain that it cannot be authenticated (why does it do this?). `apt-get update` will fix this.

Manual per distribution release check

In case you want to add now the additional security checks and don't want or cannot run the latest apt version¹⁰ you can use the script below, provided by Anthony Towns. This script can automatically do some new security checks to allow the user to be sure that the software s/he's downloading matches the software Debian's distributing. This stops Debian developers from hacking into someone's system without

¹⁰ Either because you are using the stable, *sarge*, release or an older release or because you don't want to use the latest apt version, although we would really appreciate testing of it.

the accountability provided by uploading to the main archive, or mirrors mirroring something almost, but not quite like Debian, or mirrors providing out of date copies of unstable with known security problems.

```
##### apt-release-check #####
```

```
# apt-get update
# apt-check-sigs
(...results...)
# apt-get dist-upgrade
```

```
#####:
```

- get the keys the archive software uses to sign Release files from <https://ftp-master.debian.org/keys.html> and add them to `~/ .gnupg/trustedkeys.gpg` (which is what **gpgv** uses by default).

```
gpg --no-default-keyring --keyring trustedkeys.gpg --import ziyi_key_2006.asc
```

- #####dists##### /etc/apt/sources.list ## #####
- Debian ##### Release ##### Release ##### Sources ##### (##) #
#####
- #####

This is the example code for **apt-check-sigs**, the latest version can be retrieved from <http://people.debian.org/~ajt/apt-check-sigs>. This code is currently in beta, for more information read <http://lists.debian.org/debian-devel/2002/07/msg00421.html>.

```
#!/bin/bash
```

```
# Copyright (c) 2001 Anthony Towns <ajt@debian.org>
```

```
#
```

```
# This program is free software; you can redistribute it and/or modify
# it under the terms of the GNU General Public License as published by
# the Free Software Foundation; either version 2 of the License, or
# (at your option) any later version.
```

```
#
```

```
# This program is distributed in the hope that it will be useful,
# but WITHOUT ANY WARRANTY; without even the implied warranty of
# MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
# GNU General Public License for more details.
```

```
rm -rf /tmp/apt-release-check
mkdir /tmp/apt-release-check || exit 1
cd /tmp/apt-release-check
```

```
>OK
```

```
>MISSING
```

```
>NOCHECK
```

```
>BAD
```

```
arch=`dpkg --print-installation-architecture`
```

```

am_root () {
    [ `id -u` -eq 0 ]
}

get_md5sumsize () {
    cat "$1" | awk '/^MD5Sum:\/,\/^SHA1:\/' |
        MYARG="$2" perl -ne '@f = split /\s+\/; if ($f[3] eq $ENV{"MYARG"}) {
print "$f[1] $f[2]\n"; exit(0); }'
}

checkit () {
    local FILE="$1"
    local LOOKUP="$2"

    Y="`get_md5sumsize Release "$LOOKUP"`"
    Y="`echo "$Y" | sed 's/^ *\/;s/ */ /g`"

    if [ ! -e "/var/lib/apt/lists/$FILE" ]; then
        if [ "$Y" = "" ]; then
            # No file, but not needed anyway
            echo "OK"
            return
        fi
        echo "$FILE" >>MISSING
        echo "MISSING $Y"
        return
    fi
    if [ "$Y" = "" ]; then
        echo "$FILE" >>NOCHECK
        echo "NOCHECK"
        return
    fi
    X="`md5sum < /var/lib/apt/lists/$FILE | cut -d\ -f1` `wc -c < /var/lib
/var/lib/apt/lists/$FILE`"
    X="`echo "$X" | sed 's/^ *\/;s/ */ /g`"
    if [ "$X" != "$Y" ]; then
        echo "$FILE" >>BAD
        echo "BAD"
        return
    fi
    echo "$FILE" >>OK
    echo "OK"
}

echo
echo "Checking sources in /etc/apt/sources.list:"
echo "~~~~~"
echo
(echo "You should take care to ensure that the distributions you're downloading
"
echo "are the ones you think you are downloading, and that they are as up to"
echo "date as you would expect (testing and unstable should be no more than"
echo "two or three days out of date, stable-updates no more than a few weeks"

```

```

echo "or a month).".
) | fmt
echo

cat /etc/apt/sources.list |
sed 's/^ *//' | grep '^[^#]' |
while read ty url dist comps; do
    if [ "${url%:*}" = "http" -o "${url%:*}" = "ftp" ]; then
        baseurl="${url#*://}"
    else
        continue
    fi

    echo "Source: ${ty} ${url} ${dist} ${comps}"

    rm -f Release Release.gpg
    lynx -reload -dump "${url}/dists/${dist}/Release" >/dev/null 2>&1
    wget -q -O Release "${url}/dists/${dist}/Release"

    if ! grep -q '^' Release; then
        echo " * NO TOP-LEVEL Release FILE"
        >Release
    else
        origline=`sed -n 's/^Origin: */p' Release | head -1`
        lablline=`sed -n 's/^Label: */p' Release | head -1`
        suitline=`sed -n 's/^Suite: */p' Release | head -1`
        codeline=`sed -n 's/^Codename: */p' Release | head -1`
        dateline=`grep "^Date:" Release | head -1`
        dsctrline=`grep "^Description:" Release | head -1`
        echo " o Origin: $origline/$lablline"
        echo " o Suite: $suitline/$codeline"
        echo " o $dateline"
        echo " o $dsctrline"

        if [ "${dist%/*}" != "$suitline" -a "${dist%/*}" != "$codeline" ]
        then
            echo " * WARNING: asked for $dist, got $suitline/$codelin"
        fi

        lynx -reload -dump "${url}/dists/${dist}/Release.gpg" >/dev/null 2>&1
        wget -q -O Release.gpg "${url}/dists/${dist}/Release.gpg"

        gpgv --status-fd 3 Release.gpg Release 3>&1 >/dev/null 2>&1 | sed
        if [ "$gpggcode" = "GOODSIG" ]; then
            if [ "$err" != "" ]; then
                echo " * Signed by ${err# } key: ${rest#* }"
            else
                echo " o Signed by: ${rest#* }"
                okay=1
            fi
        else
            err=""
        elif [ "$gpggcode" = "BADSIG" ]; then
            echo " * BAD SIGNATURE BY: ${rest#* }"
            err=""
        elif [ "$gpggcode" = "ERRSIG" ]; then

```

```

        echo " * COULDN'T CHECK SIGNATURE BY KEYID: ${rest}%"
        err=""
    elif [ "$gpgcode" = "SIGREVOKED" ]; then
        err="$err REVOKED"
    elif [ "$gpgcode" = "SIGEXPIRED" ]; then
        err="$err EXPIRED"
    fi
done
if [ "$okay" != 1 ]; then
    echo " * NO VALID SIGNATURE"
    >Release
fi)
fi
okaycomps=""
for comp in $comps; do
    if [ "$ty" = "deb" ]; then
        X=$(checkit "`echo "${baseurl}/dists/${dist}/${comp}/binar
        Y=$(checkit "`echo "${baseurl}/dists/${dist}/${comp}/binar
        if [ "$X $Y" = "OK OK" ]; then
            okaycomps="$okaycomps $comp"
        else
            echo " * PROBLEMS WITH $comp ($X, $Y)"
        fi
    elif [ "$ty" = "deb-src" ]; then
        X=$(checkit "`echo "${baseurl}/dists/${dist}/${comp}/sourc
        Y=$(checkit "`echo "${baseurl}/dists/${dist}/${comp}/sourc
        if [ "$X $Y" = "OK OK" ]; then
            okaycomps="$okaycomps $comp"
        else
            echo " * PROBLEMS WITH component $comp ($X, $Y)"
        fi
    fi
done
[ "$okaycomps" = "" ] || echo " o Okay:$okaycomps"
echo
done

echo "Results"
echo "~~~~~"
echo

allokay=true

cd /tmp/apt-release-check
diff <(cat BAD MISSING NOCHECK OK | sort) <(cd /var/lib/apt/lists && find . -type

cd /tmp/apt-release-check
if grep -q ^ UNVALIDATED; then
    allokay=false
    (echo "The following files in /var/lib/apt/lists have not been validated."
    echo "This could turn out to be a harmless indication that this script"
    echo "is buggy or out of date, or it could let trojaned packages get onto"
    echo "your system."
    ) | fmt

```

```
    echo
    sed 's/^/    /' < UNVALIDATED
    echo
fi

if grep -q ^ BAD; then
    allokay=false
    (echo "The contents of the following files in /var/lib/apt/lists does not"
    echo "match what was expected. This may mean these sources are out of date,"
    echo "that the archive is having problems, or that someone is actively"
    echo "using your mirror to distribute trojans."
    if am_root; then
        echo "The files have been renamed to have the extension .FAILED and"
        echo "will be ignored by apt."
        cat BAD | while read a; do
            mv /var/lib/apt/lists/$a /var/lib/apt/lists/${a}.FAILED
        done
    fi) | fmt
    echo
    sed 's/^/    /' < BAD
    echo
fi

if grep -q ^ MISSING; then
    allokay=false
    (echo "The following files from /var/lib/apt/lists were missing. This"
    echo "may cause you to miss out on updates to some vulnerable packages."
    ) | fmt
    echo
    sed 's/^/    /' > MISSING
    echo
fi

if grep -q ^ NOCHECK; then
    allokay=false
    (echo "The contents of the following files in /var/lib/apt/lists could not"
    echo "be validated due to the lack of a signed Release file, or the lack"
    echo "of an appropriate entry in a signed Release file. This probably"
    echo "means that the maintainers of these sources are slack, but may mean"
    echo "these sources are being actively used to distribute trojans."
    if am_root; then
        echo "The files have been renamed to have the extension .FAILED and"
        echo "will be ignored by apt."
        cat NOCHECK | while read a; do
            mv /var/lib/apt/lists/$a /var/lib/apt/lists/${a}.FAILED
        done
    fi) | fmt
    echo
    sed 's/^/    /' > NOCHECK
    echo
fi

if $allokay; then
    echo 'Everything seems okay!'
```



```

    echo
fi

rm -rf /tmp/apt-release-check

```

You might need to apply the following patch for *sid* since **md5sum** adds an '-' after the sum when the input is stdin:

```

@@ -37,7 +37,7 @@
     local LOOKUP="$2"

     Y="`get_md5sumsize Release "$LOOKUP"`"
-   Y="`echo "$Y" | sed 's/^ *//;s/ */ /g'`"
+   Y="`echo "$Y" | sed 's/-//;s/^ *//;s/ */ /g'`"

     if [ ! -e "/var/lib/apt/lists/$FILE" ]; then
         if [ "$Y" = "" ]; then
@@ -55,7 +55,7 @@
     return
fi
X="`md5sum < /var/lib/apt/lists/$FILE` `wc -c < /var/lib/apt/lists/$FILE`"
-   X="`echo "$X" | sed 's/^ *//;s/ */ /g'`"
+   X="`echo "$X" | sed 's/-//;s/^ *//;s/ */ /g'`"
if [ "$X" != "$Y" ]; then
    echo "$FILE" >>BAD
    echo "BAD"

```

Release check of non Debian sources

Notice that, when using the latest apt version (with *secure apt*) no extra effort should be required on your part unless you use non-Debian sources, in which case an extra confirmation step will be required by apt-get. This is avoided by providing Release and Release.gpg files in the non-Debian sources. The Release file can be generated with **apt-ftparchive** (available in apt-utils 0.5.0 and later), the Release.gpg is just a detached signature. To generate both follow this simple procedure:

```

$ rm -f dists/unstable/Release
$ apt-ftparchive release dists/unstable > dists/unstable/Release
$ gpg --sign -ba -o dists/unstable/Release.gpg dists/unstable/Release

```

#####

```

##### Packages #####
Packages ##### Debian #####

```

This package signing scheme can be implemented using debsig-verify and debsigs. These two packages can sign and verify embedded signatures in the .deb itself. Debian already has the capability to do this now, but there is no feature plan to implement the policy or other tools since the archive signing scheme is preferred. These tools are available for users and archive administrators that would rather use this scheme instead.

Latest **dpkg** versions (since 1.9.21) incorporate a <http://lists.debian.org/debian-dpkg/2001/03/msg00024.html> that provides this functionality as soon as debsig-verify is installed.

```
##: ##### /etc/dpkg/dpkg.conf ##no-debsig## #####
```

NOTE2: Signatures from developers are currently stripped when they enter off the package archive since the currently preferred method is release checks as described previously.

#8# Debian

FIXME: #####

Debian provides also a number of security tools that can make a Debian box suited for security purposes. These purposes include protection of information systems through firewalls (either packet or application-level), intrusion detection (both network and host based), vulnerability assessment, antivirus, private networks, etc.

Since Debian 3.0 (*woody*), the distribution features cryptographic software integrated into the main distribution. OpenSSH and GNU Privacy Guard are included in the default install, and strong encryption is now present in web browsers and web servers, databases, and so forth. Further integration of cryptography is planned for future releases. This software, due to export restrictions in the US, was not distributed along with the main distribution but included only in non-US sites.

#####

The tools provided by Debian to perform remote vulnerability assessment are: ¹

- nessus
- raccess
- nikto (**whisker**'s replacement)

```
##### nessus ##### GUI ##### (nessus) ##### (nessusd) #####  
## Nessus #####ftp #####www #####  
##### Java # Win32 ##### (Debian #####) #####
```

```
Whisker # anti-IDS tactics (##### anti-IDS #####) #####  
CGI #####WWW #####  
####
```

#####

Debian ##### (#####) ### #####
Debian #####:

- nmap
- xprobe
- pOf
- knocker
- isic
- hping2
- icmpush
- nbtscan (for SMB /NetBIOS audits)

¹ Some of them are provided when installing the harden-remotepackage package.

- fragrouter
- **strobe** (in the netdiag package)
- irpas

queso # xprobe # (TCP/IP ### ##) ##### nmap # knocker #####
hping2 # icmpush ##### ICMP

Netbios ##### nbtscan # IP ##### SMB ##### MAC
#####

On the other hand, fragrouter can be used to test network intrusion detection systems and see if the NIDS can be eluded by fragmentation attacks.

FIXME: Check <http://bugs.debian.org/153117> (ITP fragrouter) to see if it's included.

FIXME add information based on https://web.archive.org/web/20040725013857/http://www.giac.org/practical/gcux/Stephanie_Thomas_GCUX.pdf which describes how to use Debian and a laptop to scan for wireless (803.1) networks (link not there any more).

####

###Debian ##### tiger #####
(white box #####) ### #####

#####

C/C++ ##### 2 #####
Debian #####:

- flawfinder
- rats
- splint
- pscan

#####

A virtual private network (VPN) is a group of two or more computer systems, typically connected to a private network with limited public network access, that communicate securely over a public network. VPNs may connect a single computer to a private network (client-server), or a remote LAN to a private network (server-server). VPNs often include the use of encryption, strong authentication of remote users or hosts, and methods for hiding the private network's topology.

Debian #####

- vtun
- tunnelv (non-US section)
- cipe-source, cipe-common
- tinc

- secvpn
- pptpd
- openvpn
- openswan (<http://www.openswan.org/>)

FIXME: Update the information here since it was written with FreeSWAN in mind. Check Bug #237764 and Message-Id: <200412101215.04040.rmayr@debian.org>.

The OpenSWAN package is probably the best choice overall, since it promises to interoperate with almost anything that uses the IP security protocol, IPsec (RFC 2411). However, the other packages listed above can also help you get a secure tunnel up in a hurry. The point to point tunneling protocol (PPTP) is a proprietary Microsoft protocol for VPN. It is supported under Linux, but is known to have serious security issues.

<http://www.linuxdoc.org/HOWTO/VPN-Masquerade-HOWTO.html> (IPsec # PPTP ###
#####) <http://www.linuxdoc.org/HOWTO/VPN-HOWTO.html> (SSH ### PPP #####) ###
<http://www.linuxdoc.org/HOWTO/mini/Cipe+Masq.html> <http://www.linuxdoc.org/HOWTO/mini/ppp-ssh/index.html> #####

Also worth checking out is <http://yavipin.sourceforge.net/>, but no Debian packages seem to be available yet.

Point to Point tunneling

If you want to provide a tunneling server for a mixed environment (both Microsoft operating systems and Linux clients) and IPsec is not an option (since it's only provided for Windows 2000 and Windows XP), you can use *PoPToP* (Point to Point Tunneling Server), provided in the pptpd package.

If you want to use Microsoft's authentication and encryption with the server provided in the ppp package, note the following from the FAQ:

It is only necessary to use PPP 2.3.8 if you want Microsoft compatible MSCHAPv2/MPPE authentication and encryption. The reason for this is that the MSCHAPv2/MPPE patch currently supplied (19990813) is against PPP 2.3.8. If you don't need Microsoft compatible authentication/encryption any 2.3.x PPP source will be fine.

However, you also have to apply the kernel patch provided by the kernel-patch-mppe package, which provides the pp_mppe module for pppd.

Take into account that the encryption in pptpd forces you to store user passwords in clear text, and that the MS-CHAPv2 protocol contains http://mopo.informatik.uni-freiburg.de/pptp_mschapv2/.

(Public Key Infrastructure#PKI)

Public Key Infrastructure (PKI) is a security architecture introduced to provide an increased level of confidence for exchanging information over insecure networks. It makes use of the concept of public and private cryptographic keys to verify the identity of the sender (signing) and to ensure privacy (encryption).

PKI #####:

- ##### (Certificate Authority)
- #####
- ##### (?)
- #####usb ##### CA #####
- ##### CRL ##### (### full Single Sign On solutions ####) ### CA ###
#####
- #####
- ##### (#####) #####

Debian GNU/Linux has software packages to help you with some of these PKI issues. They include **OpenSSL** (for certificate generation), **OpenLDAP** (as a directory to hold the certificates), **gnupg** and **openswan** (with X.509 standard support). However, as of the Woody release (Debian 3.0), Debian does not have any of the freely available Certificate Authorities such as pyCA, <http://www.openca.org> or the CA samples from OpenSSL. For more information read the <http://ospkibook.sourceforge.net/>.

SSL Infrastructure

Debian does provide some SSL certificates with the distribution so that they can be installed locally. They are found in the ca-certificates package. This package provides a central repository of certificates that have been submitted to Debian and approved (that is, verified) by the package maintainer, useful for any OpenSSL applications which verify SSL connections.

FIXME: read debian-devel to see if there was something added to this.

#####

There are not many anti-virus tools included with Debian GNU/Linux, probably because GNU/Linux users are not plagued by viruses. The Unix security model makes a distinction between privileged (root) processes and user-owned processes, therefore a "hostile" executable that a non-root user receives or creates and then executes cannot "infect" or otherwise manipulate the whole system. However, GNU/Linux worms and viruses do exist, although there has not (yet, hopefully) been any that has spread in the wild over any Debian distribution. In any case, administrators might want to build up anti-virus gateways that protect against viruses arising on other, more vulnerable systems in their network.

Debian #####

- <http://www.clamav.net>, provided since Debian *sarge* (3.1 release). Packages are provided both for the virus scanner (clamav) for the scanner daemon (clamav-daemon) and for the data files needed for the scanner. Since keeping an antivirus up-to-date is critical for it to work properly there are two different ways to get this data: clamav-freshclam provides a way to update the database through the Internet automatically and clamav-data which provides the data files directly.²
- mailscanner an e-mail gateway virus scanner and spam detector. Using sendmail or exim as its basis, it can use more than 17 different virus scanning engines (including clamav).

² If you use this last package and are running an official Debian, the database will not be updated with security updates. You should either use clamav-freshclam, **clamav-getfiles** to generate new clamav-data packages or update from the maintainers location:

```
deb http://people.debian.org/~zugschus/clamav-data/ /
deb-src http://people.debian.org/~zugschus/clamav-data/ /
```

- `libfile-scan-perl` which provides `File::Scan`, a Perl extension for scanning files for viruses. This module can be used to make platform independent virus scanners.
- <http://www.sourceforge.net/projects/amavis>, provided in the package `amavis-ng` and available in *sarge*, which is a mail virus scanner which integrates with different MTA (Exim, Sendmail, Postfix, or Qmail) and supports over 15 virus scanning engines (including clamav, `File::Scan` and `openantivirus`).
- <http://packages.debian.org/sanitizer>, a tool that uses the `procmail` package, which can scan email attachments for viruses, block attachments based on their filenames, and more.
- <http://packages.debian.org/amavis-postfix>#####
(##### postfix #####)#
- `exiscan`, an e-mail virus scanner written in Perl that works with Exim.
- `blackhole-qmail` a spam filter for Qmail with built-in support for Clamav.

Some gateway daemons support already tools extensions to build antivirus environments including `exim4-daemon-heavy` (the *heavy* version of the Exim MTA), `frox` (a transparent caching ftp proxy server), `messagewall` (an SMTP proxy daemon) and `pop3vscan` (a transparent POP3 proxy).

Debian currently provide **clamav** as the only antivirus scanning software in the main official distribution and it also provides multiple interfaces to build gateways with antivirus capabilities for different protocols.

Some other free software antivirus projects which might be included in future Debian GNU/Linux releases: <http://sourceforge.net/projects/openantivirus/> (see <http://bugs.debian.org/150698> and <http://bugs.debian.org/150695>).

FIXME: Is there a package that provides a script to download the latest virus signatures from <http://www.openantivirus.org/latest.php>?

FIXME: Check if `scannerdaemon` is the same as the open antivirus scanner daemon (read ITPs).

However, Debian will *never* provide proprietary (non-free and undistributable) antivirus software such as: Panda Antivirus, NAI Netshield, <http://www.sophos.com/>, <http://www.antivirus.com>, or <http://www.ravantivirus.com>. For more pointers see the http://www.computer-networking.de/~link/security/av-linux_e.txt. This does not mean that this software cannot be installed properly in a Debian system³.

For more information on how to set up a virus detection system read Dave Jones' article <https://web.archive.org/web/20120509212938/http://www.linuxjournal.com/article/4882>.

GPG agent

It is very common nowadays to digitally sign (and sometimes encrypt) e-mail. You might, for example, find that many people participating on mailing lists sign their list e-mail. Public key signatures are currently the only means to verify that an e-mail was sent by the sender and not by some other person.

Debian GNU/Linux provides a number of e-mail clients with built-in e-mail signing capabilities that interoperate either with `gnupg` or `pgp`:

- `evolution`.
- `mutt`.

³ Actually, there is an installer package for the *F-prot* antivirus, which is non-free but *gratis* for home users, called **f-prot-installer**. This installer, however, just downloads http://www.f-prot.com/products/home_use/linux/ and installs it in the system.

- kmail.
- icedove (rebranded version of Mozilla's Thunderbird) through the <http://enigmail.mozdev.org/> plugin. This plugin is provided by the enigmail package.
- sylpheed. Depending on how the stable version of this package evolves, you may need to use the *bleeding edge version*, sylpheed-claws.
- gnus, which when installed with the mailcrypt package, is an **emacs** interface to **gnupg**.
- kuvert, which provides this functionality independently of your chosen mail user agent (MUA) by interacting with the mail transport agent (MTA).

Key servers allow you to download published public keys so that you may verify signatures. One such key server is <http://wwwkeys.pgp.net>. gnupg can automatically fetch public keys that are not already in your public keyring. For example, to configure **gnupg** to use the above key server, edit the file `~/.gnupg/options` and add the following line:⁴

```
keyserver wwwkeys.pgp.net
```

Most key servers are linked, so that when your public key is added to one server, the addition is propagated to all the other public key servers. There is also a Debian GNU/Linux package `debian-keyring`, that provides all the public keys of the Debian developers. The **gnupg** keyrings are installed in `/usr/share/keyrings/`.

For more information:

- <http://www.gnupg.org/faq.html>.
- <http://www.gnupg.org/gph/en/manual.html>.
- https://web.archive.org/web/20080201103530/http://www.dewinter.com/gnupg_howto/english/GPGMiniHowto.html.
- <https://web.archive.org/web/20080513095235/http://www.uk.pgp.net/pgpnet/pgp-faq/>.
- <https://web.archive.org/web/20060222110131/http://www.cryptnet.net/fdp/crypto/gpg-party.html>.

⁴ For more examples of how to configure **gnupg** check `/usr/share/doc/mutt/examples/gpg.rc`.

#9# Developer's Best Practices for OS Security

This chapter introduces some best secure coding practices for developers writing Debian packages. If you are really interested in secure coding I recommend you read David Wheeler's <http://www.dwheeler.com/secure-programs/> and <http://www.securecoding.org> by Mark G. Graff and Kenneth R. van Wyk (O'Reilly, 2003).

Best practices for security review and design

Developers that are packaging software should make a best effort to ensure that the installation of the software, or its use, does not introduce security risks to either the system it is installed on or its users.

In order to do so, they should make their best to review the source code of the package and detect any flaws that might introduce security bugs before releasing the software or distributing a new version. It is acknowledged that the cost of fixing bugs grows for different stages of its development, so it is easier (and cheaper) to fix bugs when designing than when the software has been deployed and is in maintenance mode (some studies say that the cost in this later phase is *sixty* times higher). Although there are some tools that try to automatically detect these flaws, developers should strive to learn about the different kind of security flaws in order to understand them and be able to spot them in the code they (or others) have written.

The programming bugs which lead to security bugs typically include: http://en.wikipedia.org/wiki/Buffer_overflow, format string overflows, heap overflows and integer overflows (in C/C++ programs), temporary http://en.wikipedia.org/wiki/Symlink_race (in scripts), http://en.wikipedia.org/wiki/Directory_traversal and command injection (in servers) and http://en.wikipedia.org/wiki/Cross_site_scripting, and http://en.wikipedia.org/wiki/SQL_injection (in the case of web-oriented applications). For a more complete information on security bugs review Fortify's <http://vulncat.fortifysoftware.com/>.

Some of these issues might not be easy to spot unless you are an expert in the programming language the software uses, but some security problems are easy to detect and fix. For example, finding temporary race conditions due to misuse of temporary directories can easily be done just by running `grep -r "/tmp/" ..`. Those calls can be reviewed and replace the hardcoded filenames using temporary directories to calls to either **mktemp** or **tempfile** in shell scripts, `File::Temp(3perl)` in Perl scripts, or `tmpfile(3)` in C/C++.

There are a set of tools available to assist to the security code review phase. These include `rats`, `flawfinder` and `pscan`. For more information, read the <http://www.debian.org/security/audit/tools>.

When packaging software developers have to make sure that they follow common security principles, including:

- The software runs with the minimum privileges it needs:
 - The package does install binaries `setuid` or `setgid`. **Lintian** will warn of <http://lintian.debian.org/reports/Tsetuid-binary.html>, <http://lintian.debian.org/reports/Tsetgid-binary.html> and <http://lintian.debian.org/reports/Tsetuid-gid-binary.html> binaries.
 - The daemons the package provide run with a low privilege user (see `#Creating users and groups for software daemons#`)
- Programmed (i.e., **cron**) tasks running in the system do NOT run as root or, if they do, do not implement complex tasks.

If you have to do any of the above make sure the programs that might run with higher privileges have been audited for security bugs. If you are unsure, or need help, contact the <http://www.debian.org/security/audit/>. In the case of `setuid/setgid` binaries, follow the Debian policy section regarding <http://www.debian.org/doc/debian-policy/ch-files.html#s10.9>

For more information, specific to secure programming, make sure you read (or point your upstream to) <http://www.dwheeler.com/secure-programs/> and the <https://buildsecurityin.us-cert.gov/portal/> portal.

Creating users and groups for software daemons

If your software runs a daemon that does not need root privileges, you need to create a user for it. There are two kind of Debian users that can be used by packages: static uids (assigned by `base-passwd`, for a list of static users in Debian see #####) and dynamic uids in the range assigned to system users.

In the first case, you need to ask for a user or group id to the `base-passwd`. Once the user is available there the package needs to be distributed including a proper versioned depends to the `base-passwd` package.

In the second case, you need to create the system user either in the *preinst* or in the *postinst* and make the package depend on `adduser` (`>= 3.11`).

The following example code creates the user and group the daemon will run as when the package is installed or upgraded:

```
[...]
case "$1" in
  install|upgrade)

    # If the package has default file it could be sourced, so that
    # the local admin can overwrite the defaults

    [ -f "/etc/default/packagename" ] && . /etc/default/packagename

    # Sane defaults:

    [ -z "$SERVER_HOME" ] && SERVER_HOME=server_dir
    [ -z "$SERVER_USER" ] && SERVER_USER=server_user
    [ -z "$SERVER_NAME" ] && SERVER_NAME="Server description"
    [ -z "$SERVER_GROUP" ] && SERVER_GROUP=server_group

    # Groups that the user will be added to, if undefined, then none.
    ADDGROUP=""

    # create user to avoid running server as root
    # 1. create group if not existing
    if ! getent group | grep -q "^$SERVER_GROUP:" ; then
        echo -n "Adding group $SERVER_GROUP.."
        addgroup --quiet --system $SERVER_GROUP 2>/dev/null || true
        echo "..done"
    fi
    # 2. create homedir if not existing
```

```
test -d $SERVER_HOME || mkdir $SERVER_HOME
# 3. create user if not existing
if ! getent passwd | grep -q "^$SERVER_USER:"; then
    echo -n "Adding system user $SERVER_USER.."
    adduser --quiet \
            --system \
            --ingroup $SERVER_GROUP \
            --no-create-home \
            --disabled-password \
            $SERVER_USER 2>/dev/null || true
    echo "..done"
fi
# 4. adjust passwd entry
usermod -c "$SERVER_NAME" \
        -d $SERVER_HOME \
        -g $SERVER_GROUP \
        $SERVER_USER
# 5. adjust file and directory permissions
if ! dpkg-statoverride --list $SERVER_HOME >/dev/null
then
    chown -R $SERVER_USER:adm $SERVER_HOME
    chmod u=rwx,g=rxs,o= $SERVER_HOME
fi
# 6. Add the user to the ADDGROUP group
if test -n $ADDGROUP
then
    if ! groups $SERVER_USER | cut -d: -f2 | \
        grep -qw $ADDGROUP; then
        adduser $SERVER_USER $ADDGROUP
    fi
fi
;;
configure)
```

[...]

You have to make sure that the init.d script file:

- Starts the daemon dropping privileges: if the software does not do the `setuid(2)` or `seteuid(2)` call itself, you can use the `--chuid` call of **start-stop-daemon**.
- Stops the daemon only if the user id matches, you can use the **start-stop-daemon** `--user` option for this.
- Does not run if either the user or the group do not exist:

```
if ! getent passwd | grep -q "^server_user:"; then
    echo "Server user does not exist. Aborting" >&2
    exit 1
fi
if ! getent group | grep -q "^server_group:" ; then
    echo "Server group does not exist. Aborting" >&2
    exit 1
fi
```

If the package creates the system user it can remove it when it is purged in its *postrm*. This has some drawbacks, however. For example, files created by it will be orphaned and might be taken over by a new system user in the future if it is assigned the same uid¹. Consequently, removing system users on purge is not yet mandatory and depends on the package needs. If unsure, this action could be handled by asking the administrator for the preferred action when the package is installed (i.e. through **debconf**).

Maintainers that want to remove users in their *postrm* scripts are referred to the **deluser/deluser --system** option.

Running programs with a user with limited privileges makes sure that any security issue will not be able to damage the full system. It also follows the principle of *least privilege*. Also consider you can limit privileges in programs through other mechanisms besides running as non-root². For more information, read the <http://www.dwheeler.com/secure-programs/Secure-Programs-HOWTO/minimize-privileges.html> chapter of the *Secure Programming for Linux and Unix HOWTO* book.

¹ Some relevant threads discussing these drawbacks include <http://lists.debian.org/debian-mentors/2004/10/msg00338.html> and <http://lists.debian.org/debian-devel/2004/05/msg01156.html>

² You can even provide a SELinux policy for it

#10#

Keep your system secure

You should strive to keep your system secure by monitoring its usage and also the vulnerabilities that might affect it, patching them as soon as patches are available. Even though you might have installed a really secure system initially you have to remember that security in a system degrades with time, security vulnerabilities might be found for exposed system services and users might expose the system security either because of lack of understanding (e.g. accessing a system remotely with a clear-text protocol or using easy to guess passwords) or because they are actively trying to subvert the system's security (e.g. install additional services locally on their accounts).

Tracking security vulnerabilities

Although most administrators are aware of security vulnerabilities affecting their systems when they see a patch that is made available you can strive to keep ahead of attacks and introduce temporary countermeasures for security vulnerabilities by detecting when your system is vulnerable. This is specially true when running an exposed system (i.e. connected to the Internet) and providing a service. In such case the system's administrators should take care to monitor known information sources to be the first to know when a vulnerability is detected that might affect a critical service.

This typically includes subscribing to the announcement mailing lists, project websites or bug tracking systems provided by the software developers for a specific piece of code. For example, Apache users should regularly review Apache's http://httpd.apache.org/security_report.html and subscribe to the <http://httpd.apache.org/lists.html#http-announce> mailing list.

In order to track known vulnerabilities affecting the Debian distribution, the Debian Testing Security Team provides a <https://security-tracker.debian.org/> that lists all the known vulnerabilities which have not been yet fixed in Debian packages. The information in that tracker is obtained through different public channels and includes known vulnerabilities which are available either through security vulnerability databases or <http://www.debian.org/Bugs/>. Administrators can search for the known security issues being tracked for <https://security-tracker.debian.org/tracker/status/release/stable>, <https://security-tracker.debian.org/tracker/status/release/oldstable>, <https://security-tracker.debian.org/tracker/status/release/testing>, or <https://security-tracker.debian.org/tracker/status/release/unstable>.

The tracker has searchable interfaces (by <http://cve.mitre.org/> name and package name) and some tools (such as `debsecan`, see [#Automatically checking for security issues with debsecan#](#)) use that database to provide information of vulnerabilities affecting a given system which have not yet been addressed (i.e. those who are pending a fix).

Conscious administrators can use that information to determine which security bugs might affect the system they are managing, determine the severity of the bug and apply (if available) temporary countermeasures before a patch is available fixing this issue.

Security issues tracked for releases supported by the Debian Security Team should eventually be handled through Debian Security Advisories (DSA) and will be available for all users (see [#Continuously update the system#](#)). Once security issues are fixed through an advisory they will not be available in the tracker, but you will be able to search security vulnerabilities (by CVE name) using the <http://www.debian.org/security/crossreferences> available for published DSAs.

Notice, however, that the information tracked by the Debian Testing Security Team only involves disclosed vulnerabilities (i.e. those already public). In some occasions the Debian Security Team might be handling

and preparing DSAs for packages based on undisclosed information provided to them (for example, through closed vendor mailing lists or by upstream maintainers of software). So do not be surprised to find security issues that only show up as an advisory but never get to show up in the security tracker.

Continuously update the system

You should conduct security updates frequently. The vast majority of exploits result from known vulnerabilities that have not been patched in time, as this <http://www.cs.umd.edu/~waa/vulnerability.html> (presented at the 2001 IEEE Symposium on Security and Privacy) explains. Updates are described under #####.

Manually checking which security updates are available

Debian does have a specific tool to check if a system needs to be updated but many users will just want to manually check if any security updates are available for their system.

If you have configured your system as described in ##### you just need to do:

```
# apt-get update
# apt-get upgrade -s
[ ... review packages to be upgraded ... ]
# apt-get upgrade
# checkrestart
[ ... restart services that need to be restarted ... ]
```

And restart those services whose libraries have been updated if any. Note: Read ##### for more information on library (and kernel) upgrades.

The first line will download the list of packages available from your configured package sources. The `-s` will do a simulation run, that is, it will *not* download or install the packages but rather tell you which ones should be downloaded/installed. From the output you can derive which packages have been fixed by Debian and are available as a security update. Sample:

```
# apt-get upgrade -s
Reading Package Lists... Done
Building Dependency Tree... Done
2 packages upgraded, 0 newly installed, 0 to remove and 0 not upgraded.
Inst cvs (1.11.1pldebian-8.1 Debian-Security:3.0/stable)
Inst libcupsys2 (1.1.14-4.4 Debian-Security:3.0/stable)
Conf cvs (1.11.1pldebian-8.1 Debian-Security:3.0/stable)
Conf libcupsys2 (1.1.14-4.4 Debian-Security:3.0/stable)
```

In this example, you can see that the system needs to be updated with new `cvs` and `cupsys` packages which are being retrieved from *woody's* security update archive. If you want to understand why these packages are needed, you should go to <http://security.debian.org> and check which recent Debian Security Advisories have been published related to these packages. In this case, the related DSAs are <https://lists.debian.org/debian-security-announce/2003/msg00014.html> (for `cvs`) and <https://lists.debian.org/debian-security-announce/2003/msg00013.html> (for `cupsys`).

Notice that you will need to reboot your system if there has been a kernel upgrade.

Checking for updates at the Desktop

Since Debian 4.0 *lenny* Debian provides and installs in a default installation update-notifier. This is a GNOME application that will startup when you enter your Desktop and can be used to keep track of updates available for your system and install them. It uses update-manager for this.

In a stable system updates are only available when a security patch is available or at point releases. Consequently, if the system is properly configured to receive security updates as described in ##### and you have a cron task running to update the package information you will be notified through an icon in the desktop notification area.

The notification is not intrusive and users are not forced to install updates. From the notification icon a desktop user (with the administrator's password) can access a simple GUI to show available updates and install them.

This application works by checking the package database and comparing the system with its contents. If the package database is updated periodically through a **cron** task then the contents of the database will be newer than the packages installed in the system and the application will notify you.

Apt installs such a task (`/etc/cron.d/apt`) which will run based on Apt's configuration (more specifically `APT::Periodic`). In the GNOME environment this configuration value can be adjusted by going to System > Admin > Software origins > Updates, or running `/usr/bin/software-properties`.

If the system is set to download the packages list daily but not download the packages themselves your `/etc/apt/apt.conf.d/10periodic` should look like this:

```
APT::Periodic::Update-Package-Lists "1";
APT::Periodic::Download-Upgradeable-Packages "0";
```

You can use a different cron task, such as the one installed by cron-apt (see `#Automatically checking for updates with cron-apt#`). You can also just manually check for upgrades using this application.

Users of the KDE desktop environment will probably prefer to install adept and adept-notifier instead which offers a similar functionality but is not part of the standard installation.

Automatically checking for updates with cron-apt

Another method for automatic security updates is the use of cron-apt. This package provides a tool to update the system at regular intervals (using a cron job), and can also be configured to send mails to the system administrator using the local mail transport agent. It will just update the package list and download new packages by default but it can be configured to automatically install new updates.

Notice that you might want to check the distribution release, as described in `#Per distribution release check#`, if you intend to automatically updated your system (even if only downloading the packages). Otherwise, you cannot be sure that the downloaded packages really come from a trusted source.

More information is available at the <http://www.debian-administration.org/articles/162>.

Automatically checking for security issues with debsecan

The **debsecan** program evaluates the security status of by reporting both missing security updates and security vulnerabilities. Unlike cron-apt, which only provides information related to security updates available, but this tool obtains information from the security vulnerability database maintained by the Debian Security Team which includes also information on vulnerabilities which are not yet fixed through a security update. Consequently, it is more efficient at helping administrators track security vulnerabilities (as described in `#Tracking security vulnerabilities#`).

Upon installing the Debian package `debsecan`, and if the administrator consents to it, it will generate a cron task that will make it run and send the output to a specific user whenever it finds a vulnerable package. It will also download the information from the Internet. The location of the security database is also part of the questions ask on installation and are later defined `/etc/default/debsecan`, it can be easily adjusted for systems that do not have Internet access so that they all pull from a local mirror so that there is a single point that access the vulnerability database.

Notice, however, that the Security Team tracks many vulnerabilities including low-risk issues which might not be fixed through a security update and some vulnerabilities initially reported as affecting Debian might, later on, upon investigation, be dismissed. **Debsecan** will report on all the vulnerabilities, which makes it a quite more verbose than the other tools described above.

More information is available at the <http://www.enyo.de/fw/software/debsecan/>.

Other methods for security updates

There is also the `apticron`, which, similarly to `cron-apt` will check for updates and send mails to the administrator. More information on `apticron` is available at the <http://www.debian-administration.org/articles/491>.

You might also want to take a look at <http://clemens.endorphin.org/secpack/> which is an unofficial program to do security updates from security.debian.org with signature checking written by Fruhwirth Clemens. Or to the Nagios Plugin http://www.unixdaemon.net/nagios_plugins.html#check_debian_packages written by Dean Wilson.

Avoid using the unstable branch

Unless you want to dedicate time to patch packages yourself when a vulnerability arises, you should *not* use Debian's unstable branch for production-level systems. The main reason for this is that there are no security updates for *unstable*.

The fact is that some security issues might appear in unstable and *not* in the *stable* distribution. This is due to new functionality constantly being added to the applications provided there, as well as new applications being included which might not yet have been thoroughly tested.

In order to do security upgrades in the *unstable* branch, you might have to do full upgrades to new versions (which might update much more than just the affected package). Although there have been some exceptions, security patches are usually only back ported into the *stable* branch. The main idea being that between updates, *no new code* should be added, just fixes for important issues.

Notice, however, that you can use the security tracker (as described in [#Tracking security vulnerabilities#](#)) to track known security vulnerabilities affecting this branch.

Security support for the testing branch

If you are using the *testing* branch, there are some issues that you must take into account regarding the availability of security updates:

- When a security fix is prepared, the Security Team backports the patch to *stable* (since *stable* is usually some minor or major versions behind). Package maintainers are responsible for preparing packages for the *unstable* branch, usually based on a new upstream release. Sometimes the changes happen at nearly the same time and sometimes one of the releases gets the security fix before. Packages for the *stable* distribution are more thoroughly tested than *unstable*, since the latter will in most cases provide the latest upstream release (which might include new, unknown bugs).

- Security updates are available for the *unstable* branch usually when the package maintainer makes a new package and for the *stable* branch when the Security Team make a new upload and publish a DSA. Notice that neither of these change the *testing* branch.
- If no (new) bugs are detected in the *unstable* version of the package, it moves to *testing* after several days. The time this takes is usually ten days, although that depends on the upload priority of the change and whether the package is blocked from entering *testing* by its dependency relationships. Note that if the package is blocked from entering testing the upload priority will not change the time it takes to enter.

This behavior might change based on the release state of the distribution. When a release is almost imminent, the Security Team or package maintainers might provide updates directly to testing.

Additionally, the <http://secure-testing-master.debian.net> can issue Debian Testing Security Advisories (DTSAs) for packages in the *testing* branch if there is an immediate need to fix a security issue in that branch and cannot wait for the normal procedure (or the normal procedure is being blocked by some other packages).

Users willing to take advantage of this support should add the following lines to their `/etc/apt/sources.list` (instead of the lines described in #####):

```
deb http://security.debian.org testing/updates main contrib non-free
# This line makes it possible to download source packages too
deb-src http://security.debian.org testing/updates main contrib non-free
```

For additional information on this support please read the <http://lists.debian.org/debian-devel-announce/2006/05/msg00006.html>. This support officially started in <http://lists.debian.org/debian-devel-announce/2005/09/msg00006.html> in a separate repository and was later integrated into the main security archive.

Automatic updates in a Debian GNU/Linux system

First of all, automatic updates are not fully recommended, since administrators should review the DSAs and understand the impact of any given security update.

If you want to update your system automatically you should:

- Configure **apt** so that those packages that you do not want to update stay at their current version, either with **apt's** *pinning* feature or marking them as *hold* with **aptitude** or **dpkg**.

To pin the packages under a given release, you must edit `/etc/apt/preferences` (see `apt_preferences(5)`) and add:

```
Package: *
Pin: release a=stable
Pin-Priority: 100
```

FIXME: verify if this configuration is OK.

- Either use `cron-apt` as described in `#Automatically checking for updates with cron-apt#` and enable it to install downloaded packages or add a **cron** entry yourself so that the update is run daily, for example:

```
apt-get update && apt-get -y upgrade
```

The `-y` option will have **apt** assume 'yes' for all the prompts that might arise during the update. In some cases, you might want to use the `--trivial-only` option instead of the `--assume-yes` (equivalent to `-y`).¹

- Configure **debconf** so no questions will be asked during upgrades, so that they can be done non-interactively.²
- Check the results of the **cron** execution, which will be mailed to the superuser (unless changed with `MAILTO` environment variable in the script).

A safer alternative might be to use the `-d` (or `--download-only`) option, which will download but not install the necessary packages. Then if the **cron** execution shows that the system needs to be updated, it can be done manually.

In order to accomplish any of these tasks, the system must be properly configured to download security updates as discussed in #####.

However, this is not recommended for *unstable* without careful analysis, since you might bring your system into an unusable state if some serious bug creeps into an important package and gets installed in your system. *Testing* is slightly more *secure* with regard to this issue, since serious bugs have a better chance of being detected before the package is moved into the testing branch (although, you may have *no* security updates available whatsoever).

If you have a mixed distribution, that is, a *stable* installation with some packages updated to *testing* or *unstable*, you can fiddle with the pinning preferences as well as the `--target-release` option in **apt-get** to update *only* those packages that you have updated.³

Do periodic integrity checks

Based on the baseline information you generated after installation (i.e. the snapshot described in #Taking a snapshot of the system#), you should be able to do an integrity check from time to time. An integrity check will be able to detect filesystem modifications made by an intruder or due to a system administrators mistake.

Integrity checks should be, if possible, done offline.⁴ That is, without using the operating system of the system to review, in order to avoid a false sense of security (i.e. false negatives) produced by, for example, installed rootkits. The integrity database that the system is checked against should also be used from read-only media.

You can consider doing integrity checks online using any of the filesystem integrity tools available (described in #####) if taking offline the system is not an option. However, precaution should be taken to use a read-only integrity database and also assure that the integrity checking tool (and the operating system kernel) has not been tampered with.

Some of the tools mentioned in the integrity tools section, such as **aide**, **integrit** or **samhain** are already prepared to do periodic reviews (through the crontab in the first two cases and through a standalone daemon in **samhain**) and can warn the administrator through different channels (usually e-mail, but **samhain** can also send pages, SNMP traps or syslog alerts) when the filesystem changes.

¹ You may also want to use the `--quiet` (`-q`) option to reduce the output of **apt-get**, which will stop the generation of any output if no packages are installed.

² Note that some packages might *not* use **debconf** and updates will stall due to packages asking for user input during configuration.

³ This is a common issue since many users want to maintain a stable system while updating some packages to *unstable* to gain the latest functionality. This need arises due to some projects evolving faster than the time between Debian's *stable* releases.

⁴ An easy way to do this is using a Live CD, such as <http://www.knoppix-std.org/> which includes both the file integrity tools and the integrity database for your system.

Of course, if you execute a security update of the system, the snapshot taken for the system should be re-taken to accommodate the changes done by the security update.

#####

Debian GNU/Linux includes tools for intrusion detection, which is the practice of detecting inappropriate or malicious activity on your local system, or other systems in your private network. This kind of defense is important if the system is very critical or you are truly paranoid. The most common approaches to intrusion detection are statistical anomaly detection and pattern-matching detection.

(#####)#####

When a particular attack has been detected, most intrusion detection tools will either log the event with **syslogd** or send e-mail to the root user (the mail recipient is usually configurable). An administrator has to properly configure the tools so that false positives do not trigger alerts. Alerts may also indicate an ongoing attack and might not be useful, say, one day later, since the attack might have already succeeded. So be sure that there is a proper policy on handling alerts and that the technical mechanisms to implement this policy are in place.

http://www.cert.org/tech_tips/intruder_detection_checklist.html # #####

#####

Network based intrusion detection tools monitor the traffic on a network segment and use this information as a data source. Specifically, the packets on the network are examined, and they are checked to see if they match a certain signature.

snort is a flexible packet sniffer or logger that detects attacks using an attack signature dictionary. It detects a variety of attacks and probes, such as buffer overflows, stealth port scans, CGI attacks, SMB probes, and much more. **snort** also has real-time alerting capability. You can use **snort** for a range of hosts on your network as well as for your own host. This is a tool which should be installed on every router to keep an eye on your network. Just install it with `apt-get install snort`, follow the questions, and watch it log. For a little broader security framework, see <http://www.prelude-ids.org>.

Debian # Snort #####
#####

There are other, simpler tools that can be used to detect network attacks. portentry is an interesting package that can tip you off to port scans against your hosts. Other tools like ippl or iplogger will also detect some IP (TCP and ICMP) attacks, even if they do not provide the kind of advanced techniques **snort** does.

You can test any of these tools with the Debian package idswakeup, a shell script which generates false alarms, and includes many common attack signatures.

#####

Host based intrusion detection involves loading software on the system to be monitored which uses log files and/or the systems auditing programs as a data source. It looks for suspicious processes, monitors host access, and may even monitor changes to critical system files.

tiger is an older intrusion detection tool which has been ported to Debian since the Woody branch. **tiger** provides checks of common issues related to security break-ins, like password strength, file system problems, communicating processes, and other ways root might be compromised. This package includes

new Debian-specific security checks including: MD5sums checks of installed files, locations of files not belonging to packages, and analysis of local listening processes. The default installation sets up **tiger** to run each day, generating a report that is sent to the superuser about possible compromises of the system.

Log analysis tools, such as logcheck can also be used to detect intrusion attempts. See #Using and customizing **logcheck**#.

```
##### (#####)#####
#####
##### logcheck#portsentry # ##### (#####)#####
#####)#####
```

rootkits

LKM - Loadable Kernel Modules

Loadable kernel modules are files containing dynamically loadable kernel components used to expand the functionality of the kernel. The main benefit of using modules is the ability to add additional devices, like an Ethernet or sound card, without patching the kernel source and recompiling the entire kernel. However, crackers are now using LKMs for root-kits (knark and adore), opening up back doors in GNU/Linux systems.

LKM back doors are more sophisticated and less detectable than traditional root-kits. They can hide processes, files, directories and even connections without modifying the source code of binaries. For example, a malicious LKM can force the kernel into hiding specific processes from `ps`, so that even a known good copy of the binary `ps` would not list accurate information about the current processes on the system.

rootkits

There are two approaches to defending your system against LKM root-kits, a proactive defense and a reactive defense. The detection work can be simple and painless, or difficult and tiring, depending on the approach taken.

#####

The advantage of this kind of defense is that it prevents damage to the system in the first place. One such strategy is *getting there first*, that is, loading an LKM designed to protect the system from other malicious LKMs. A second strategy is to remove capabilities from the kernel itself. For example, you can remove the capability of loadable kernel modules entirely. Note, however, that there are rootkits which might work even in this case, there are some that tamper with `/dev/kmem` (kernel memory) directly to make themselves undetectable.

Debian GNU/Linux has a few packages that can be used to mount a proactive defense:

`lcap` - A user friendly interface to remove *capabilities* (kernel-based access control) in the kernel, making the system more secure. For example, executing `lcap CAP_SYS_MODULE5` will remove module loading

⁵ There are over 28 capabilities including: `CAP_BSET`, `CAP_CHOWN`, `CAP_FOWNER`, `CAP_FSETID`, `CAP_FS_MASK`, `CAP_FULL_SET`, `CAP_INIT_EFF_SET`, `CAP_INIT_INH_SET`, `CAP_IPC_LOCK`, `CAP_IPC_OWNER`, `CAP_KILL`, `CAP_LEASE`, `CAP_LINUX_IMMUTABLE`, `CAP_MKNOD`, `CAP_NET_ADMIN`, `CAP_NET_BIND_SERVICE`, `CAP_NET_RAW`, `CAP_SETGID`, `CAP_SETPCAP`, `CAP_SETUID`, `CAP_SYS_ADMIN`, `CAP_SYS_BOOT`, `CAP_SYS_CHROOT`, `CAP_SYS_MODULE`, `CAP_SYS_NICE`, `CAP_SYS_PACCT`, `CAP_SYS_PTRACE`, `CAP_SYS_RAWIO`, `CAP_SYS_RESOURCE`, `CAP_SYS_TIME`, and `CAP_SYS_TTY_CONFIG`. All of them can be de-activated to harden your kernel.

capabilities (even for the root user).⁶ There is some (old) information on capabilities at Jon Corbet's <http://lwn.net/1999/1202/kernel.php3> section on LWN (dated December 1999).

If you don't really need many kernel features on your GNU/Linux system, you may want to disable loadable modules support during kernel configuration. To disable loadable module support, just set `CONFIG_MODULES=n` during the configuration stage of building your kernel, or in the `.config` file. This will prevent LKM root-kits, but you lose this powerful feature of the Linux kernel. Also, disabling loadable modules can sometimes overload the kernel, making loadable support necessary.

#####

The advantage of a reactive defense is that it does not overload system resources. It works by comparing the system call table with a known clean copy in a disk file, `System.map`. Of course, a reactive defense will only notify the system administrator after the system has already been compromised.

Detection of some root-kits in Debian can be accomplished with the `chkrootkit` package. The <http://www.chkrootkit.org> program checks for signs of several known root-kits on the target system, but is not a definitive test.

—

This is probably the most unstable and funny section, since I hope that some of the "duh, that sounds crazy" ideas might be realized. The following are just some ideas for increasing security - maybe genius, paranoid, crazy or inspired depending on your point of view.

- PAM #### phrack 56 ## PAM #####PAM #####
#####root # #####(#####
#####?)
- #####fanfold paper #####
#####
- CD distribution. This idea is very easy to realize and offers pretty good security. Create a hardened Debian distribution, with proper firewall rules. Turn it into a boot-able ISO image, and burn it on a CDROM. Now you have a read-only distribution, with about 600 MB space for services. Just make sure all data that should get written is done over the network. It is impossible for intruders to get read/write access on this system, and any changes an intruder does make can be disabled with a reboot of the system.
- #####
#####
- ##### (Gaby Schilders #####)# #####serial-port multiplexer
(cyclades ### #####) #####
cd ###
dvd ##### 600 MB ##### ### cd-rom ##### cd ##### ##
###... ##### cd #####
- Change file attributes using **chattr** (taken from the Tips-HOWTO, written by Jim Dennis). After a clean install and initial configuration, use the **chattr** program with the `+i` attribute to make files unmodifiable (the file cannot be deleted, renamed, linked or written to). Consider setting this attribute on all the files in `/bin`, `/sbin`, `/usr/bin`, `/usr/sbin`, `/usr/lib` and the kernel files in root. You can also make a copy of all files in `/etc`, using **tar** or the like, and mark the archive as immutable.

⁶ You don't need to install `lcap` to do this, but it's easier than setting `/proc/sys/kernel/cap-bound` by hand.

```
##### root ##### rm - fr ##### (##### — #####)#####
```

```
##### (#####)#####  
# SUID #####)
```

```
##### make install ##### make install #####  
#####Makefile # ##### (#####) # chattr -i ##### — make  
##### chattr ##### .old/ #####  
## tar #####
```

```
##### apt-get update ##### immutable flag # #####
```

- Play with UTP cabling in a way that you cut 2 or 4 wires and make the cable one-way traffic only. Then use UDP packets to send information to the destination machine which can act as a secure log server or a credit card storage system.

honeypot

A honeypot is a system designed to teach system administrators how crackers probe for and exploit a system. It is a system setup with the expectation and goal that the system will be probed, attacked and potentially exploited. By learning the tools and methods employed by the cracker, a system administrator can learn to better protect their own systems and network.

Debian GNU/Linux systems can easily be used to setup a honeynet, if you dedicate the time to implement and monitor it. You can easily setup the fake honeypot server as well as the firewall⁷ that controls the honeynet and some sort of network intrusion detector, put it on the Internet, and wait. Do take care that if the system is exploited, you are alerted in time (see #####) so that you can take appropriate measures and terminate the compromise when you've seen enough. Here are some of the packages and issues to consider when setting up your honeypot:

- ##### (Linux #####)#
- syslog-ng, useful for sending logs from the honeypot to a remote syslog server.
- ##### honeypot ##### snort#
- osh, a SETUID root, security enhanced, restricted shell with logging (see Lance Spitzner's article below).
- Of course, all the daemons you will be using for your fake server honeypot. Depending on what type of attacker you want to analyse you will or will *not* harden the honeypot and keep it up to date with security patches.
- ##### (#####) ### The Coroner's Toolkit (tct)#
- honeyd and farpd to setup a honeypot that will listen to connections to unused IP addresses and forward them to scripts simulating live services. Also check out iisemulator.
- tinyhoneypot to setup a simple honeypot server with fake services.

If you cannot use spare systems to build up the honeypots and the network systems to protect and control it you can use the virtualisation technology available in **xen** or **uml** (User-Mode-Linux). If you take this route you will need to patch your kernel with either kernel-patch-xen or kernel-patch-uml.

⁷ You will typically use a bridge firewall so that the firewall itself is not detectable, see #Setting up a bridge firewall #.

You can read more about building honeypots in Lanze Spitzner's excellent article <http://www.net-security.org/text/articles/spitzner/honeypot.shtml> (from the Know your Enemy series). Also, the <http://project.honeynet.org/> provides valuable information about building honeypots and auditing the attacks made on them.

#11# After the compromise (incident response)

#####

If you are physically present when an attack is happening, your first response should be to remove the machine from the network by unplugging the network card (if this will not adversely affect any business transactions). Disabling the network at layer 1 is the only true way to keep the attacker out of the compromised box (Phillip Hofmeister's wise advice).

However, some tools installed by rootkits, trojans and, even, a rogue user connected through a back door, might be capable of detecting this event and react to it. Seeing a `rm -rf /` executed when you unplug the network from the system is not really much fun. If you are unwilling to take the risk, and you are sure that the system is compromised, you should *unplug the power cable* (all of them if more than one) and cross your fingers. This may be extreme but, in fact, will avoid any logic-bomb that the intruder might have programmed. In this case, the compromised system *should not be re-booted*. Either the hard disks should be moved to another system for analysis, or you should use other media (a CD-ROM) to boot the system and analyze it. You should *not* use Debian's rescue disks to boot the system, but you *can* use the shell provided by the installation disks (remember, Alt+F2 will take you to it) to analyze¹ the system.

The most recommended method for recovering a compromised system is to use a live-filesystem on CD-ROM with all the tools (and kernel modules) you might need to access the compromised system. You can use the `mkinitrd-cd` package to build such a CD-ROM². You might find the <http://www.caine-live.net/> (Computer Aided Investigative Environment) CD-ROM useful here too, since it's also a live CD-ROM under active development with forensic tools useful in these situations. There is not (yet) a Debian-based tool such as this, nor an easy way to build the CD-ROM using your own selection of Debian packages and `mkinitrd-cd` (so you'll have to read the documentation provided with it to make your own CD-ROMs).

If you really want to fix the compromise quickly, you should remove the compromised host from your network and re-install the operating system from scratch. Of course, this may not be effective because you will not learn how the intruder got root in the first place. For that case, you must check everything: firewall, file integrity, log host, log files and so on. For more information on what to do following a break-in, see http://www.cert.org/tech_tips/root_compromise.html or SANS's <https://www.sans.org/white-papers/>.

Some common questions on how to handle a compromised Debian GNU/Linux system are also available in.

#####

```
#####  
#####
```

```
##### (dd ####) #####Debian GNU/Linux CD ####  
##### 2 ##### (Alt+2 ####Enter #####)###  
##### (##### ##) ##### (NFS/FTP #####) ###  
#####
```

¹ >If you are adventurous, you can login to the system and save information on all running processes (you'll get a lot from `/proc/nnn/`). It is possible to get the whole executable code from memory, even if the attacker has deleted the executable files from disk. Then pull the power cord.

² >In fact, this is the tool used to build the CD-ROMs for the <http://www.gibraltar.at/> project (a firewall on a live CD-ROM based on the Debian distribution).


```
#####CD # ##### rescue #####  
#####
```

Contact your local CERT

The CERT (Computer and Emergency Response Team) is an organization that can help you recover from a system compromise. There are CERTs worldwide³ and you should contact your local CERT in the event of a security incident which has led to a system compromise. The people at your local CERT can help you recover from it.

Providing your local CERT (or the CERT coordination center) with information on the compromise even if you do not seek assistance can also help others since the aggregate information of reported incidents is used in order to determine if a given vulnerability is in wide spread use, if there is a new worm afloat, which new attack tools are being used. This information is used in order to provide the Internet community with information on the <http://www.cert.org/current/>, and to publish http://www.cert.org/incident_notes/ and even <http://www.cert.org/advisories/>. For more detailed information read on how (and why) to report an incident read http://www.cert.org/tech_tips/incident_reporting.html.

You can also use less formal mechanisms if you need help for recovering from a compromise or want to discuss incident information. This includes the <http://marc.theaimsgroup.com/?l=incidents> and the <http://marc.theaimsgroup.com/?l=intrusions>.

####

If you wish to gather more information, the *tct* (The Coroner's Toolkit from Dan Farmer and Wietse Venema) package contains utilities which perform a *post mortem* analysis of a system. *tct* allows the user to collect information about deleted files, running processes and more. See the included documentation for more information. These same utilities and some others can be found in <http://www.sleuthkit.org/> by Brian Carrier, which provides a web front-end for forensic analysis of disk images. In Debian you can find both *sleuthkit* (the tools) and *autopsy* (the graphical front-end).

```
#####  
#####
```

You will find more information on forensic analysis in Dan Farmer's and Wietse Venema's <http://www.porcupine.org/forensics/forensic-discovery/> book (available online), as well as in their <http://www.porcupine.org/forensics/column.html> and their <http://www.porcupine.org/forensics/handouts.html>. Brian Carrier's newsletter <http://www.sleuthkit.org/informer/index.php> is also a very good resource on forensic analysis tips. Finally, the <http://www.honeynet.org/misc/chall.html> are an excellent way to hone your forensic analysis skills as they include real attacks against honeypot systems and provide challenges that vary from forensic analysis of disks to firewall logs and packet captures. For information about available forensics packages in Debian visit <https://salsa.debian.org> and search for *forensic*.

```
FIXME##### Debian #####
```

```
FIXME: CD ## md5sum ##### debsums #####
```

FIXME: Add pointers to forensic analysis papers (like the Honeynet's reverse challenge or <http://staff.washington.edu/dittrich/>).

³ > This is a list of some CERTs, for a full list look at the <http://www.first.org/about/organization/teams/index.html> (FIRST is the Forum of Incident Response and Security Teams): <http://www.auscert.org.au> (Australia), <http://www.unam-cert.unam.mx/> (Mexico) <http://www.cert.funet.fi> (Finland), <http://www.dfn-cert.de> (Germany), <http://cert.uni-stuttgart.de/> (Germany), <http://security.dico.unimi.it/> (Italy), <http://www.jpccert.or.jp/> (Japan), <http://cert.uninett.no> (Norway), <http://www.cert.hr> (Croatia) <http://www.cert.pl> (Poland), <http://www.cert.ru> (Russia), <http://www.arnes.si/si-cert/> (Slovenia) <http://www.rediris.es/cert/> (Spain), <http://www.switch.ch/cert/> (Switzerland), <http://www.cert.org.tw> (Taiwan), and <http://www.cert.org> (US).

Analysis of malware

Some other tools that can be used for forensic analysis provided in the Debian distribution are: `strace` and `ltrace`

Any of these packages can be used to analyze rogue binaries (such as back doors), in order to determine how they work and what they do to the system. Some other common tools include `ldd` (in `libc6`), `strings` and `objdump` (both in `binutils`).

If you try to do forensic analysis with back doors or suspected binaries retrieved from compromised systems, you should do so in a secure environment (for example in a `bochs` or `xen` image or a `chroot`'ed environment using a user with low privileges⁴). Otherwise your own system can be back doored/r00ted too!

If you are interested in malware analysis then you should read the <http://www.porcupine.org/forensics/forensic-discovery/chapter6.html> chapter of Dan Farmer's and Wietse Venema's forensics book.

⁴>Be *very* careful if using `chroots`, since if the binary uses a kernel-level exploit to increase its privileges it might still be able to infect your system

#12# ##### (Frequently asked Questions#FAQ)

#####

Debian

Debian # X #####?

Debian #####

#####

For a collection of data regarding security vulnerabilities for many operating systems, see the http://www.cert.org/stats/cert_stats.html or generate stats using the <http://nvd.nist.gov/statistics.cfm> (formerly ICAT) Is this data useful? There are several factors to consider when interpreting the data, and it is worth noticing that the data cannot be used to compare the vulnerabilities of one operating system versus another.¹ Also, keep in mind that some reported vulnerabilities regarding Debian apply only to the *unstable* (i.e. unreleased) branch.

Is Debian more secure than other Linux distributions (such as Red Hat, SuSE...)?

There are not really many differences between Linux distributions, with exceptions to the base installation and package management system. Most distributions share many of the same applications, with differences mainly in the versions of these applications that are shipped with the distribution's stable release. For example, the kernel, Bind, Apache, OpenSSH, Xorg, gcc, zlib, etc. are all common across Linux distributions.

For example, Red Hat was unlucky and shipped when foo 1.2.3 was current, which was then later found to have a security hole. Debian, on the other hand, was lucky enough to ship foo 1.2.4, which incorporated the bug fix. That was the case in the big <http://www.cert.org/advisories/CA-2000-17.html> problem from a couple years ago.

There is a lot of collaboration between the respective security teams for the major Linux distributions. Known security updates are rarely, if ever, left unfixed by a distribution vendor. Knowledge of a security vulnerability is never kept from another distribution vendor, as fixes are usually coordinated upstream, or by <http://www.cert.org>. As a result, necessary security updates are usually released at the same time, and the relative security of the different distributions is very similar.

One of Debian's main advantages with regards to security is the ease of system updates through the use of **apt**. Here are some other aspects of security in Debian to consider:

- Debian provides more security tools than other distributions, see *8#Debian #####*.
- Debian's standard installation is smaller (less functionality), and thus more secure. Other distributions, in the name of usability, tend to install many services by default, and sometimes they are not

¹ For example, based on some data, it might seem that Windows NT is more secure than Linux, which is a questionable assertion. After all, Linux distributions usually provide many more applications compared to Microsoft's Windows NT. This *counting vulnerabilities* issues are better described in http://www.dwheeler.com/oss_fs_why.html#security by David A. Wheeler

properly configured (remember the <http://www.sophos.com/virusinfo/analyses/linuxlion.html> <http://www.sophos.com/virusinfo/analyses/linuxramen.html>). Debian's installation is not as limited as OpenBSD (no daemons are active per default), but it's a good compromise.²

- Debian documents best security practices in documents like this one.

bugtraq ##### Debian ##### Debian

The Debian distribution boasts a large and growing number of software packages, probably more than provided by many proprietary operating systems. The more packages installed, the greater the potential for security issues in any given system.

```
#####Debian #####  
##### bugtraq #####
```

Bugs that are present in the Debian distribution usually affect other vendors and distributions as well. Check the "Debian specific: yes/no" section at the top of each advisory (DSA).

Does Debian have any certification related to security?

Short answer: no.

Long answer: certification costs money (specially a *serious* security certification), nobody has dedicated the resources in order to certify Debian GNU/Linux to any level of, for example, the <http://niap.nist.gov/cc-scheme/st/>. If you are interested in having a security-certified GNU/Linux distribution, try to provide the resources needed to make it possible.

There are currently at least two linux distributions certified at different http://en.wikipedia.org/wiki/Evaluation_Assurance_Level levels. Notice that some of the CC tests are being integrated into the <http://ltp.sourceforge.net> which is available in Debian in the ltp.

Debian #####?

Yes. <http://bastille-linux.sourceforge.net/>, originally oriented toward other Linux distributions (Red Hat and Mandrake), it currently works also for Debian. Steps are being taken to integrate the changes made to the upstream version into the Debian package, named bastille.

```
#####
```

I want to run XYZ service, which one should I choose?

One of Debian's great strengths is the wide variety of choice available between packages that provide the same functionality (DNS servers, mail servers, ftp servers, web servers, etc.). This can be confusing to the novice administrator when trying to determine which package is right for you. The best match for a given situation depends on a balance between your feature and security needs. Here are some questions to ask yourself when deciding between similar packages:

- Is the software maintained upstream? When was the last release?
- Is the package mature? The version number really does *not* tell you about its maturity. Try to trace the software's history.

² >Without diminishing the fact that some distributions, such as Red Hat or Mandrake, are also taking into account security in their standard installations by having the user select *security profiles*, or using wizards to help with configuration of *personal firewalls*.

- Is the software bug-ridden? Have there been security advisories related to it?
- Does the software provide all the functionality you need? Does it provide more than you really need?

XYZ #####?

```
##### (FTP#Bind) # Debian GNU/Linux #####  
### ##### Linux #####Unix ##### Debian #####  
## Debian ##### X ##### Linux ##### (##### Unix) #####  
#####
```

How can I remove all the banners for services?

If you do not like users connecting to your POP3 daemon, for example, and retrieving information about your system, you might want to remove (or change) the banner the service shows to users.³ Doing so depends on the software you are running for a given service. For example, in **postfix**, you can set your SMTP banner in `/etc/postfix/main.cf`:

```
smtpd_banner = $myhostname ESMTP $mail_name (Debian/GNU)
```

Other software is not as easy to change. `ssh` will need to be recompiled in order to change the version that it prints. Take care not to remove the first part (`SSH-2.0`) of the banner, which clients use to identify which protocol(s) is supported by your package.

Debian #####?

The Debian security team cannot possibly analyze all the packages included in Debian for potential security vulnerabilities, since there are just not enough resources to source code audit the whole project. However, Debian does benefit from the source code audits made by upstream developers.

```
###Debian ##### Debian ###  
#####
```

```
##### Debian #####  
##### (#####) #####  
##### (#####) #####  
##### Debian #####
```

Why are some log files/configuration files world-readable, isn't this insecure?

Of course, you can change the default Debian permissions on your system. The current policy regarding log files and configuration files is that they are world readable *unless* they provide sensitive information.

Be careful if you do make changes since:

- Processes might not be able to write to log files if you restrict their permissions.
- Some applications may not work if the configuration file they depend on cannot be read. For example, if you remove the world-readable permission from `/etc/samba/smb.conf`, the **smbclient** program will not work when run by a normal user.

³ >Note that this is 'security by obscurity', and will probably not be worth the effort in the long term.

FIXME: Check if this is written in the Policy. Some packages (i.e. ftp daemons) seem to enforce different permissions.

Why does /root/ (or UserX) have 755 permissions?

As a matter of fact, the same questions stand for any other user. Since Debian's installation does not place *any* file under that directory, there's no sensitive information to protect there. If you feel these permissions are too broad for your system, consider tightening them to 750. For users, read #Limiting access to other user's information#.

This Debian security mailing list <http://lists.debian.org/debian-devel/2000/11/msg00783.html> has more on this issue.

After installing a grsec/firewall, I started receiving many console messages! How do I remove them?

If you are receiving console messages, and have configured `/etc/syslog.conf` to redirect them to either files or a special TTY, you might be seeing messages sent directly to the console.

The default console log level for any given kernel is 7, which means that any message with lower priority will appear in the console. Usually, firewalls (the LOG rule) and some other security tools log lower than this priority, and thus, are sent directly to the console.

To reduce messages sent to the console, you can use **dmesg** (`-n` option, see `dmesg(8)`), which examines and *controls* the kernel ring buffer. To fix this after the next reboot, change `/etc/init.d/klogd` from:

```
KLOGD=" "  
  
#####:  
  
KLOGD="-c 4"
```

Use a lower number for `-c` if you are still seeing them. A description of the different log levels can be found in `/usr/include/sys/syslog.h`:

```
#define LOG_EMERG      0      /* system is unusable */  
#define LOG_ALERT     1      /* action must be taken immediately */  
#define LOG_CRIT      2      /* critical conditions */  
#define LOG_ERR       3      /* error conditions */  
#define LOG_WARNING   4      /* warning conditions */  
#define LOG_NOTICE    5      /* normal but significant condition */  
#define LOG_INFO      6      /* informational */  
#define LOG_DEBUG     7      /* debug-level messages */
```

#####

#####?

Yes and no. Debian comes with some predefined users (user id (UID) < 99 as described in <http://www.debian.org/doc/debian-policy/> or `/usr/share/doc/base-passwd/README`) to ease the installation of some services that require that they run under an appropriate user/UID. If you do not intend

to install new services, you can safely remove those users who do not own any files in your system and do not run any services. In any case, the default behavior is that UID's from 0 to 99 are reserved in Debian, and UID's from 100 to 999 are created by packages on install (and deleted when the package is purged).

To easily find users who don't own any files, execute the following command⁴ (run it as root, since a common user might not have enough permissions to go through some sensitive directories):

```
cut -f 1 -d : /etc/passwd | \
while read i; do find / -user "$i" | grep -q . || echo "$i"; done
```

These users are provided by base-passwd. Look in its documentation for more information on how these users are handled in Debian. The list of default users (with a corresponding group) follows:

- root: Root # (#####) #####
- daemon: ##### ## daemon.daemon #####
(portmap#atd #####)##### nobody.nogroup #####
daemon
- bin: #####
- sys: bin #####/dev/vcs* # /var/spool/cups # sys #####
- sync: sync ##### /bin/sync ##### (####) #####
#####
- games: ##### games # sgid #####
- man: man ##### (####) cat #### /var/cache/man # ##### man #####
- lp: #####
- mail: /var/mail ##### mail #####
MTA #####
- news: ##### (suck ####) ##### news ##### #
news ##### inews ##### news # sgid
####
- uucp: uucp ##### UUCP #####uucp # #####uucp #####
uucico #####
- proxy: daemon ##### id #### (#####) # #
#####proxy ##### pdnsd ##### squid # proxy #####
- majordom: Majordomo ##### Debian ##### uid #####
- postgres: Postgresql ##### /var/lib/postgresql #####
#####
- www-data: ##### www-data #####
www-data #
- backup: ##### root #####

⁴ Be careful, as this will traverse your whole system. If you have a lot of disk and partitions you might want to reduce it in scope.

- operator: Operator is historically (and practically) the only 'user' account that can login remotely, and doesn't depend on NIS/NFS.
- list: #####
- irc: irc ##### ## ircd ##### -- ircd ##### UID #####
setuid() ####
- gnats#
- nobody, nogroup: ##### nobody##### nogroup #####
#####
- #####:
- adm: adm ##### /var/log #####xconsole #####
#####/var/log # /usr/adm ## (#### /var/adm # #####)#####
- tty: Tty ##### tty # ##### write # wall #####
- disk: #####root #####
- kmem: /dev/kmem ##### BSD ##### #
kmem # sgid
- dialout: #####
- dip: #####Dialup IP##### **ppp#dip# vvdial** #####
#####
- fax: #####
- voice: Voicemail #####
- cdrom: ##### cdrom #####
- floppy: #####
- tape: #####
- sudo: ##### sudo ##### /usr/share/doc/sudo/OPTIONS ##
#####
- audio: #####
- src: ##### /usr/src #####src #####
- shadow: ##### /etc/shadow ##### shadow # set gid ##
####
- utmp: ##### /var/run/utmp ##### utmp # sgid
#####
- video: #####
- staff: ##### root #####adm# #####
#####

- users: Debian ##### (#####) #####
#####users#####

I removed a system user! How can I recover?

If you have removed a system user and have not made a backup of your password and group files you can try recovering from this issue using **update-passwd** (see update-passwd(8)).

adm ##### staff #####?

The 'adm' group are usually administrators, and this group permission allows them to read log files without having to **su**. The 'staff' group are usually help-desk/junior sysadmins, allowing them to work in `/usr/local` and create directories in `/home`.

Why is there a new group when I add a new user? (or Why does Debian give each user one group?)

The default behavior in Debian is that each user has its own, private group. The traditional UN*X scheme assigned all users to the `users` group. Additional groups were created and used to restrict access to shared files associated with different project directories. Managing files became difficult when a single user worked on multiple projects because when someone created a file, it was associated with the primary group to which they belong (e.g. 'users').

Debian's scheme solves this problem by assigning each user to their own group; so that with a proper umask (0002) and the SETGID bit set on a given project directory, the correct group is automatically assigned to files created in that directory. This makes it easier for people who work on multiple projects, because they will not have to change groups or umasks when working on shared files.

You can, however, change this behavior by modifying `/etc/adduser.conf`. Change the `USERGROUPS` variable to 'no', so that a new group is not created when a new user is created. Also, set `USERS_GID` to the GID of the users group which all users will belong to.

#####

#####

OpenBSD #####Debian GNU/Linux ##### (#####)
#####)#####?

There has been much discussion on Debian mailing lists (both at `debian-devel` and at `debian-security`) regarding which is the better approach for a standard installation. However, as of this writing (March 2002), there still isn't a consensus.

Can I remove inetd?

Inetd ##### netbase ##### (netkit-inetd) #####inetd #####
(#####)# equivs

111 #####?

111 ##### sunrpc # portmapper ##### Debian ##### base #####
RPC ##### NFS ##### #Securing RPC
services# #####

In versions of the portmap package later than 5-5 you can actually have the portmapper installed but listening only on localhost (by modifying `/etc/default/portmap`)

What use is `identd` (port 113) for?

`Identd` service is an authentication service that identifies the owner of a specific TCP/IP connection to the remote server accepting the connection. Typically, when a user connects to a remote host, **`inetd`** on the remote host sends back a query to port 113 to find the owner information. It is often used by mail, FTP and IRC servers, and can also be used to track down which user in your local system is attacking a remote system.

There has been extensive discussion on the security of **`identd`** (See <http://lists.debian.org/debian-security/2001/08/msg00297.html>). In general, **`identd`** is more helpful on a multi-user system than on a single user workstation. If you don't have a use for it, disable it, so that you are not leaving a service open to the outside world. If you decide to firewall the `identd` port, *please* use a reject policy and not a deny policy, otherwise a connection to a server utilizing **`identd`** will hang until a timeout expires (see http://logi.cc/linux/reject_or_deny.php3).

I have services using port 1 and 6, what are they and how can I remove them?

If you have run the command `netstat -an` and receive:

```
Active Internet connections (servers and established)
Proto Recv-Q Send-Q Local Address           Foreign Address         State
PID/Program name
raw      0      0 0.0.0.0:1               0.0.0.0:*               7
-
raw      0      0 0.0.0.0:6               0.0.0.0:*               7
-
```

You are *not* seeing processes listening on TCP/UDP port 1 and 6. In fact, you are seeing a process listening on a *raw* socket for protocols 1 (ICMP) and 6 (TCP). Such behavior is common to both legitimate software like intrusion detection systems, such as `iplogger` and `portsentry`, but some trojans have also been known to use them. If you have the mentioned packages simply remove them to close the port. If you do not, try `netstat's -p` (process) option to see which process is running these listeners.

I found the port XYZ open, can I close it?

```
#####
#####
### inetd
(#Disabling inetd or its services# #####) #####
##### (inetd #####) #####
```

Will removing services from `/etc/services` help secure my box?

```
###/etc/services ##### (###) #####
##### /etc/services # #####
##### # #####
```

Common security issues

#####!

```
##### Lilo # BIOS #####
```

```
##### BIOS ### (#####) ##### BIOS #####  
##### BIOS #####
```

Once you have enabled booting from a CD-ROM or diskette enable, try the following:

- #####
- ##### (Alt + F2)
- /root #####
- /etc/shadow ##### (Debian 2.2 ##### **ae** #####Debian 3.0 ## **vi** ## **nano-tiny** ##
#####) #####:

```
root:asdfjl290341274075:XXXX:X:XXXX:X::: (X=any number)
```

```
#####:
```

```
root::XXXX:X:XXXX:X:::
```

This will remove the forgotten root password, contained in the first colon separated field after the user name. Save the file, reboot the system and login with root using an empty password. Remember to reset the password. This will work unless you have configured the system more tightly, i.e. if you have not allowed users to have null passwords or not allowed root to login from the console.

```
#####LILO # ##### root # #####  
## lilo ##### ramdisk ### / ##### /etc/lilo.conf #####  
#####
```

Once LILO is unrestricted, try the following:

- ##### BIOS ##### Alt #####LILO #####
- Type `linux single`, `linux init=/bin/sh` or `linux 1` at the prompt.
- ##### (#####)
- Re-mount read/write the root (/) partition, using the mount command.

```
# mount -o remount,rw /
```

- ##### **passwd** ##### (#####)

How do I accomplish setting up a service for my users without giving out shell accounts?

For example, if you want to set up a POP service, you don't need to set up a user account for each user accessing it. It's best to set up directory-based authentication through an external service (like Radius, LDAP or an SQL database). Just install the appropriate PAM library (libpam-radius-auth, libpam-ldap, libpam-pgsql or libpam-mysql), read the documentation (for starters, see #####: PAM#) and configure the PAM-enabled service to use the back end you have chosen. This is done by editing the files under /etc/pam.d/ for your service and modifying the

```
auth required pam_unix_auth.so shadow nullok use_first_pass
```

to, for example, ldap:

```
auth required pam_ldap.so
```

In the case of LDAP directories, some services provide LDAP schemas to be included in your directory that are required in order to use LDAP authentication. If you are using a relational database, a useful trick is to use the *where* clause when configuring the PAM modules. For example, if you have a database with the following table attributes:

```
(user_id, user_name, realname, shell, password, UID, GID, homedir, sys, pop, ima
```

By making the services attributes boolean fields, you can use them to enable or disable access to the different services just by inserting the appropriate lines in the following files:

- /etc/pam.d/imap:where=imap=1.
- /etc/pam.d/qpopper:where=pop=1.
- /etc/nss-mysql*.conf:users.where_clause = user.sys = 1;.
- /etc/proftpd.conf: SQLWhereClause "ftp=1".

My system is vulnerable! (Are you sure?)

Vulnerability assessment scanner X says my Debian system is vulnerable!

Many vulnerability assessment scanners give false positives when used on Debian systems, since they only use version checks to determine if a given software package is vulnerable, but do not really test the security vulnerability itself. Since Debian does not change software versions when fixing a package (many times the fix made for newer releases is back ported), some tools tend to think that an updated Debian system is vulnerable when it is not.

If you think your system is up to date with security patches, you might want to use the cross references to security vulnerability databases published with the DSAs (see #Debian Security Advisories#) to weed out false positives, if the tool you are using includes CVE references.

I've seen an attack in my system's logs. Is my system compromised?

A trace of an attack does not always mean that your system has been compromised, and you should take the usual steps to determine if the system is indeed compromised (see 11#*After the compromise (incident response)*). Even if your system was not vulnerable to the attack that was logged, a determined attacker might have used some other vulnerability besides the ones you have detected.

I have found strange 'MARK' lines in my logs: Am I compromised?

You might find the following lines in your system logs:

```
Dec 30 07:33:36 debian -- MARK --
Dec 30 07:53:36 debian -- MARK --
Dec 30 08:13:36 debian -- MARK --
```

This does not indicate any kind of compromise, and users changing between Debian releases might find it strange. If your system does not have high loads (or many active services), these lines might appear throughout your logs. This is an indication that your **syslogd** daemon is running properly. From syslogd(8):

```
-m interval
    The syslogd logs a mark timestamp regularly. The
    default interval between two -- MARK -- lines is 20
    minutes. This can be changed with this option.
    Setting the interval to zero turns it off entirely.
```

I found users using 'su' in my logs: Am I compromised?

```
#####:
```

```
Apr  1 09:25:01 server su[30315]: + ??? root-nobody
Apr  1 09:25:01 server PAM_unix[30315]: (su) session opened for user nobody by (
```

```
##### cron ##### (#### /etc/cron.daily/find # logrotate ##) ##### #
#####:
```

```
$ grep 25 /etc/crontab
25 9 * * * root test -e /usr/sbin/anacron || run-parts --report
/etc/cron.daily
$ grep nobody /etc/cron.daily/*
find:cd / && updatedb --localuser=nobody 2>/dev/null
```

I have found 'possible SYN flooding' in my logs: Am I under attack?

If you see entries like these in your logs:

```
May 1 12:35:25 linux kernel: possible SYN flooding on port X. Sending cookies.
May 1 12:36:25 linux kernel: possible SYN flooding on port X. Sending cookies.
May 1 12:37:25 linux kernel: possible SYN flooding on port X. Sending cookies.
May 1 13:43:11 linux kernel: possible SYN flooding on port X. Sending cookies.
```

Check if there is a high number of connections to the server using **netstat**, for example:

```
linux:~# netstat -ant | grep SYN_RECV | wc -l
9000
```

This is an indication of a denial of service (DoS) attack against your system's X port (most likely against a public service such as a web server or mail server). You should activate TCP syncookies in your kernel, see [#Configuring syncookies#](#). Note, however, that a DoS attack might flood your network even if you can stop it from crashing your systems (due to file descriptors being depleted, the system might become unresponsive until the TCP connections timeout). The only effective way to stop this attack is to contact your network provider.

I have found strange root sessions in my logs: Am I compromised?

You might see these kind of entries in your `/var/log/auth.log` file:

```
May 2 11:55:02 linux PAM_unix[1477]: (cron) session closed for user root
May 2 11:55:02 linux PAM_unix[1476]: (cron) session closed for user root
May 2 12:00:01 linux PAM_unix[1536]: (cron) session opened for user root by
(UID=0)
May 2 12:00:02 linux PAM_unix[1536]: (cron) session closed for user root
```

These are due to a **cron** job being executed (in this example, every five minutes). To determine which program is responsible for these jobs, check entries under: `/etc/crontab`, `/etc/cron.d`, `/etc/crond.daily` and root's crontab under `/var/spool/cron/crontabs`.

#####?

There are several steps you might want to take in case of a break-in:

- Check if your system is up to date with security patches for published vulnerabilities. If your system is vulnerable, the chances that the system is in fact compromised are increased. The chances increase further if the vulnerability has been known for a while, since there is usually more activity related to older vulnerabilities. Here is a link to <http://www.sans.org/top20/>.
- Read this document, especially the 11#*After the compromise (incident response)* section.
- Ask for assistance. You might use the `debian-security` mailing list and ask for advice on how to recover/patch your system.
- Notify your local <http://www.cert.org> (if it exists, otherwise you may want to consider contacting CERT directly). This might or might not help you, but, at the very least, it will inform CERT of ongoing attacks. This information is very valuable in determining which tools and attacks are being used by the *blackhat* community.

#####?

```
##### (#####)##### (#####)##### # traceroute#whois ##### (#
###) #####
#####? #####?
```

Debian ##### X #####?

```
##### (Bugtraq ##) # #####Debian Security Team #
##### http://security.debian.org #####
###
```

If no information seems to be published, please send e-mail about the affected package(s), as well as a detailed description of the vulnerability (proof of concept code is also OK), to <mailto:team@security.debian.org>. This will get you in touch with Debian's security team.

#####!

```
#####
#####
```

(##### - ## - Debian #####) ##### Debian Security Advisory #####
#####

#####

Proftpd

DenyFilter *.* / ##### http://www.proftpd.org/critbugs.html #####

After installing portsenry, there are a lot of ports open.

That's just the way **portsentry** works. It opens about twenty unused ports to try to detect port scans.

Debian security team

The security team keeps its list of Frequently Asked Questions at the <http://www.debian.org/security/faq>. Please refer to that web page for up to date information.

##A

3-19.2 Sun May 19 2024 HolgerWansing<hwansing@mailbox.org>
Translation files synchronised with XML sources 3-19
3-19.1 Mon May 1 2017 MarcosFouces<marcos.fouces@gmail.com>
Translation files synchronised with XML sources 3-19
3-19 April 2017 MarcosFouces<marcos.fouces@gmail.com>
Migrate to Docbook XML.
Build with Publican. No longer use custom Makefile.
Migrate svn repository to git.
Import chinese, italian, spanish, portuguese, japanese, russian, french and german translations to PO format.
3-18 February 2015 ThijsKinkhorst<thijs@debian.org>
Clarify FAQ on raw sockets.
Update section 4.5 on GRUB2.
Replace example postrm user removal code with advice to use deluser/delgroup --system
3-17 January 2015 Thijs
Kinkhorst<thijs@debian.org>
Remove mention of MD5 shadow passwords.
Do not recommend dselect for holding packages.
No longer include the Security Team FAQ verbatim, because it duplicates information documented elsewhere and is hence perpetually out of date.
Update section on restart after library upgrades to mention needrestart.
Avoid gender-specific language. Patch by Myriam.
Use LSB headers for firewall script. Patch by Dominic Walden.
3-16 January 2013 JavierFernández-Sanguino
Peña.<jfs@debian.org>
Indicate that the document is not updated with latest versions.
Update pointers to current location of sources.
Update information on security updates for newer releases.
Point information for Developers to online sources instead of keeping the information in the document, to prevent duplication.
Extend the information regarding securing console access, including limiting the Magic SysRq key.
Update the information related to PAM modules including how to restrict console logins, use cracklib and use the features available in /etc/pam.d/login. Remove the references to obsolete variables in /etc/login.defs.
Reference some of the PAM modules available to use double factor authentication, for administrators that want to stop using passwords altogether.
Fix shell script example in Appendix.
Fix reference errors.
Point to the Basille sourceforge project instead of the bastille-unix.org site as it is not responding.
3-15 December 2010 JavierFernández-Sanguino
Peña<jfs@debian.org>
Change reference to Log Analysis' website as this is no longer available.
3-14 March 2009 JavierFernández-Sanguino
Peña<jfs@debian.org>
Change the section related to choosing a filesystem: note that ext3 is now the default.
Change the name of the packages related to enigma to reflect naming changes introduced in Debian.
3-13 February 2008 JavierFernández-Sanguino
Peña<jfs@debian.org>

Change URLs pointing to Bastille Linux to www.Bastille-UNIX.org since the domain has been <http://bastille-linux.sourceforge.net/press-release-newname.html>.

Fix pointers to Linux Ramen and Lion worms.

Use linux-image in the examples instead of the (old) kernel-image packages.

Fix typos spotted by Francesco Poli.

3-12

August 2007

JavierFernández-Sanguino

Peña<jfs@debian.org>

Update the information related to security updates. Drop the text talking about Tiger and include information on the update-notifier and adept tools (for Desktops) as well as debsecan. Also include some pointers to other tools available.

Divide the firewall applications based on target users and add fireflie to the Desktop firewall applications list.

Remove references to libsafe, it's not in the archive any longer (was removed January 2006).

Fix the location of syslog's configuration, thanks to John Talbut.

3-11

January 2007

JavierFernández-Sanguino

Peña<jfs@debian.org>

Thanks go to Francesco Poli for his extensive review of the document.

Remove most references to the woody release as it is no longer available (in the archive) and security support for it is no longer available.

Describe how to restrict users so that they can only do file transfers.

Added a note regarding the debian-private declassification decision.

Updated link of incident handling guides.

Added a note saying that development tools (compilers, etc.) are not installed now in the default 'etch' installation.

Added a note saying that development tools (compilers, etc.) are not installed now in the default 'etch' installation.

Fix references to the master security server.

Add pointers to additional APT-secure documentation.

Improve the description of APT signatures.

Comment out some things which are not yet final related to the mirror's official public keys.

Fixed name of the Debian Testing Security Team.

Remove reference to sarge in an example.

Update the antivirus section, clamav is now available on the release. Also mention the f-prot installer.

Removes all references to freeswan as it is obsolete.

Describe issues related to ruleset changes to the firewall if done remotely and provide some tips (in footnotes).

Update the information related to the IDS installation, mention BASE and the need to setup a logging database.

Rewrite the "running bind as a non-root user" section as this no longer applies to Bind9. Also remove the reference to the init.d script since the changes need to be done through /etc/default.

Remove the obsolete way to setup iptables rulesets as woody is no longer supported.

Revert the advice regarding LOG_UNKFAIL_ENAB it should be set to 'no' (as per default).

Added more information related to updating the system with desktop tools (including update-notifier) and describe aptitude usage to update the system. Also note that dselect is deprecated.

Updated the contents of the FAQ and remove redundant paragraphs.

Review and update the section related to forensic analysis of malware.

Remove or fix some dead links.

Fix many typos and gramatical errors reported by Francesco Poli.

3-10

November 2006

JavierFernández-Sanguino

Peña<jfs@debian.org>

Provide examples using apt-cache's rdepends as suggested by Ozer Sarilar.

Fix location of Squid's user's manual because of its relocation as notified by Oskar Pearson (its maintainer).

Fix information regarding umask, it's logins.defs (and not limits.conf) where this can be configured for all login connections. Also state what is Debian's default and what would be a more restrictive value for both users and root. Thanks to Reinhard Tartler for spotting the bug.

3-9

October 2006

JavierFernández-Sanguino
Peña<jfs@debian.org>

Add information on how to track security vulnerabilities and add references to the Debian Testing Security Tracker.

Add more information on the security support for testing.

Fix a large number of typos with a patch provided by Simon Brandmair.

Added section on how to disable root prompt on initramfs provided by Max Attems.

Remove references to queso.

Note that testing is now security-supported in the introduction.

3-8

July 2006

JavierFernández-Sanguino
Peña<jfs@debian.org>

Rewrote the information on how to setup ssh chroots to clarify the different options available, thank to Bruce Park for bringing up the different mistakes in this appendix.

Fix lsof call as suggested by Christophe Sahut.

Include patches for typo fixes from Uwe Hermann.

Fix typo in reference spotted by Moritz Naumann.

3-7

April 2006

JavierFernández-Sanguino
Peña<jfs@debian.org>

Add a section on Debian Developer's best practices for security.

Ammended firewall script with comments from WhiteGhost.

3-6

March 2006

JavierFernández-Sanguino
Peña<jfs@debian.org>

Included a patch from Thomas Sjögren which describes that noexec works as expected with "new" kernels, adds information regarding tempfile handling, and some new pointers to external documentation. Add a pointer to Dan Farmer's and Wietse Venema's forensic discovery web site, as suggested by Freek Dijkstra, and expanded a little bit the forensic analysis section with more pointers.

Fixed URL of Italy's CERT, thanks to Christoph Auer.

Reuse Joey Hess' information at the wiki on secure apt and introduce it in the infrastructure section.

Review sections referring to old versions (woody or potato).

Fix some cosmetic issues with patch from Simon Brandmair.

Included patches from Carlo Perassi: acl patches are obsolete, openwall patches are obsolete too, removed fixme notes about 2.2 and 2.4 series kernels, hap is obsolete (and not present in WNPP), remove references to Immunix (StackGuard is now in Novell's hands), and fix a FIXME about the use of bsign or elfsign.

Updated references to SELinux web pages to point to the Wiki (currently the most up to date source of information).

Include file tags and make a more consistent use of "MD5 sum" with a patch from Jens Seidel.

Patch from Joost van Baal improving the information on the firewall section (pointing to the wiki instead of listing all firewall packages available) (Closes: #339865).

Review the FAQ section on vulnerability stats, thanks to Carlos Galisteo de Cabo for pointing out that it was out of date.

Use the quote from the Social Contract 1.1 instead of 1.0 as suggested by Francesco Poli.

3-5

November 2005

JavierFernández-Sanguino
Peña<jfs@debian.org>

Note on the SSH section that the chroot will not work if using the nodev option in the partition and point to the latest ssh packages with the chroot patch, thanks to Lutz Broedel for pointing these issues out.

Fix typo spotted by Marcos Roberto Greiner (md5sum should be sha1sum in code snippet).

Included Jens Seidel's patch fixing a number of package names and typos.

Slightly update of the tools section, removed tools no longer available and added some new ones.

Rewrite parts of the section related to where to find this document and what formats are available (the website does provide a PDF version). Also note that copies on other sites and translations might be obsolete (many of the Google hits for the manual in other sites are actually out of date).

-
- ## 3-4 August-September 2005 JavierFernández-Sanguino
Peña<jfs@debian.org>
- Improved the after installation security enhancements related to kernel configuration for network level protection with a sysctl.conf file provided by Will Moy.
Improved the gdm section, thanks to Simon Brandmair.
Typo fixes from Frédéric Bothamy and Simon Brandmair.
Improvements in the after installation sections related to how to generate the MD5 (or SHA-1) sums of binaries for periodic review.
Updated the after installation sections regarding checksecurity configuration (was out of date).
- ## 3-3 June 2005 JavierFernández-Sanguino
Peña<jfs@debian.org>
- Added a code snippet to use grep-available to generate the list of packages depending on Perl. As requested in #302470.
Rewrite of the section on network services (which ones are installed and how to disable them).
Added more information to the honeypot deployment section mentioning useful Debian packages.
- ## 3-2 March 2005 JavierFernández-Sanguino
Peña<jfs@debian.org>
- Expanded the PAM configuration limits section.
Added information on how to use pam_chroot for openssh (based on pam_chroot's README).
Fixed some minor issues reported by Dan Jacobson.
Updated the kernel patches information partially based on a patch from Carlo Perassi and also by adding deprecation notes and new kernel patches available (adamantix).
Included patch from Simon Brandmair that fixes a sentence related to login failures in terminal.
Added Mozilla/Thunderbird to the valid GPG agents as suggested by Kápolnai Richard.
Expanded the section on security updates mentioning library and kernel updates and how to detect when services need to be restarted.
Rewrote the firewall section, moved the information that applies to woody down and expand the other sections including some information on how to manually set the firewall (with a sample script) and how to test the firewall configuration.
Added some information preparing for the 3.1 release.
Added more detailed information on kernel upgrades, specifically targeted at those that used the old installation system.
Added a small section on the experimental apt 0.6 release which provides package signing checks. Moved old content to the section and also added a pointer to changes made in aptitude.
Typo fixes spotted by Frédéric Bothamy.
- ## 3-1 January 2005 JavierFernández-Sanguino
Peña<jfs@debian.org>
- Added clarification to ro /usr with patch from Joost van Baal.
Apply patch from Jens Seidel fixing many typos.
FreeSWAN is dead, long live OpenSWAN.
Added information on restricting access to RPC services (when they cannot be disabled) also included patch provided by Aarre Laakso.
Update aj's apt-check-sigs script.
Apply patch Carlo Perassi fixing URLs.
Apply patch from Davor Ocelic fixing many errors, typos, urls, grammar and FIXMEs. Also adds some additional information to some sections.
Rewrote the section on user auditing, highlight the usage of script which does not have some of the issues associated to shell history.
- ## 3-0 December 2004 JavierFernández-Sanguino
Peña<jfs@debian.org>
- Rewrote the user-auditing information and include examples on how to use script.
- ## 2-99 March 2004 JavierFernández-Sanguino
Peña<jfs@debian.org>
- Added information on references in DSAs and CVE-Compatibility.

Added information on apt 0.6 (apt-secure merge in experimental).
 Fixed location of Chroot daemons HOWTO as suggested by Shuying Wang.
 Changed APACHECTL line in the Apache chroot example (even if its not used at all) as suggested by Leonard Norrgard.

Added a footnote regarding hardlink attacks if partitions are not setup properly.
 Added some missing steps in order to run bind as named as provided by Jeffrey Prosa.
 Added notes about Nessus and Snort out-of-dateness in woody and availability of backported packages.
 Added a chapter regarding periodic integrity test checks.
 Clarified the status of testing regarding security updates (Debian bug 233955).
 Added more information regarding expected contents in securetty (since it's kernel specific).
 Added pointer to snoopylogger (Debian bug 179409).
 Added reference to guarddog (Debian bug 170710).

apt-ftarchive is in apt-utils, not in apt (thanks to Emmanuel Chantreau for pointing this out).

Removed jvirus from AV list.

2-98 JavierFernández-Sanguino
 Peña<jfs@debian.org>

Fixed URL as suggested by Frank Lichtenheld.
 Fixed PermitRootLogin typo as suggested by Stefan Lindenau.

2-97 September 2003 JavierFernández-Sanguino
 Peña<jfs@debian.org>

Added those that have made the most significant contributions to this manual (please mail me if you think you should be in the list and are not).

Added some blurb about FIXME/TODOs.

Moved the information on security updates to the beginning of the section as suggested by Elliott Mitchell.
 Added gsecurity to the list of kernel-patches for security but added a footnote on the current issues with it as suggested by Elliott Mitchell.

Removed loops (echo to 'all') in the kernel's network security script as suggested by Elliott Mitchell.

Added more (up-to-date) information in the antivirus section.

Rewrote the buffer overflow protection section and added more information on patches to the compiler to enable this kind of protection.

2-96 August 2003 JavierFernández-Sanguino
 Peña<jfs@debian.org>

Removed (and then re-added) appendix on chrooting Apache. The appendix is now dual-licensed.

2-95 June 2003 JavierFernández-Sanguino
 Peña<jfs@debian.org>

Fixed typos spotted by Leonard Norrgard.

Added a section on how to contact CERT for incident handling (11#*After the compromise (incident response)*).

More information on setting up a Squid proxy.

Added a pointer and removed a FIXME thanks to Helge H. F.

Fixed a typo (save_inactive) spotted by Philippe Faes.

Fixed several typos spotted by Jaime Robles.

2-94 April 2003 JavierFernández-Sanguino
 Peña<jfs@debian.org>

Following Maciej Stachura's suggestions I've expanded the section on limiting users.

Fixed typo spotted by Wolfgang Nolte.

Fixed links with patch contributed by Ruben Leote Mendes

Added a link to David Wheeler's excellent document on the footnote about counting security vulnerabilities.

2-93 March 2003 FrédéricSchütz<schutz@mathgen.ch>

rewrote entirely the section of ext2 attributes (Isattr/chattr)

2-92 February 2003 JavierFernández-Sanguino
 Peña<jfs@debian.org>,
 FrédéricSchütz<schutz@mathgen.ch>

Merge section 9.3 ("useful kernel patches") into section 4.13 ("Adding kernel patches"), and added some content.

Added a few more TODOs.

Added information on how to manually check for updates and also about cron-apt. That way Tiger is not perceived as the only way to do automatic update checks.

Slightly rewrite of the section on executing a security updates due to Jean-Marc Ranger comments.

Added a note on Debian's installation (which will suggest the user to execute a security update right after installation).

2-91

January/February 2003

JavierFernández-Sanguino
Peña<jfs@debian.org>

Added a patch contributed by Frédéric Schütz.

Added a few more references on capabilities thanks to Frédéric.

Slight changes in the bind section adding a reference to BIND's 9 online documentation and proper references in the first area (Hi Pedro!).

Fixed the changelog date - new year :-).

Added a reference to Colin's articles for the TODOs.

Removed reference to old ssh+chroot patches.

More patches from Carlo Perassi.

Typo fixes (recursive in Bind is recursion), pointed out by Maik Holtkamp.

2-9

December 2002

JavierFernández-Sanguino
Peña<jfs@debian.org>

Reorganized the information on chroot (merged two sections, it didn't make much sense to have them separated).

Added the notes on chrooting Apache provided by Alexandre Ratti.

Applied patches contributed by Guillermo Jover.

2-8

JavierFernández-Sanguino
Peña<jfs@debian.org>

Applied patches from Carlo Perassi, fixes include: re-wrapping the lines, URL fixes, and fixed some FIXMEs.

Updated the contents of the Debian security team FAQ.

Added a link to the Debian security team FAQ and the Debian Developer's reference, the duplicated sections might (just might) be removed in the future.

Fixed the hand-made auditing section with comments from Michal Zielinski.

Added links to wordlists (contributed by Carlo Perassi).

Fixed some typos (still many around).

Fixed TDP links as suggested by John Summerfield.

2-7

JavierFernández-Sanguino
Peña<jfs@debian.org>

Some typo fixes contributed by Tuyen Dinh, Bartek Golenko and Daniel K. Gebhart.

Note regarding /dev/kmem rootkits contributed by Laurent Bonnaud.

Fixed typos and FIXMEs contributed by Carlo Perassi.

2-6

September 2002

CrisTillman<tillman@voicetrak.com>

Changed around to improve grammar/spelling.

s/host.deny/hosts.deny/ (1 place).

Applied Larry Holish's patch (quite big, fixes a lot of FIXMEs).

2-5.1

September 2002

JavierFernández-Sanguino
Peña<jfs@debian.org>

Fixed minor typos submitted by Thiemo Nagel.

Added a footnote suggested by Thiemo Nagel.

Fixed an URL link.

2-5.0

August 2002

JavierFernández-Sanguino
Peña<jfs@debian.org>

Applied a patch contributed by Philippe Gaspar regarding the Squid which also kills a FIXME.

Yet another FAQ item regarding service banners taken from the debian-security mailing list (thread "Telnet information" started 26th July 2002).

Added a note regarding use of CVE cross references in the *How much time does the Debian security team...* FAQ item.

Added a new section regarding ARP attacks contributed by Arnaud "Arhuman" Assad.

New FAQ item regarding dmesg and console login by the kernel.

Small tidbits of information to the signature-checking issues in packages (it seems to not have gotten past beta release).

New FAQ item regarding vulnerability assessment tools false positives.

Added new sections to the chapter that contains information on package signatures and reorganized it as a new *Debian Security Infrastructure* chapter.

New FAQ item regarding Debian vs. other Linux distributions.

New section on mail user agents with GPG/PGP functionality in the security tools chapter.

Clarified how to enable MD5 passwords in woody, added a pointer to PAM as well as a note regarding the max definition in PAM.

Added a new appendix on how to create chroot environments (after fiddling a bit with makejail and fixing, as well, some of its bugs), integrated duplicate information in all the appendix.

Added some more information regarding SSH chrooting and its impact on secure file transfers. Some information has been retrieved from the debian-security mailing list (June 2002 thread: *secure file transfers*).

New sections on how to do automatic updates on Debian systems as well as the caveats of using testing or unstable regarding security updates.

New section regarding keeping up to date with security patches in the *Before compromise* section as well as a new section about the debian-security-announce mailing list.

Added information on how to automatically generate strong passwords.

New section regarding login of idle users.

Reorganized the securing mail server section based on the *Secure/hardened/minimal Debian (or "Why is the base system the way it is?")* thread on the debian-security mailing list (May 2002).

Reorganized the section on kernel network parameters, with information provided in the debian-security mailing list (May 2002, *syn flood attacked?* thread) and added a new FAQ item as well.

New section on how to check users passwords and which packages to install for this.

New section on PPTP encryption with Microsoft clients discussed in the debian-security mailing list (April 2002).

Added a new section describing what problems are there when binding any given service to a specific IP address, this information was written based on the Bugtraq mailing list in the thread: *Linux kernel 2.4 "weak end host" issue (previously discussed on debian-security as "arp problem")* (started on May 9th 2002 by Felix von Leitner).

Added information on ssh protocol version 2.

Added two subsections related to Apache secure configuration (the things specific to Debian, that is).

Added a new FAQ related to raw sockets, one related to /root, an item related to users' groups and another one related to log and configuration files permissions.

Added a pointer to a bug in libpam-cracklib that might still be open... (need to check).

Added more information regarding forensics analysis (pending more information on packet inspection tools such as tcpflow).

Changed the "what should I do regarding compromise" into a bullet list and included some more stuff.

Added some information on how to set up the Xscreensaver to lock the screen automatically after the configured timeout.

Added a note related to the utilities you should not install in the system. Included a note regarding Perl and why it cannot be easily removed in Debian. The idea came after reading Intersect's documents regarding Linux hardening.

Added information on lvm and journalling file systems, ext3 recommended. The information there might be too generic, however.

Added a link to the online text version (check).

Added some more stuff to the information on firewalling the local system, triggered by a comment made by Hubert Chan in the mailing list.

Added more information on PAM limits and pointers to Kurt Seifried's documents (related to a post by him to Bugtraq on April 4th 2002 answering a person that had ``discovered" a vulnerability in Debian GNU/Linux related to resource starvation).

As suggested by Julián Muñoz, provided more information on the default Debian umask and what a user can access if given a shell in the system (scary, huh?).

Included a note in the BIOS password section due to a comment from Andreas Wohlfeld.

Included patches provided by Alfred E. Heggstad fixing many of the typos still present in the document.

Added a pointer to the changelog in the Credits section since most people who contribute are listed here (and not there).

Added a few more notes to the chatr section and a new section after installation talking about system snapshots. Both ideas were contributed by Kurt Pomeroy.

Added a new section after installation just to remind users to change the boot-up sequence.

Added some more TODO items provided by Korn Andras.

Added a pointer to the NIST's guidelines on how to secure DNS provided by Daniel Quinlan.

Added a small paragraph regarding Debian's SSL certificates infrastructure.

Added Daniel Quinlan's suggestions regarding ssh authentication and exim's relay configuration.

Added more information regarding securing bind including changes suggested by Daniel Quinlan and an appendix with a script to make some of the changes commented on in that section.

Added a pointer to another item regarding Bind chrooting (needs to be merged).

Added a one liner contributed by Cristian Ionescu-Idbohrn to retrieve packages with tcpwrappers support.

Added a little bit more info on Debian's default PAM setup.

Included a FAQ question about using PAM to provide services without shell accounts.

Moved two FAQ items to another section and added a new FAQ regarding attack detection (and compromised systems).

Included information on how to set up a bridge firewall (including a sample Appendix). Thanks to Francois Bayart who sent this to me in March.

Added a FAQ regarding the syslogd's *MARK heartbeat* from a question answered by Noah Meyerhans and Alain Tesio in December 2001.

Included information on buffer overflow protection as well as some information on kernel patches.

Added more information (and reorganized) the firewall section. Updated the information regarding the iptables package and the firewall generators available.

Reorganized the information regarding log checking, moved logcheck information from host intrusion detection to that section.

Added some information on how to prepare a static package for bind for chrooting (untested).

Added a FAQ item regarding some specific servers/services (could be expanded with some of the recommendations from the debian-security list).

Added some information on RPC services (and when it's necessary).

Added some more information on capabilities (and what lcap does). Is there any good documentation on this? I haven't found any documentation on my 2.4 kernel.

Fixed some typos.

2-4

June 2002

JavierFernández-Sanguino
Peña<jfs@debian.org>

Rewritten part of the BIOS section.

2-3.1

April 2002

JavierFernández-Sanguino
Peña<jfs@debian.org>

Wrapped most file locations with the file tag.

Fixed typo noticed by Edi Stojicevi.

Slightly changed the remote audit tools section.

Added some todo items.

Added more information regarding printers and cups config file (taken from a thread on debian-security).

Added a patch submitted by Jesus Climent regarding access of valid system users to Proftpd when configured as anonymous server.

Small change on partition schemes for the special case of mail servers.

Added Hacking Linux Exposed to the books section.

Fixed directory typo noticed by Eduardo Pérez Ureta.

Fixed /etc/ssh typo in checklist noticed by Edi Stojicevi.

2-3.0

April 2002

JavierFernández-Sanguino

Peña<jfs@debian.org>

Fixed location of dpkg conffile.

Remove Alexander from contact information.

Added alternate mail address.

Fixed Alexander mail address (even if commented out).

Fixed location of release keys (thanks to Pedro Zorzenon for pointing this out).

2-2

April 2002

JavierFernández-Sanguino

Peña<jfs@debian.org>

Fixed typos, thanks to Jamin W. Collins.

Added a reference to apt-extracttemplate manpage (documents the APT::ExtractTemplate config).

Added section about restricted SSH. Information based on that posted by Mark Janssen, Christian G. Warden and Emmanuel Lacour on the debian-security mailing list.

Added information on antivirus software.

Added a FAQ: su logs due to the cron running as root.

2-1

April 2002

JavierFernández-Sanguino

Peña<jfs@debian.org>

Changed FIXME from lshell thanks to Oohara Yuuma.

Added package to sXid and removed comment since it **is** available.

Fixed a number of typos discovered by Oohara Yuuma.

ACID is now available in Debian (in the acidlab package) thanks to Oohara Yuuma for noticing.

Fixed LinuxSecurity links (thanks to Dave Wreski for telling).

2-0

March 2002

JavierFernández-Sanguino

Peña<jfs@debian.org>

Converted the HOWTO into a Manual (now I can properly say RTFM).

Added more information regarding tcp wrappers and Debian (now many services are compiled with support for them so it's no longer an inetd issue).

Clarified the information on disabling services to make it more consistent (rpc info still referred to update-rc.d).

Added small note on lprng.

Added some more info on compromised servers (still very rough).

Fixed typos reported by Mark Bucciarelli.

Added some more steps in password recovery to cover the cases when the admin has set paranoid-mode=on.

Added some information to set paranoid-mode=on when login in console.

New paragraph to introduce service configuration.

Reorganized the *After installation* section so it is more broken up into several issues and it's easier to read.

Wrote information on how to set up firewalls with the standard Debian 3.0 setup (iptables package).

Small paragraph explaining why installing connected to the Internet is not a good idea and how to avoid this using Debian tools.

Small paragraph on timely patching referencing to IEEE paper.

Appendix on how to set up a Debian snort box, based on what Vladimir sent to the debian-security mailing list (September 3rd 2001).

Information on how logcheck is set up in Debian and how it can be used to set up HIDS.

Information on user accounting and profile analysis.

Included apt.conf configuration for read-only /usr copied from Olaf Meeuwissen's post to the debian-security mailing list.

New section on VPN with some pointers and the packages available in Debian (needs content on how to set up the VPNs and Debian-specific issues), based on Jaroslaw Tabor's and Samuli Suonpaa's post to debian-security.

1-9 October 2001 JavierFernández-Sanguino
Peña<jfs@debian.org>

Added patch to fix misspellings and some new information (contributed by Yotam Rubin).
Added references to other online (and offline) documentation both in a section (see #####
#####) by itself and inline in some sections.
Added some information on configuring Bind options to restrict access to the DNS server.
Added information on how to automatically harden a Debian system (regarding the harden package and
bastille).
Removed some done TODOs and added some new ones.

1-8 October 2001 JavierFernández-Sanguino
Peña<jfs@debian.org>

Added the default user/group list provided by Joey Hess to the debian-security mailing list.
Added information on LKM root-kits (#LKM - Loadable Kernel Modules#) contributed by Philippe Gaspar.
Added information on Proftpd contributed by Emmanuel Lacour.
Recovered the checklist Appendix from Era Eriksson.
Added some new TODO items and removed other fixed ones.
Manually included Era's patches since they were not all included in the previous version.

1-7 September 2001 JavierFernández-Sanguino
Peña<jfs@debian.org>,
EraEriksson<era@iki.fi>

Typo fixes and wording changes.
Minor changes to tags in order to keep on removing the tt tags and substitute prgn/package tags for them.

1-6 August 2001 JavierFernández-Sanguino
Peña<jfs@debian.org>

Added pointer to document as published in the DDP (should supersede the original in the near future).
Started a mini-FAQ (should be expanded) with some questions recovered from my mailbox.
Added general information to consider while securing.
Added a paragraph regarding local (incoming) mail delivery.
Added some pointers to more information.
Added information regarding the printing service.
Added a security hardening checklist.
Reorganized NIS and RPC information.
Added some notes taken while reading this document on my new Visor :).
Fixed some badly formatted lines.
Fixed some typos.
Added a Genius/Paranoia idea contributed by Gaby Schilders.

1-5 May 2001 JavierFernández-Sanguino
Peña<jfs@debian.org>,
JosipRodin<joy@debian.org>

Added paragraphs related to BIND and some FIXMEs.

1-4 May 2001 JavierFernández-Sanguino
Peña<jfs@debian.org>

Small setuid check paragraph
Various minor cleanups.
Found out how to use `sgml2txt -f` for the txt version.

1-3 March 2001 JavierFernández-Sanguino
Peña<jfs@debian.org>

Added a security update after installation paragraph.
Added a proftpd paragraph.
This time really wrote something about XDM, sorry for last time.

1-2 December 2000 JavierFernández-Sanguino
Peña<jfs@debian.org>

Lots of grammar corrections by James Treacy, new XDM paragraph.

## 1-1	December 2000	JavierFernández-Sanguino Peña<jfs@debian.org>
Typo fixes, miscellaneous additions.		
## 1-0	December 2000	JavierFernández-Sanguino Peña<jfs@debian.org>
Initial release.		

##B Appendix

#####

Below is a post-installation, step-by-step procedure for hardening a Debian 2.2 GNU/Linux system. This is one possible approach to such a procedure and is oriented toward the hardening of network services. It is included to show the entire process you might use during configuration. Also, see #####.

- Install the system, taking into account the information regarding partitioning included earlier in this document. After base installation, go into custom install. Do not select task packages.
- `dselect #####[I]install #####`
- ##### security.debian.org # #####
- `### quota##### lilo #####`
- Make a list of services currently running on your system. Try:

```
$ ps aux
$ netstat -pn -l -A inet
# /usr/sbin/lsof -i | grep LISTEN
```

```
3 ##### lsof-2.2 ##### (root #####)#lsof # LISTEN ### #####
#####
```

- In order to remove unnecessary services, first determine what package provides the service and how it is started. This can be accomplished by checking the program that listens in the socket. The following shell script, which uses the programs **lsof** and **dpkg**, does just that:

```
#!/bin/sh
# FIXME: this is quick and dirty; replace with a more robust script snippet
for i in `sudo lsof -i | grep LISTEN | cut -d " " -f 1 | sort -u` ; do
  pack=`dpkg -S $i |grep bin |cut -f 1 -d : | uniq`
  echo "Service $i is installed by $pack";
  init=`dpkg -L $pack |grep init.d/ `
  if [ ! -z "$init" ]; then
    echo "and is run by $init"
  fi
done
```

- Once you find any unwanted services, remove the associated package (with **dpkg --purge**), or disable the service from starting automatically at boot time using **update-rc.d** (see #####).
- For `inetd` services (launched by the superdaemon), check which services are enabled in `/etc/inetd.conf` using:

```
$ grep -v "^#" /etc/inetd.conf | sort -u
```

Then disable those services that are not needed by commenting out the line that includes them in `/etc/inetd.conf`, removing the package, or using **update-inetd**.

- ##### (/usr/sbin/tcpd #####) # #####/etc/hosts.allow # /etc/hosts.deny # #####
#####

- If the server uses more than one external interface, depending on the service, you may want to limit the service to listen on a specific interface. For example, if you want internal FTP access only, make the FTP daemon listen only on your management interface, not on all interfaces (i.e, 0.0.0.0:21).

- #####

```
# init 1
(... )
# init 2
```

- #####

- #####

- Use the following shell command to determine what user each available service is running as:

```
# for i in ` /usr/sbin/lsof -i |grep LISTEN |cut -d " " -f 1 |sort -u` ; \
> do user=`ps ef |grep $i |grep -v grep |cut -f 1 -d " "` ; \
> echo "Service $i is running as user $user"; done
```

Consider changing these services to a specific user/group and maybe **chroot**'ing them for increased security. You can do this by changing the /etc/init.d scripts which start the service. Most services in Debian use **start-stop-daemon**, which has options (`--change-uid` and `--chroot`) for accomplishing this. A word of warning regarding the **chroot**'ing of services: you may need to put all the files installed by the package (use `dpkg -L`) providing the service, as well as any packages it depends on, in the **chroot**'ed environment. Information about setting up a **chroot** environment for the **ssh** program can be found in `#Chroot environment for SSH#`.

- #####

- #####

- ##### (#####) # ##### (nessus #####) #####

- Install network and host intrusion measures like snort and logcheck.

- #####

#####:

- #####

- Re-check the installation with a new vulnerability assessment using a network scanner.

- Using a network scanner, check outbound connections from the system to an outside host and verify that unwanted connections do not find their way out.

FIXME: this procedure considers service hardening but not system hardening at the user level, include information regarding checking user permissions, SETUID files and freezing changes in the system using the ext2 file system.

#####

This appendix briefly reiterates points from other sections in this manual in a condensed checklist format. This is intended as a quick summary for someone who has already read the manual. There are other good checklists available, including Kurt Seifried's <http://seifried.org/security/os/linux/20020324-securing-linux-step-by-step.html> and http://www.cert.org/tech_tips/usc20_full.html.

FIXME: This is based on v1.4 of the manual and might need to be updated.

- #####
 - Enable a password in the BIOS.
 - Disable floppy/cdrom/... booting in the system's BIOS.
 - LILO # GRUB ##### (##### /etc/lilo.conf # /boot/grub/menu.lst)# LILO # GRUB #####
- #####
 - #####Debian #####
 - Set nosuid, noexec, nodev mount options in /etc/fstab on ext2/3 partitions that should not hold binaries such as /home or /tmp.
- #####
 - ## root #####
 - PAM #####
 - PAM # MD5 ##### (#####) /etc/pam.d/ ##### ##### pam.d # 2
#requisite###required#####
 - ##### root ##### /etc/pam.d/login ###
 - ### /etc/security/access.conf # ##### tty ##### root ##### #####
 - ##### pam_limits.so #####
 - /etc/pam.d/passwd #####. ##### (6 #####) md5 #####
 - ##### /etc/group # wheel ##### pam_wheel.so group=wheel ##### /etc/pam.d/su # #####
 - #####pam_listfile.so #####
 - /etc/pam.d/other #####
 - /etc/security/limits.conf ##### (PAM # ##### /etc/limits #####)
 - /etc/login.defs ##### MD5 ### PAM #####
 - Tighten up /etc/pam.d/login
- root ## ftp ##### /etc/ftpusers #####

- Disable network root login; use su(1) or sudo(1). (consider installing sudo)
- ##### PAM ###?
- #####
 - ##### (##### ##)
 - ##### (##### ##)
 - ##### (/var/log/{last,fail}log#Apache logs)
 - /etc/checksecurity.conf # setuid #####
 - chattr ##### immutable # ##### (ext2 #####)
 - ##### (##### ##)# debsums #####
 - #####?
 - ### CD #####?
 - #####?
- #####
 - ssh ##### (/etc/ssh # PermitRootLogin No# PermitEmptyPasswords No #####
#####)
 - Disable or remove **in.telnetd**, if installed
 - #####update-inetd --disable #### /etc/inetd.conf ##### (#####inetd #
#####xinetd # rlinetd ### #####)
 - Disable other gratuitous network services; ftp, DNS, WWW etc should not be running if you do not need them and monitor them regularly. In most cases mail should be running but configured for local delivery only.
 - #####Debian ## (#####) #####
 - #####
 - Configure firewall and tcpwrappers (i.e. hosts_access(5)); note trick for /etc/hosts.deny in text.
 - ftp ##### chroot ##### ftpd #####
 - X #####xhost ##### ssh ##### X ##### (-nolisten tcp # X #####
/etc/X11/xdm/xdm-config ## requestPort # 0 ##### XDMCP #####)
 - #####
 - IMAP ### POP ##### SSL ### ssh # ##### stunnel #####
 - ##### (/etc/syslog.conf)

- BIND#Sendmail ##### (chroot #####root #####)
- Install tiger or a similar network intrusion detection tool.
- Install snort or a similar network intrusion detection tool.v
- ##### NIS # RPC ##### (portmap #####)#
- #####
- #####
#####
- ##### (telnet#rsh ##### ftp#imap#http ##) #####
- SVGAlib #####
- ##### quota ###
- #####
- #####
- ##### -- /etc/apt/sources.list # http://security.debian.org/debian-security ###
(####)
- ### apt-get update ; apt-get upgrade # ##### (###
cron job ### #####?)

IDS

You can easily set up a dedicated Debian system as a stand-alone Intrusion Detection System using snort and a web-based interface to analyse the intrusion detection alerts:

- ### Debian #####
- Install one of the Snort versions with database support and configure the IDS to log alerts into the database.
- Download and install BASE (Basic Analysis and Security Engine), or ACID (Analysis Console for Intrusion Databases). Configure it to use the same database than Snort.
- Download and install the necessary packages¹.

BASE is currently packaged for Debian in acidbase and ACID is packaged as acidlab². Both provide a graphical WWW interface to Snort's output.

Besides the base installation you will also need a web server (such as apache), a **PHP** interpreter and a relational database (such postgresql or mysql) where Snort will store its alerts.

This system should be set up with at least two interfaces: one interface connected to a management LAN (for accessing the results and maintaining the system), and one interface with no IP address attached to the network segment being analyzed. You should configure the web server to listen only on the interface connected to the management LAN.

¹ Typically the needed packages will be installed through the dependencies

² It can also be downloaded from <http://www.cert.org/kb/acid/>, <http://acidlab.sourceforge.net> or <http://www.andrew.cmu.edu/~rdanyliw/snort/>.

You should configure both interfaces in the standard Debian `/etc/network/interfaces` configuration file. One (the management LAN) address can be configured as you would normally do. The other interface needs to be configured so that it is started up when the system boots, but with no interface address. You can use the following interface definition:

```
auto eth0
iface eth0 inet manual
    up ifconfig $IFACE 0.0.0.0 up
    up ip link set $IFACE promisc on
    down ip link set $IFACE promisc off
    down ifconfig $IFACE down
```

The above configures an interface to read all the traffic on the network in a *stealth*-type configuration. This prevents the NIDS system to be a direct target in a hostile network since the sensors have no IP address on the network. Notice, however, that there have been known bugs over time in sensors part of NIDS (for example see <https://lists.debian.org/debian-security-announce/2003/msg00087.html> related to Snort) and remote buffer overflows might even be triggered by network packet processing.

You might also want to read the <http://www.faqs.org/docs/Linux-HOWTO/Snort-Statistics-HOWTO.html> and the documentation available at the <https://www.snort.org/#documents>.

Setting up a bridge firewall

This information was contributed by Francois Bayart in order to help users set up a Linux bridge/firewall with the 2.4.x kernel and iptables. Kernel patches are no more needed as the code was made standard part of the Linux kernel distribution.

To configure the kernel with necessary support, run `make menuconfig` or `make xconfig`. In the section *Networking options*, enable the following options:

```
[*] Network packet filtering (replaces ipchains)
[ ] Network packet filtering debugging (NEW)
<*> 802.1d Ethernet Bridging
[*] netfilter (firewalling) support (NEW)
```

Caution: you must disable this if you want to apply some firewalling rules or else **iptables** will not work:


```
[ ] Network packet filtering debugging (NEW)
```

Next, add the correct options in the section *IP: Netfilter Configuration*. Then, compile and install the kernel. If you want to do it the *Debian way*, install `kernel-package` and run **make-kpkg** to create a custom Debian kernel package you can install on your server using `dpkg`. Once the new kernel is compiled and installed, install the `bridge-utils` package.

Once these steps are complete, you can complete the configuration of your bridge. The next section presents two different possible configurations for the bridge, each with a hypothetical network map and the necessary commands.

A bridge providing NAT and firewall capabilities

The first configuration uses the bridge as a firewall with network address translation (NAT) that protects a server and internal LAN clients. A diagram of the network configuration is shown below:

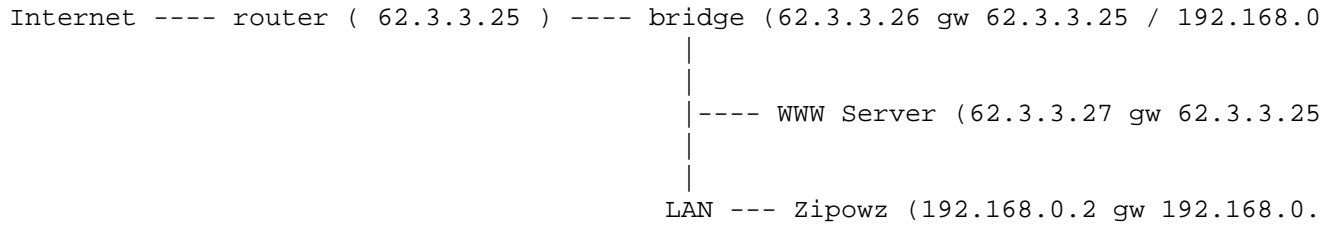

The following commands show how this bridge can be configured.

```

# Create the interface br0
/usr/sbin/brctl addbr br0

# Add the Ethernet interface to use with the bridge
/usr/sbin/brctl addif br0 eth0
/usr/sbin/brctl addif br0 eth1

# Start up the Ethernet interface
/sbin/ifconfig eth0 0.0.0.0
/sbin/ifconfig eth1 0.0.0.0


# Configure the bridge ethernet
# The bridge will be correct and invisible ( transparent firewall ).
# It's hidden in a traceroute and you keep your real gateway on the
# other computers. Now if you want you can config a gateway on your
# bridge and choose it as your new gateway for the other computers.

/sbin/ifconfig br0 62.3.3.26 netmask 255.255.255.248 broadcast 62.3.3.31

# I have added this internal IP to create my NAT
ip addr add 192.168.0.1/24 dev br0
/sbin/route add default gw 62.3.3.25
    
```

#####

A second possible configuration is a system that is set up as a transparent firewall for a LAN with a public IP address space.

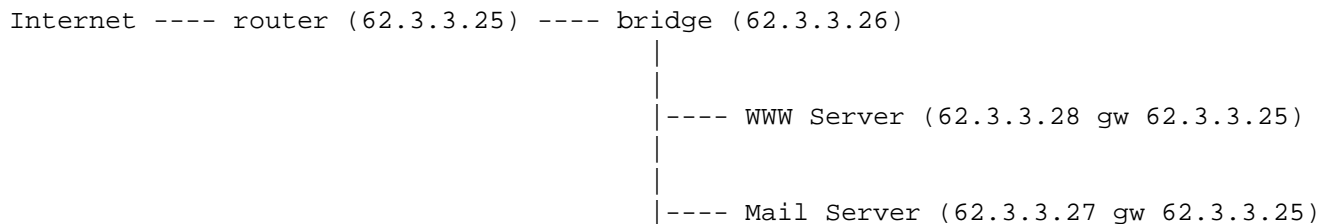

The following commands show how this bridge can be configured.

```

# Create the interface br0
/usr/sbin/brctl addbr br0
    
```

```

# Add the Ethernet interface to use with the bridge
/usr/sbin/brctl addif br0 eth0
/usr/sbin/brctl addif br0 eth1

# Start up the Ethernet interface
/sbin/ifconfig eth0 0.0.0.0
/sbin/ifconfig eth1 0.0.0.0

# Configure the bridge Ethernet
# The bridge will be correct and invisible ( transparent firewall ).
# It's hidden in a traceroute and you keep your real gateway on the
# other computers. Now if you want you can config a gateway on your
# bridge and choose it as your new gateway for the other computers.

/sbin/ifconfig br0 62.3.3.26 netmask 255.255.255.248 broadcast 62.3.3.31

```

If you traceroute the Linux Mail Server, you won't see the bridge. If you want access to the bridge with **ssh**, you must have a gateway or you must first connect to another server, such as the "Mail Server", and then connect to the bridge through the internal network card.

Basic IPTables rules

This is an example of the basic rules that could be used for either of these setups.

#B.1 Iptables

```

iptables -F FORWARD
iptables -P FORWARD DROP
iptables -A FORWARD -s 0.0.0.0/0.0.0.0 -d 0.0.0.0/0.0.0.0 -m state --state INVALID
iptables -A FORWARD -m state --state ESTABLISHED,RELATED -j ACCEPT

# Some funny rules but not in a classic Iptables sorry ...
# Limit ICMP
# iptables -A FORWARD -p icmp -m limit --limit 4/s -j ACCEPT
# Match string, a good simple method to block some VIRUS very quickly
# iptables -I FORWARD -j DROP -p tcp -s 0.0.0.0/0 -m string --string "cmd.exe"

# Block all MySQL connection just to be sure
iptables -A FORWARD -p tcp -s 0/0 -d 62.3.3.0/24 --dport 3306 -j DROP

# Linux Mail Server Rules

# Allow FTP-DATA (20), FTP (21), SSH (22)
iptables -A FORWARD -p tcp -s 0.0.0.0/0 -d 62.3.3.27/32 --dport 20:22 -j ACCEPT

# Allow the Mail Server to connect to the outside
# Note: This is *not* needed for the previous connections
# (remember: stateful filtering) and could be removed.
iptables -A FORWARD -p tcp -s 62.3.3.27/32 -d 0/0 -j ACCEPT

# WWW Server Rules

# Allow HTTP ( 80 ) connections with the WWW server

```

```

iptables -A FORWARD -p tcp -s 0.0.0.0/0 -d 62.3.3.28/32 --dport 80 -j ACCEPT

# Allow HTTPS ( 443 ) connections with the WWW server
iptables -A FORWARD -p tcp -s 0.0.0.0/0 -d 62.3.3.28/32 --dport 443 -j ACCEPT

# Allow the WWW server to go out
# Note: This is *not* needed for the previous connections
# (remember: stateful filtering) and could be removed.
iptables -A FORWARD -p tcp -s 62.3.3.28/32 -d 0/0 -j ACCEPT

```

Sample script to change the default Bind installation.

This script automates the procedure for changing the **bind** version 8 name server's default installation so that it does *not* run as the superuser. Notice that **bind** version 9 in Debian already does this by default³, and you are much better using that version than **bind** version 8.

This script is here for historical purposes and to show how you can automate this kind of changes system-wide. The script will create the user and groups defined for the name server and will modify both `/etc/default/bind` and `/etc/init.d/bind` so that the program will run with that user. Use with extreme care since it has not been tested thoroughly.

You can also create the users manually and use the patch available for the default `init.d` script attached to <http://bugs.debian.org/cgi-bin/bugreport.cgi?bug=157245>.

```

#!/bin/sh
# Change the default Debian bind v8 configuration to have it run
# with a non-root user and group.
#
# DO NOT USER this with version 9, use debconf for configure this instead
#
# WARN: This script has not been tested thoroughly, please
# verify the changes made to the INITD script

# (c) 2002 Javier Fernandez-Sanguino Pena
#
# This program is free software; you can redistribute it and/or modify
# it under the terms of the GNU General Public License as published by
# the Free Software Foundation; either version 1, or (at your option)
# any later version.
#
# This program is distributed in the hope that it will be useful,
# but WITHOUT ANY WARRANTY; without even the implied warranty of
# MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
# GNU General Public License for more details.
#
# Please see the file `COPYING' for the complete copyright notice.
#

restore() {

```

³ Since version 9.2.1-5. That is, since Debian release *sarge*.

```
# Just in case, restore the system if the changes fail
echo "WARN: Restoring to the previous setup since I'm unable to properly chang
echo "WARN: Please check the $INITDERR script."
mv $INITD $INITDERR
cp $INITDBAK $INITD
}

USER=named
GROUP=named
INITD=/etc/init.d/bind
DEFAULT=/etc/default/bind
INITDBAK=$INITD.preuserchange
INITDERR=$INITD.changeerror
AWKS="awk ' /\usr\sbin\ndc reload/ { print \"stop; sleep 2; start;\"; noprint

[ `id -u` -ne 0 ] && {
    echo "This program must be run by the root user"
    exit 1
}

RUNUSER=`ps eo user,fname |grep named |cut -f 1 -d " "`

if [ "$RUNUSER" = "$USER" ]
then
    echo "WARN: The name server running daemon is already running as $USER"
    echo "ERR:  This script will not do any changes to your setup."
    exit 1
fi
if [ ! -f "$INITD" ]
then
    echo "ERR:  This system does not have $INITD (which this script tries to chang
RUNNING=`ps eo fname |grep named`
[ -z "$RUNNING" ] && \
    echo "ERR:  In fact the name server daemon is not even running (is it instal
    echo "ERR:  No changes will be made to your system"
    exit 1
fi

# Check if there are options already setup
if [ -e "$DEFAULT" ]
then
    if grep -q ^OPTIONS $DEFAULT; then
        echo "ERR: The $DEFAULT file already has options set."
        echo "ERR:  No changes will be made to your system"
    fi
fi

# Check if named group exists
if [ -z "`grep $GROUP /etc/group`" ]
then
    echo "Creating group $GROUP:"
    addgroup $GROUP
else
```

```

    echo "WARN: Group $GROUP already exists. Will not create it"
fi
# Same for the user
if [ -z "`grep $USER /etc/passwd`" ]
then
    echo "Creating user $USER:"
    adduser --system --home /home/$USER \
        --no-create-home --ingroup $GROUP \
        --disabled-password --disabled-login $USER
else
    echo "WARN: The user $USER already exists. Will not create it"
fi

# Change the init.d script

# First make a backup (check that there is not already
# one there first)
if [ ! -f $INITDBAK ]
then
    cp $INITD $INITDBAK
fi

# Then use it to change it
cat $INITDBAK |
eval $AWKS > $INITD

# Now put the options in the /etc/default/bind file:
cat >>$DEFAULT <<EOF
# Make bind run with the user we defined
OPTIONS="-u $USER -g $GROUP"
EOF

echo "WARN: The script $INITD has been changed, trying to test the changes."
echo "Restarting the named daemon (check for errors here)."
$INITD restart
if [ $? -ne 0 ]
then
    echo "ERR: Failed to restart the daemon."
    restore
    exit 1
fi

RUNNING=`ps eo fname |grep named`
if [ -z "$RUNNING" ]
then
    echo "ERR: Named is not running, probably due to a problem with the changes."
    restore
    exit 1
fi

# Check if it's running as expected
RUNUSER=`ps eo user, fname |grep named |cut -f 1 -d " "`

```

```

if [ "$RUNUSER" = "$USER" ]
then
  echo "All has gone well, named seems to be running now as $USER."
else
  echo "ERR: The script failed to automatically change the system."
  echo "ERR: Named is currently running as $RUNUSER."
  restore
  exit 1
fi

exit 0

```

The previous script, run on Woody's (Debian 3.0) custom **bind** (version 8), will modify the `initd` file after creating the 'named' user and group and will

Security update protected by a firewall

After a standard installation, a system may still have some security vulnerabilities. Unless you can download updates for the vulnerable packages on another system (or you have mirrored `security.debian.org` for local use), the system will have to be connected to the Internet for the downloads.

However, as soon as you connect to the Internet you are exposing this system. If one of your local services is vulnerable, you might be compromised even before the update is finished! This may seem paranoid but, in fact, analysis from the <http://www.honeynet.org> has shown that systems can be compromised in less than three days, even if the system is not publicly known (i.e., not published in DNS records).

When doing an update on a system not protected by an external system like a firewall, it is possible to properly configure your local firewall to restrict connections involving only the security update itself. The example below shows how to set up such local firewall capabilities, which allow connections from `security.debian.org` only, logging all others.

The following example can be used to setup a restricted firewall ruleset. Run this commands from a local console (not a remote one) to reduce the chances of locking yourself out of the system.

```

# iptables -F
# iptables -L
Chain INPUT (policy ACCEPT)
target      prot opt source                destination

Chain FORWARD (policy ACCEPT)
target      prot opt source                destination

Chain OUTPUT (policy ACCEPT)
target      prot opt source                destination
# iptables -A OUTPUT -d security.debian.org --dport 80 -j ACCEPT
# iptables -A INPUT -m state --state ESTABLISHED,RELATED -j ACCEPT
# iptables -A INPUT -p icmp -j ACCEPT
# iptables -A INPUT -j LOG
# iptables -A OUTPUT -j LOG
# iptables -P INPUT DROP
# iptables -P FORWARD DROP
# iptables -P OUTPUT DROP
# iptables -L

```

```

Chain INPUT (policy DROP)
target      prot opt source                destination
ACCEPT     all  --  0.0.0.0/0             0.0.0.0/0           state RELATED,ESTABLISHED
ACCEPT     icmp --  0.0.0.0/0             0.0.0.0/0
LOG        all  --  anywhere              anywhere             LOG level warning

Chain FORWARD (policy DROP)
target      prot opt source                destination

Chain OUTPUT (policy DROP)
target      prot opt source                destination
ACCEPT     80   --  anywhere              security.debian.org
LOG        all  --  anywhere              anywhere             LOG level warning

```

Note: Using a *DROP* policy in the INPUT chain is the most correct thing to do, but be *very* careful when doing this after flushing the chain from a remote connection. When testing firewall rulesets from a remote location it is best if you run a script with the firewall ruleset (instead of introducing the ruleset line by line through the command line) and, as a precaution, keep a backdoor⁴

Of course, you should disable any backdoors before getting the system into production. configured so that you can re-enable access to the system if you make a mistake. That way there would be no need to go to a remote location to fix a firewall ruleset that blocks you.

FIXME: This needs DNS to be working properly since it is required for security.debian.org to work. You can add security.debian.org to /etc/hosts but now it is a CNAME to several hosts (there is more than one security mirror)

FIXME: this will only work with HTTP URLs since ftp might need the ip_conntrack_ftp module, or use passive mode.

Chroot environment for SSH

Creating a restricted environment for SSH is a tough job due to its dependencies and the fact that, unlike other servers, SSH provides a remote shell to users. Thus, you will also have to consider the applications users will be allowed to use in the environment.

You have two options to setup a restricted remote shell:

⁴ Such as *knockd*. Alternatively, you can open a different console and have the system ask for confirmation that there is somebody on the other side, and reset the firewall chain if no confirmation is given. The following test script could be of use:

```

#!/bin/bash

while true; do
    read -n 1 -p "Are you there? " -t 30 ayt
    if [ -z "$ayt" ]; then
        break
    fi
done

# Reset the firewall chain, user is not available
echo
echo "Resetting firewall chain!"
iptables -F
iptables -P INPUT ACCEPT
iptables -P FORWARD ACCEPT
iptables -P OUTPUT ACCEPT
exit 1

```


- Chrooting the ssh users, by properly configuring the ssh daemon you can ask it to chroot a user after authentication just before it is provided a shell. Each user can have their own environment.
- Chrooting the ssh server, since you chroot the ssh application itself all users are chrooted to the defined environment.

The first option has the advantage of making it possible to have both non-chrooted and chrooted users, if you don't introduce any `setuid` application in the user's chroots it is more difficult to break out of it. However, you might need to setup individual chroots for each user and it is more difficult to setup (as it requires cooperation from the SSH server). The second option is more easy to setup, and protects from an exploitation of the ssh server itself (since it's also in the chroot) but it will have the limitation that all users will share the same chroot environment (you cannot setup a per-user chroot environment).

Chrooting the ssh users

You can setup the ssh server so that it will chroot a set of defined users into a shell with a limited set of applications available.

Using libpam-chroot

Probably the easiest way is to use the `libpam-chroot` package provided in Debian. Once you install it you need to:

- Modify `/etc/pam.d/ssh` to use this PAM module, add as its last line⁵:

```
session    required    pam_chroot.so
```

- set a proper chroot environment for the user. You can try using the scripts available at `/usr/share/doc/libpam-chroot/examples/`, use the `makejail`⁶ program or setup a minimum Debian environment with `debootstrap`. Make sure the environment includes the needed devices⁷.
- Configure `/etc/security/chroot.conf` so that the users you determine are chrooted to the directory you setup previously. You might want to have independent directories for different users so that they will not be able to see neither the whole system nor each other's.
- Configure SSH: Depending on your OpenSSH version the chroot environment might work straight of the box or not. Since 3.6.1p2 the `do_pam_session()` function is called after `sshd` has dropped privileges, since `chroot()` needs root privileges it will not work with Privilege separation on. In newer OpenSSH versions, however, the PAM code has been modified and `do_pam_session` is called before dropping

⁵ You can use the `debug` option to have it send the progress of the module to the `authpriv.notice` facility

⁶ You can create a very limited bash environment with the following python definition for `makejail`, just create the directory `/var/chroots/users/foo` and a file with the following contents and call it `bash.py`:

```
chroot="/var/chroots/users/foo"
cleanJailFirst=1
testCommandsInsideJail=["bash ls"]
```

And then run `makejail bash.py` to create the user environment at `/var/chroots/users/foo`. To test the environment run:

```
# chroot /var/chroots/users/foo/ ls
bin dev etc lib proc sbin usr
```

⁷ In some occasions you might need the `/dev/ptmx` and `/dev/pty*` devices and the `/dev/pts/` subdirectory. Running `MAKEDEV` in the `/dev` directory of the chrooted environment should be sufficient to create them if they do not exist. If you are using kernels (version 2.6) which dynamically create device files you will need to create the `/dev/pts/` files yourself and grant them the proper privileges.

privileges so it will work even with Privilege separation is on. If you have to disable it modify `/etc/ssh/sshd_config` like this:

```
UsePrivilegeSeparation no
```

Notice that this will lower the security of your system since the OpenSSH server will then run as `root` user. This means that if a remote attack is found against OpenSSH an attacker will get `root` privileges instead of `sshd`, thus compromising the whole system.⁸

If you don't disable *Privilege Separation* you will need an `/etc/passwd` which includes the user's UID inside the chroot for *Privilege Separation* to work properly.

If you have *Privilege Separation* set to *yes* and your OpenSSH version does not behave properly you will need to disable it. If you don't, users that try to connect to your server and would be chrooted by this module will see this:

```
$ ssh -l user server
user@server's password:
Connection to server closed by remote host.
Connection to server closed.
```

This is because the ssh daemon, which is running as 'sshd', is not be able to make the `chroot()` system call. To disable Privilege separation you have to modify the `/etc/ssh/sshd_config` configuration file as described above.

Notice that if any of the following is missing the users will not be able to logon to the chroot:

- The `/proc` filesystem needs to be mounted in the users' chroot.
- The necessary `/dev/pts/` devices need to exist. If the files are generated by your running kernel automatically then you have to manually create them on the chroot's `/dev/`.
- The user's home directory has to exist in the chroot, otherwise the ssh daemon will not continue.

You can debug all these issues if you use the `debug` keyword in the `/etc/pam.d/ssh` PAM definition. If you encounter issues you might find it useful to enable the debugging mode on the ssh client too.

Note: This information is also available (and maybe more up to date) in `/usr/share/doc/libpam-chroot/README.Debian.gz`, please review it for updated information before taking the above steps.

Patching the ssh server

Debian's `sshd` does not allow restriction of a user's movement through the server, since it lacks the `chroot` function that the commercial program `sshd2` includes (using 'ChrootGroups' or 'ChrootUsers', see `sshd2_config(5)`). However, there is a patch available to add this functionality available from <http://chrootssh.sourceforge.net> (requested and available in <http://bugs.debian.org/139047> in Debian). The patch may be included in future releases of the OpenSSH package. Emmanuel Lacour has `ssh` deb packages for `sarge` with this feature. They are available at <http://debian.home-dn.net/sarge/ssh/>. Notice that those might not be up to date so completing the compilation step is recommended.

After applying the patch, modify `/etc/passwd` by changing the home path of the users (with the special `./` token):

⁸ If you are using a kernel that implements Mandatory Access Control (RSBAC/SELinux) you can avoid changing this configuration just by granting the `sshd` user privileges to make the `chroot()` system call.

joeuser:x:1099:1099:Joe Random User:/home/joe/./:/bin/bash

ssh

chroot ##### (chroot #####) ##
root #####:

./bin:

total 660

drwxr-xr-x	2	root	root	4096	Mar	18	13:36	.
drwxr-xr-x	8	guest	guest	4096	Mar	15	16:53	..
-r-xr-xr-x	1	root	root	531160	Feb	6	22:36	bash
-r-xr-xr-x	1	root	root	43916	Nov	29	13:19	ls
-r-xr-xr-x	1	root	root	16684	Nov	29	13:19	mkdir
-rwxr-xr-x	1	root	root	23960	Mar	18	13:36	more
-r-xr-xr-x	1	root	root	9916	Jul	26	2001	pwd
-r-xr-xr-x	1	root	root	24780	Nov	29	13:19	rm
lrwxrwxrwx	1	root	root	4	Mar	30	16:29	sh -> bash

./etc:

total 24

drwxr-xr-x	2	root	root	4096	Mar	15	16:13	.
drwxr-xr-x	8	guest	guest	4096	Mar	15	16:53	..
-rw-r--r--	1	root	root	54	Mar	15	13:23	group
-rw-r--r--	1	root	root	428	Mar	15	15:56	hosts
-rw-r--r--	1	root	root	44	Mar	15	15:53	passwd
-rw-r--r--	1	root	root	52	Mar	15	13:23	shells

./lib:

total 1848

drwxr-xr-x	2	root	root	4096	Mar	18	13:37	.
drwxr-xr-x	8	guest	guest	4096	Mar	15	16:53	..
-rwxr-xr-x	1	root	root	92511	Mar	15	12:49	ld-linux.so.2
-rwxr-xr-x	1	root	root	1170812	Mar	15	12:49	libc.so.6
-rw-r--r--	1	root	root	20900	Mar	15	13:01	libcrypt.so.1
-rw-r--r--	1	root	root	9436	Mar	15	12:49	libdl.so.2
-rw-r--r--	1	root	root	248132	Mar	15	12:48	libncurses.so.5
-rw-r--r--	1	root	root	71332	Mar	15	13:00	libnsl.so.1
-rw-r--r--	1	root	root	34144	Mar	15	16:10	
libnss_files.so.2								
-rw-r--r--	1	root	root	29420	Mar	15	12:57	libpam.so.0
-rw-r--r--	1	root	root	105498	Mar	15	12:51	libpthread.so.0
-rw-r--r--	1	root	root	25596	Mar	15	12:51	librt.so.1
-rw-r--r--	1	root	root	7760	Mar	15	12:59	libutil.so.1
-rw-r--r--	1	root	root	24328	Mar	15	12:57	libwrap.so.0

./usr:

total 16

drwxr-xr-x	4	root	root	4096	Mar	15	13:00	.
drwxr-xr-x	8	guest	guest	4096	Mar	15	16:53	..

```

drwxr-xr-x  2 root  root      4096 Mar 15 15:55 bin
drwxr-xr-x  2 root  root      4096 Mar 15 15:37 lib

./usr/bin:
total 340
drwxr-xr-x  2 root  root      4096 Mar 15 15:55 .
drwxr-xr-x  4 root  root      4096 Mar 15 13:00 ..
-rwxr-xr-x  1 root  root     10332 Mar 15 15:55 env
-rwxr-xr-x  1 root  root     13052 Mar 15 13:13 id
-r-xr-xr-x  1 root  root     25432 Mar 15 12:40 scp
-rwxr-xr-x  1 root  root     43768 Mar 15 15:15 sftp
-r-sr-xr-x  1 root  root    218456 Mar 15 12:40 ssh
-rwxr-xr-x  1 root  root      9692 Mar 15 13:17 tty

./usr/lib:
total 852
drwxr-xr-x  2 root  root      4096 Mar 15 15:37 .
drwxr-xr-x  4 root  root      4096 Mar 15 13:00 ..
-rw-r--r--  1 root  root    771088 Mar 15 13:01
libcrypto.so.0.9.6
-rw-r--r--  1 root  root     54548 Mar 15 13:00 libz.so.1
-rwxr-xr-x  1 root  root     23096 Mar 15 15:37 sftp-server

```

Chrooting the ssh server

If you create a chroot which includes the SSH server files in, for example `/var/chroot/ssh`, you would start the **ssh** server **chroot**'ed with this command:

```
# chroot /var/chroot/ssh /sbin/sshd -f /etc/ssh/config
```

That would make startup the **sshd** daemon inside the chroot. In order to do that you have to first prepare the contents of the `/var/chroot/ssh` directory so that it includes both the SSH server and all the utilities that the users connecting to that server might need. If you are doing this you should make certain that OpenSSH uses *Privilege Separation* (which is the default) having the following line in the configuration file `/etc/ssh/ssh_config`:

```
UsePrivilegeSeparation yes
```

That way the remote daemon will do as few things as possible as the root user so even if there is a bug in it it will not compromise the chroot. Notice that, unlike the case in which you setup a per-user chroot, the ssh daemon is running in the same chroot as the users so there is at least one potential process running as root which could break out of the chroot.

Notice, also, that in order for SSH to work in that location, the partition where the chroot directory resides cannot be mounted with the *nodev* option. If you use that option, then you will get the following error: *PRNG is not seeded*, because `/dev/urandom` does not work in the chroot.

Setup a minimal system (the really easy way)

You can use `debootstrap` to setup a minimal environment that just includes the ssh server. In order to do this you just have to create a chroot as described in the <http://www.debian.org/doc/manuals/>

reference/ch09#_chroot_system document. This method is bound to work (you will get all the necessary components for the chroot) but at the cost of disk space (a minimal installation of Debian will amount to several hundred megabytes). This minimal system might also include setuid files that a user in the chroot could use to break out of the chroot if any of those could be use for a privilege escalation.

Automatically making the environment (the easy way)

You can easily create a restricted environment with the `makejail` package, since it automatically takes care of tracing the server daemon (with **strace**), and makes it run under the restricted environment.

The advantage of programs that automatically generate **chroot** environments is that they are capable of copying any package to the **chroot** environment (even following the package's dependencies and making sure it's complete). Thus, providing user applications is easier.

To set up the environment using **makejail**'s provided examples, just create `/var/chroot/ssh` and use the command:

```
# makejail /usr/share/doc/makejail/examples/ssh.py
```

This will setup the chroot in the `/var/chroot/ssh` directory. Notice that this chroot will not fully work unless you:

- Mount the *procfs* filesystem in `/var/chroot/ssh/proc`. **Makejail** will mount it for you but if the system reboots you need to remount it running:

```
# mount -t proc proc /var/chroot/ssh/proc
```

You can also have it be mounted automatically by editing `/etc/fstab` and including this line:

```
proc-ssh /var/chroot/ssh/proc proc none 0 0
```

- Have syslog listen to the device `/dev/log` inside the chroot. In order to do this you have modify `/etc/default/syslogd` and add `-a /var/chroot/ssh/dev/log` to the `SYSLOGD` variable definition.

Read the sample file to see what other changes need to be made to the environment. Some of these changes, such as copying user's home directories, cannot be done automatically. Also, limit the exposure of sensitive information by only copying the data from a given number of users from the files `/etc/shadow` or `/etc/group`. Notice that if you are using Privilege Separation the `ssh` user needs to exist in those files.

The following sample environment has been (slightly) tested in Debian 3.0 and is built with the configuration file provided in the package and includes the `fileutils` package:

```
.
|-- bin
|   |-- ash
|   |-- bash
|   |-- chgrp
|   |-- chmod
|   |-- chown
|   |-- cp
|   |-- csh -> /etc/alternatives/csh
|   |-- dd
```

```
| | -- df
| | -- dir
| | -- fdflush
| | -- ksh
| | -- ln
| | -- ls
| | -- mkdir
| | -- mknod
| | -- mv
| | -- rbash -> bash
| | -- rm
| | -- rmdir
| | -- sh -> bash
| | -- sync
| | -- tcsh
| | -- touch
| | -- vdir
| | -- zsh -> /etc/alternatives/zsh
| `-- zsh4
|-- dev
| | -- null
| | -- ptmx
| | -- pts
| | -- ptya0
| (...)
| | -- tty
| | -- tty0
| (...)
| `-- urandom
|-- etc
| | -- alternatives
| | | -- csh -> /bin/tcsh
| | | `-- zsh -> /bin/zsh4
| | -- environment
| | -- hosts
| | -- hosts.allow
| | -- hosts.deny
| | -- ld.so.conf
| | -- localtime -> /usr/share/zoneinfo/Europe/Madrid
| | -- motd
| | -- nsswitch.conf
| | -- pam.conf
| | -- pam.d
| | | -- other
| | | `-- ssh
| | -- passwd
| | -- resolv.conf
| | -- security
| | | -- access.conf
| | | -- chroot.conf
| | | -- group.conf
| | | -- limits.conf
| | | -- pam_env.conf
| | | `-- time.conf
```

```
|-- shadow
|-- shells
`-- ssh
    |-- moduli
    |-- ssh_host_dsa_key
    |-- ssh_host_dsa_key.pub
    |-- ssh_host_rsa_key
    |-- ssh_host_rsa_key.pub
    `-- sshd_config
-- home
  `-- userX
-- lib
  |-- ld-2.2.5.so
  |-- ld-linux.so.2 -> ld-2.2.5.so
  |-- libc-2.2.5.so
  |-- libc.so.6 -> libc-2.2.5.so
  |-- libcap.so.1 -> libcap.so.1.10
  |-- libcap.so.1.10
  |-- libcrypt-2.2.5.so
  |-- libcrypt.so.1 -> libcrypt-2.2.5.so
  |-- libdl-2.2.5.so
  |-- libdl.so.2 -> libdl-2.2.5.so
  |-- libm-2.2.5.so
  |-- libm.so.6 -> libm-2.2.5.so
  |-- libncurses.so.5 -> libncurses.so.5.2
  |-- libncurses.so.5.2
  |-- libnsl-2.2.5.so
  |-- libnsl.so.1 -> libnsl-2.2.5.so
  |-- libnss_compat-2.2.5.so
  |-- libnss_compat.so.2 -> libnss_compat-2.2.5.so
  |-- libnss_db-2.2.5.so
  |-- libnss_db.so.2 -> libnss_db-2.2.5.so
  |-- libnss_dns-2.2.5.so
  |-- libnss_dns.so.2 -> libnss_dns-2.2.5.so
  |-- libnss_files-2.2.5.so
  |-- libnss_files.so.2 -> libnss_files-2.2.5.so
  |-- libnss_hesiod-2.2.5.so
  |-- libnss_hesiod.so.2 -> libnss_hesiod-2.2.5.so
  |-- libnss_nis-2.2.5.so
  |-- libnss_nis.so.2 -> libnss_nis-2.2.5.so
  |-- libnss_nisplus-2.2.5.so
  |-- libnss_nisplus.so.2 -> libnss_nisplus-2.2.5.so
  |-- libpam.so.0 -> libpam.so.0.72
  |-- libpam.so.0.72
  |-- libpthread-0.9.so
  |-- libpthread.so.0 -> libpthread-0.9.so
  |-- libresolv-2.2.5.so
  |-- libresolv.so.2 -> libresolv-2.2.5.so
  |-- librt-2.2.5.so
  |-- librt.so.1 -> librt-2.2.5.so
  |-- libutil-2.2.5.so
  |-- libutil.so.1 -> libutil-2.2.5.so
  |-- libwrap.so.0 -> libwrap.so.0.7.6
  |-- libwrap.so.0.7.6
```

```
|-- security
|   |-- pam_access.so
|   |-- pam_chroot.so
|   |-- pam_deny.so
|   |-- pam_env.so
|   |-- pam_filter.so
|   |-- pam_ftp.so
|   |-- pam_group.so
|   |-- pam_issue.so
|   |-- pam_lastlog.so
|   |-- pam_limits.so
|   |-- pam_listfile.so
|   |-- pam_mail.so
|   |-- pam_mkhomedir.so
|   |-- pam_motd.so
|   |-- pam_nologin.so
|   |-- pam_permit.so
|   |-- pam_rhosts_auth.so
|   |-- pam_rootok.so
|   |-- pam_securetty.so
|   |-- pam_shells.so
|   |-- pam_stress.so
|   |-- pam_tally.so
|   |-- pam_time.so
|   |-- pam_unix.so
|   |-- pam_unix_acct.so -> pam_unix.so
|   |-- pam_unix_auth.so -> pam_unix.so
|   |-- pam_unix_passwd.so -> pam_unix.so
|   |-- pam_unix_session.so -> pam_unix.so
|   |-- pam_userdb.so
|   |-- pam_warn.so
|   `-- pam_wheel.so
|-- sbin
|   `-- start-stop-daemon
|-- usr
|   |-- bin
|   |   |-- dircolors
|   |   |-- du
|   |   |-- install
|   |   |-- link
|   |   |-- mkfifo
|   |   |-- shred
|   |   |-- touch -> /bin/touch
|   |   `-- unlink
|   |-- lib
|   |   |-- libcrypto.so.0.9.6
|   |   |-- libdb3.so.3 -> libdb3.so.3.0.2
|   |   |-- libdb3.so.3.0.2
|   |   |-- libz.so.1 -> libz.so.1.1.4
|   |   `-- libz.so.1.1.4
|   |-- sbin
|   |   `-- sshd
|   `-- share
|       |-- locale
```



```

|-- es
|   |-- LC_MESSAGES
|   |   |-- fileutils.mo
|   |   |-- libc.mo
|   |   |-- sh-utils.mo
|   |-- LC_TIME -> LC_MESSAGES
|-- zoneinfo
|   |-- Europe
|   |-- Madrid
|-- var
|   |-- run
|   |   |-- sshd
|   |   |-- sshd.pid

```

27 directories, 733 files

For Debian release 3.1 you have to make sure that the environment includes also the common files for PAM. The following files need to be copied over to the chroot if **makejail** did not do it for you:

```

$ ls /etc/pam.d/common-*
/etc/pam.d/common-account /etc/pam.d/common-password
/etc/pam.d/common-auth    /etc/pam.d/common-session

```

Manually creating the environment (the hard way)

It is possible to create an environment, using a trial-and-error method, by monitoring the **sshd** server traces and log files in order to determine the necessary files. The following environment, contributed by José Luis Ledesma, is a sample listing of files in a **chroot** environment for **ssh** in Debian woody (3.0):⁹

```

.:
total 36
drwxr-xr-x 9 root root 4096 Jun 5 10:05 ./
drwxr-xr-x 11 root root 4096 Jun 3 13:43 ../
drwxr-xr-x 2 root root 4096 Jun 4 12:13 bin/
drwxr-xr-x 2 root root 4096 Jun 4 12:16 dev/
drwxr-xr-x 4 root root 4096 Jun 4 12:35 etc/
drwxr-xr-x 3 root root 4096 Jun 4 12:13 lib/
drwxr-xr-x 2 root root 4096 Jun 4 12:35 sbin/
drwxr-xr-x 2 root root 4096 Jun 4 12:32 tmp/
drwxr-xr-x 2 root root 4096 Jun 4 12:16 usr/
./bin:
total 8368
drwxr-xr-x 2 root root 4096 Jun 4 12:13 ./
drwxr-xr-x 9 root root 4096 Jun 5 10:05 ../
-rwxr-xr-x 1 root root 109855 Jun 3 13:45 a2p*
-rwxr-xr-x 1 root root 387764 Jun 3 13:45 bash*
-rwxr-xr-x 1 root root 36365 Jun 3 13:45 c2ph*
-rwxr-xr-x 1 root root 20629 Jun 3 13:45 dprofpp*
-rwxr-xr-x 1 root root 6956 Jun 3 13:46 env*
-rwxr-xr-x 1 root root 158116 Jun 3 13:45 fax2ps*

```

⁹ Notice that there are no SETUID files. This makes it more difficult for remote users to escape the **chroot** environment. However, it also prevents users from changing their passwords, since the **passwd** program cannot modify the files `/etc/passwd` or `/etc/shadow`.

Appendix

```
-rwxr-xr-x 1 root root 104008 Jun 3 13:45 faxalter*
-rwxr-xr-x 1 root root 89340 Jun 3 13:45 faxcover*
-rwxr-xr-x 1 root root 441584 Jun 3 13:45 faxmail*
-rwxr-xr-x 1 root root 96036 Jun 3 13:45 faxrm*
-rwxr-xr-x 1 root root 107000 Jun 3 13:45 faxstat*
-rwxr-xr-x 1 root root 77832 Jun 4 11:46 grep*
-rwxr-xr-x 1 root root 19597 Jun 3 13:45 h2ph*
-rwxr-xr-x 1 root root 46979 Jun 3 13:45 h2xs*
-rwxr-xr-x 1 root root 10420 Jun 3 13:46 id*
-rwxr-xr-x 1 root root 4528 Jun 3 13:46 ldd*
-rwxr-xr-x 1 root root 111386 Jun 4 11:46 less*
-r-xr-xr-x 1 root root 26168 Jun 3 13:45 login*
-rwxr-xr-x 1 root root 49164 Jun 3 13:45 ls*
-rwxr-xr-x 1 root root 11600 Jun 3 13:45 mkdir*
-rwxr-xr-x 1 root root 24780 Jun 3 13:45 more*
-rwxr-xr-x 1 root root 154980 Jun 3 13:45 pal2rgb*
-rwxr-xr-x 1 root root 27920 Jun 3 13:46 passwd*
-rwxr-xr-x 1 root root 4241 Jun 3 13:45 pl2pm*
-rwxr-xr-x 1 root root 2350 Jun 3 13:45 pod2html*
-rwxr-xr-x 1 root root 7875 Jun 3 13:45 pod2latex*
-rwxr-xr-x 1 root root 17587 Jun 3 13:45 pod2man*
-rwxr-xr-x 1 root root 6877 Jun 3 13:45 pod2text*
-rwxr-xr-x 1 root root 3300 Jun 3 13:45 pod2usage*
-rwxr-xr-x 1 root root 3341 Jun 3 13:45 podchecker*
-rwxr-xr-x 1 root root 2483 Jun 3 13:45 podselect*
-r-xr-xr-x 1 root root 82412 Jun 4 11:46 ps*
-rwxr-xr-x 1 root root 36365 Jun 3 13:45 pstruct*
-rwxr-xr-x 1 root root 7120 Jun 3 13:45 pwd*
-rwxr-xr-x 1 root root 179884 Jun 3 13:45 rgb2ycbcr*
-rwxr-xr-x 1 root root 20532 Jun 3 13:45 rm*
-rwxr-xr-x 1 root root 6720 Jun 4 10:15 rmdir*
-rwxr-xr-x 1 root root 14705 Jun 3 13:45 s2p*
-rwxr-xr-x 1 root root 28764 Jun 3 13:46 scp*
-rwxr-xr-x 1 root root 385000 Jun 3 13:45 sendfax*
-rwxr-xr-x 1 root root 67548 Jun 3 13:45 sendpage*
-rwxr-xr-x 1 root root 88632 Jun 3 13:46 sftp*
-rwxr-xr-x 1 root root 387764 Jun 3 13:45 sh*
-rws--x--x 1 root root 744500 Jun 3 13:46 slogin*
-rwxr-xr-x 1 root root 14523 Jun 3 13:46 splain*
-rws--x--x 1 root root 744500 Jun 3 13:46 ssh*
-rwxr-xr-x 1 root root 570960 Jun 3 13:46 ssh-add*
-rwxr-xr-x 1 root root 502952 Jun 3 13:46 ssh-agent*
-rwxr-xr-x 1 root root 575740 Jun 3 13:46 ssh-keygen*
-rwxr-xr-x 1 root root 383480 Jun 3 13:46 ssh-keyscan*
-rwxr-xr-x 1 root root 39 Jun 3 13:46 ssh_europa*
-rwxr-xr-x 1 root root 107252 Jun 4 10:14 strace*
-rwxr-xr-x 1 root root 8323 Jun 4 10:14 strace-graph*
-rwxr-xr-x 1 root root 158088 Jun 3 13:46 thumbnail*
-rwxr-xr-x 1 root root 6312 Jun 3 13:46 tty*
-rwxr-xr-x 1 root root 55904 Jun 4 11:46 useradd*
-rwxr-xr-x 1 root root 585656 Jun 4 11:47 vi*
-rwxr-xr-x 1 root root 6444 Jun 4 11:45 whoami*
./dev:
total 8
```

Appendix

```
drwxr-xr-x 2 root root 4096 Jun 4 12:16 ./
drwxr-xr-x 9 root root 4096 Jun 5 10:05 ../
crw-r--r-- 1 root root 1, 9 Jun 3 13:43 urandom
./etc:
total 208
drwxr-xr-x 4 root root 4096 Jun 4 12:35 ./
drwxr-xr-x 9 root root 4096 Jun 5 10:05 ../
-rw----- 1 root root 0 Jun 4 11:46 .pwd.lock
-rw-r--r-- 1 root root 653 Jun 3 13:46 group
-rw-r--r-- 1 root root 242 Jun 4 11:33 host.conf
-rw-r--r-- 1 root root 857 Jun 4 12:04 hosts
-rw-r--r-- 1 root root 1050 Jun 4 11:29 ld.so.cache
-rw-r--r-- 1 root root 304 Jun 4 11:28 ld.so.conf
-rw-r--r-- 1 root root 235 Jun 4 11:27 ld.so.conf~
-rw-r--r-- 1 root root 88039 Jun 3 13:46 moduli
-rw-r--r-- 1 root root 1342 Jun 4 11:34 nsswitch.conf
drwxr-xr-x 2 root root 4096 Jun 4 12:02 pam.d/
-rw-r--r-- 1 root root 28 Jun 4 12:00 pam_smb.conf
-rw-r--r-- 1 root root 2520 Jun 4 11:57 passwd
-rw-r--r-- 1 root root 7228 Jun 3 13:48 profile
-rw-r--r-- 1 root root 1339 Jun 4 11:33 protocols
-rw-r--r-- 1 root root 274 Jun 4 11:44 resolv.conf
drwxr-xr-x 2 root root 4096 Jun 3 13:43 security/
-rw-r----- 1 root root 1178 Jun 4 11:51 shadow
-rw----- 1 root root 80 Jun 4 11:45 shadow-
-rw-r----- 1 root root 1178 Jun 4 11:48 shadow.old
-rw-r--r-- 1 root root 161 Jun 3 13:46 shells
-rw-r--r-- 1 root root 1144 Jun 3 13:46 ssh_config
-rw----- 1 root root 668 Jun 3 13:46 ssh_host_dsa_key
-rw-r--r-- 1 root root 602 Jun 3 13:46 ssh_host_dsa_key.pub
-rw----- 1 root root 527 Jun 3 13:46 ssh_host_key
-rw-r--r-- 1 root root 331 Jun 3 13:46 ssh_host_key.pub
-rw----- 1 root root 883 Jun 3 13:46 ssh_host_rsa_key
-rw-r--r-- 1 root root 222 Jun 3 13:46 ssh_host_rsa_key.pub
-rw-r--r-- 1 root root 2471 Jun 4 12:15 sshd_config
./etc/pam.d:
total 24
drwxr-xr-x 2 root root 4096 Jun 4 12:02 ./
drwxr-xr-x 4 root root 4096 Jun 4 12:35 ../
lrwxrwxrwx 1 root root 4 Jun 4 12:02 other -> sshd
-rw-r--r-- 1 root root 318 Jun 3 13:46 passwd
-rw-r--r-- 1 root root 546 Jun 4 11:36 ssh
-rw-r--r-- 1 root root 479 Jun 4 12:02 sshd
-rw-r--r-- 1 root root 370 Jun 3 13:46 su
./etc/security:
total 32
drwxr-xr-x 2 root root 4096 Jun 3 13:43 ./
drwxr-xr-x 4 root root 4096 Jun 4 12:35 ../
-rw-r--r-- 1 root root 1971 Jun 3 13:46 access.conf
-rw-r--r-- 1 root root 184 Jun 3 13:46 chroot.conf
-rw-r--r-- 1 root root 2145 Jun 3 13:46 group.conf
-rw-r--r-- 1 root root 1356 Jun 3 13:46 limits.conf
-rw-r--r-- 1 root root 2858 Jun 3 13:46 pam_env.conf
-rw-r--r-- 1 root root 2154 Jun 3 13:46 time.conf
```

```

./lib:
total 8316
drwxr-xr-x 3 root root 4096 Jun 4 12:13 ./
drwxr-xr-x 9 root root 4096 Jun 5 10:05 ../
-rw-r--r-- 1 root root 1024 Jun 4 11:51 cracklib_dict.hwm
-rw-r--r-- 1 root root 214324 Jun 4 11:51 cracklib_dict.pwd
-rw-r--r-- 1 root root 11360 Jun 4 11:51 cracklib_dict.pwi
-rwxr-xr-x 1 root root 342427 Jun 3 13:46 ld-linux.so.2*
-rwxr-xr-x 1 root root 4061504 Jun 3 13:46 libc.so.6*
lrwxrwxrwx 1 root root 15 Jun 4 12:11 libcrack.so -> libcrack.so.2.7*
lrwxrwxrwx 1 root root 15 Jun 4 12:11 libcrack.so.2 -> libcrack.so.2.7*
-rwxr-xr-x 1 root root 33291 Jun 4 11:39 libcrack.so.2.7*
-rwxr-xr-x 1 root root 60988 Jun 3 13:46 libcrypt.so.1*
-rwxr-xr-x 1 root root 71846 Jun 3 13:46 libdl.so.2*
-rwxr-xr-x 1 root root 27762 Jun 3 13:46 libhistory.so.4.0*
lrwxrwxrwx 1 root root 17 Jun 4 12:12 libncurses.so.4 -> libncurses.so.4.2*
-rwxr-xr-x 1 root root 503903 Jun 3 13:46 libncurses.so.4.2*
lrwxrwxrwx 1 root root 17 Jun 4 12:12 libncurses.so.5 -> libncurses.so.5.0*
-rwxr-xr-x 1 root root 549429 Jun 3 13:46 libncurses.so.5.0*
-rwxr-xr-x 1 root root 369801 Jun 3 13:46 libnsl.so.1*
-rwxr-xr-x 1 root root 142563 Jun 4 11:49 libnss_compat.so.1*
-rwxr-xr-x 1 root root 215569 Jun 4 11:49 libnss_compat.so.2*
-rwxr-xr-x 1 root root 61648 Jun 4 11:34 libnss_dns.so.1*
-rwxr-xr-x 1 root root 63453 Jun 4 11:34 libnss_dns.so.2*
-rwxr-xr-x 1 root root 63782 Jun 4 11:34 libnss_dns6.so.2*
-rwxr-xr-x 1 root root 205715 Jun 3 13:46 libnss_files.so.1*
-rwxr-xr-x 1 root root 235932 Jun 3 13:49 libnss_files.so.2*
-rwxr-xr-x 1 root root 204383 Jun 4 11:33 libnss_nis.so.1*
-rwxr-xr-x 1 root root 254023 Jun 4 11:33 libnss_nis.so.2*
-rwxr-xr-x 1 root root 256465 Jun 4 11:33 libnss_nisplus.so.2*
lrwxrwxrwx 1 root root 14 Jun 4 12:12 libpam.so.0 -> libpam.so.0.72*
-rwxr-xr-x 1 root root 31449 Jun 3 13:46 libpam.so.0.72*
lrwxrwxrwx 1 root root 19 Jun 4 12:12 libpam_misc.so.0 ->
libpam_misc.so.0.72*
-rwxr-xr-x 1 root root 8125 Jun 3 13:46 libpam_misc.so.0.72*
lrwxrwxrwx 1 root root 15 Jun 4 12:12 libpamc.so.0 -> libpamc.so.0.72*
-rwxr-xr-x 1 root root 10499 Jun 3 13:46 libpamc.so.0.72*
-rwxr-xr-x 1 root root 176427 Jun 3 13:46 libreadline.so.4.0*
-rwxr-xr-x 1 root root 44729 Jun 3 13:46 libutil.so.1*
-rwxr-xr-x 1 root root 70254 Jun 3 13:46 libz.a*
lrwxrwxrwx 1 root root 13 Jun 4 12:13 libz.so -> libz.so.1.1.3*
lrwxrwxrwx 1 root root 13 Jun 4 12:13 libz.so.1 -> libz.so.1.1.3*
-rwxr-xr-x 1 root root 63312 Jun 3 13:46 libz.so.1.1.3*
drwxr-xr-x 2 root root 4096 Jun 4 12:00 security/
./lib/security:
total 668
drwxr-xr-x 2 root root 4096 Jun 4 12:00 ./
drwxr-xr-x 3 root root 4096 Jun 4 12:13 ../
-rwxr-xr-x 1 root root 10067 Jun 3 13:46 pam_access.so*
-rwxr-xr-x 1 root root 8300 Jun 3 13:46 pam_chroot.so*
-rwxr-xr-x 1 root root 14397 Jun 3 13:46 pam_cracklib.so*
-rwxr-xr-x 1 root root 5082 Jun 3 13:46 pam_deny.so*
-rwxr-xr-x 1 root root 13153 Jun 3 13:46 pam_env.so*
-rwxr-xr-x 1 root root 13371 Jun 3 13:46 pam_filter.so*

```

Appendix

```
-rwxr-xr-x 1 root root 7957 Jun 3 13:46 pam_ftp.so*
-rwxr-xr-x 1 root root 12771 Jun 3 13:46 pam_group.so*
-rwxr-xr-x 1 root root 10174 Jun 3 13:46 pam_issue.so*
-rwxr-xr-x 1 root root 9774 Jun 3 13:46 pam_lastlog.so*
-rwxr-xr-x 1 root root 13591 Jun 3 13:46 pam_limits.so*
-rwxr-xr-x 1 root root 11268 Jun 3 13:46 pam_listfile.so*
-rwxr-xr-x 1 root root 11182 Jun 3 13:46 pam_mail.so*
-rwxr-xr-x 1 root root 5923 Jun 3 13:46 pam_nologin.so*
-rwxr-xr-x 1 root root 5460 Jun 3 13:46 pam_permit.so*
-rwxr-xr-x 1 root root 18226 Jun 3 13:46 pam_pwcheck.so*
-rwxr-xr-x 1 root root 12590 Jun 3 13:46 pam_rhosts_auth.so*
-rwxr-xr-x 1 root root 5551 Jun 3 13:46 pam_rootok.so*
-rwxr-xr-x 1 root root 7239 Jun 3 13:46 pam_securetty.so*
-rwxr-xr-x 1 root root 6551 Jun 3 13:46 pam_shells.so*
-rwxr-xr-x 1 root root 55925 Jun 4 12:00 pam_smb_auth.so*
-rwxr-xr-x 1 root root 12678 Jun 3 13:46 pam_stress.so*
-rwxr-xr-x 1 root root 11170 Jun 3 13:46 pam_tally.so*
-rwxr-xr-x 1 root root 11124 Jun 3 13:46 pam_time.so*
-rwxr-xr-x 1 root root 45703 Jun 3 13:46 pam_unix.so*
-rwxr-xr-x 1 root root 45703 Jun 3 13:46 pam_unix2.so*
-rwxr-xr-x 1 root root 45386 Jun 3 13:46 pam_unix_acct.so*
-rwxr-xr-x 1 root root 45386 Jun 3 13:46 pam_unix_auth.so*
-rwxr-xr-x 1 root root 45386 Jun 3 13:46 pam_unix_passwd.so*
-rwxr-xr-x 1 root root 45386 Jun 3 13:46 pam_unix_session.so*
-rwxr-xr-x 1 root root 9726 Jun 3 13:46 pam_userdb.so*
-rwxr-xr-x 1 root root 6424 Jun 3 13:46 pam_warn.so*
-rwxr-xr-x 1 root root 7460 Jun 3 13:46 pam_wheel.so*
./sbin:
total 3132
drwxr-xr-x 2 root root 4096 Jun 4 12:35 ./
drwxr-xr-x 9 root root 4096 Jun 5 10:05 ../
-rwxr-xr-x 1 root root 178256 Jun 3 13:46 choptest*
-rwxr-xr-x 1 root root 184032 Jun 3 13:46 cqtest*
-rwxr-xr-x 1 root root 81096 Jun 3 13:46 dialtest*
-rwxr-xr-x 1 root root 1142128 Jun 4 11:28 ldconfig*
-rwxr-xr-x 1 root root 2868 Jun 3 13:46 lockname*
-rwxr-xr-x 1 root root 3340 Jun 3 13:46 ondelay*
-rwxr-xr-x 1 root root 376796 Jun 3 13:46 pagesend*
-rwxr-xr-x 1 root root 13950 Jun 3 13:46 probemodem*
-rwxr-xr-x 1 root root 9234 Jun 3 13:46 recvstats*
-rwxr-xr-x 1 root root 64480 Jun 3 13:46 sftp-server*
-rwxr-xr-x 1 root root 744412 Jun 3 13:46 sshd*
-rwxr-xr-x 1 root root 30750 Jun 4 11:46 su*
-rwxr-xr-x 1 root root 194632 Jun 3 13:46 tagtest*
-rwxr-xr-x 1 root root 69892 Jun 3 13:46 tsitest*
-rwxr-xr-x 1 root root 43792 Jun 3 13:46 typetest*
./tmp:
total 8
drwxr-xr-x 2 root root 4096 Jun 4 12:32 ./
drwxr-xr-x 9 root root 4096 Jun 5 10:05 ../
./usr:
total 8
drwxr-xr-x 2 root root 4096 Jun 4 12:16 ./
drwxr-xr-x 9 root root 4096 Jun 5 10:05 ../
```

```
lrwxrwxrwx 1 root root 7 Jun 4 12:14 bin -> ../bin//
lrwxrwxrwx 1 root root 7 Jun 4 11:33 lib -> ../lib//
lrwxrwxrwx 1 root root 8 Jun 4 12:13 sbin -> ../sbin//
```

Chroot environment for Apache

####

The **chroot** utility is often used to jail a daemon in a restricted tree. You can use it to insulate services from one another, so that security issues in a software package do not jeopardize the whole server. When using the **makejail** script, setting up and updating the chrooted tree is much easier.

FIXME: Apache can also be chrooted using <http://www.modsecurity.org> which is available in `libapache-mod-security` (for Apache 1.x) and `libapache2-mod-security` (for Apache 2.x).

Licensing

This document is copyright 2002 Alexandre Ratti. It has been dual-licensed and released under the GPL version 2 (GNU General Public License) the GNU-FDL 1.2 (GNU Free Documentation Licence) and is included in this manual with his explicit permission.

Installing the server

This procedure was tested on Debian GNU/Linux 3.0 (Woody) with **makejail** 0.0.4-1 (in Debian/testing).

- Log in as **root** and create a new jail directory:

```
$ mkdir -p /var/chroot/apache
```

- Create a new user and a new group. The chrooted Apache server will run as this user/group, which isn't used for anything else on the system. In this example, both user and group are called **chrapach**.

```
$ adduser --home /var/chroot/apache --shell /bin/false \
--no-create-home --system --group chrapach
```

FIXME: is a new user needed? (Apache already runs as the apache user)

- Install Apache as usual on Debian: `apt-get install apache`
- Set up Apache (e.g. define your subdomains, etc.). In the `/etc/apache/httpd.conf` configuration file, set the *Group* and *User* options to `chrapach`. Restart Apache and make sure the server is working correctly. Now, stop the Apache daemon.
- Install **makejail** (available in Debian/testing for now). You should also install **wget** and **lynx** as they will be used by **makejail** to test the chrooted server: `apt-get install makejail wget lynx`
- Copy the sample configuration file for Apache to the `/etc/makejail` directory:

```
# cp /usr/share/doc/makejail/examples/apache.py /etc/makejail/
```

- Edit `/etc/makejail/apache.py`. You need to change the *chroot*, *users* and *groups* options. To run this version of **makejail**, you can also add a **packages** option. See the <http://www.floc.net/makejail/current/doc/>. A sample is shown here:

```

chroot="/var/chroot/apache"
testCommandsInsideJail=["/usr/sbin/apachectl start"]
processNames=["apache"]
testCommandsOutsideJail=["wget -r --spider http://localhost/",
                          "lynx --source https://localhost/"]
preserve=["/var/www",
          "/var/log/apache",
          "/dev/log"]
users=["chrapach"]
groups=["chrapach"]
packages=["apache", "apache-common"]
userFiles=["/etc/password",
           "/etc/shadow"]
groupFiles=["/etc/group",
            "/etc/gshadow"]
forceCopy=["/etc/hosts",
           "/etc/mime.types"]

```

FIXME: some options do not seem to work properly. For instance, `/etc/shadow` and `/etc/gshadow` are not copied, whereas `/etc/password` and `/etc/group` are fully copied instead of being filtered.

- Create the chroot tree: `makejail /etc/makejail/apache.py`
- If `/etc/password` and `/etc/group` were fully copied, type:

```

$ grep chrapach /etc/passwd > /var/chroot/apache/etc/passwd
$ grep chrapach /etc/group > /var/chroot/apache/etc/group

```

to replace them with filtered copies.

- Copy the Web site pages and the logs into the jail. These files are not copied automatically (see the *preserve* option in **makejail**'s configuration file).

```

# cp -Rp /var/www /var/chroot/apache/var
# cp -Rp /var/log/apache/*.log /var/chroot/apache/var/log/apache

```

- Edit the startup script for the system logging daemon so that it also listen to the `/var/chroot/apache/dev/log` socket. In `/etc/default/syslogd`, replace: `SYSLOGD=""` with `SYSLOGD="-a /var/chroot/apache/dev/log"` and restart the daemon (`/etc/init.d/syslogd restart`).
- Edit the Apache startup script (`/etc/init.d/apache`). You might need to make some changes to the default startup script for it to run properly with a chrooted tree. Such as:
 - set a new `CHRDIR` variable at the top of the file;
 - edit the *start*, *stop*, *reload*, etc. sections;
 - add a line to mount and unmount the `/proc` filesystem within the jail.

```
#!/bin/bash
#
# apache          Start the apache HTTP server.
#

CHRDIR=/var/chroot/apache

NAME=apache
PATH=/bin:/usr/bin:/sbin:/usr/sbin
DAEMON=/usr/sbin/apache
SUEXEC=/usr/lib/apache/suexec
PIDFILE=/var/run/$NAME.pid
CONF=/etc/apache/httpd.conf
APACHECTL=/usr/sbin/apachectl

trap "" 1
export LANG=C
export PATH

test -f $DAEMON || exit 0
test -f $APACHECTL || exit 0

# ensure we don't leak environment vars into apachectl
APACHECTL="env -i LANG=${LANG} PATH=${PATH} chroot $CHRDIR $APACHECTL"

if egrep -q -i "^[[:space:]]*ServerType[[:space:]]+inet" $CONF
then
    exit 0
fi

case "$1" in
start)
    echo -n "Starting web server: $NAME"
    mount -t proc proc /var/chroot/apache/proc
    start-stop-daemon --start --pidfile $PIDFILE --exec $DAEMON \
        --chroot $CHRDIR
    ;;

stop)
    echo -n "Stopping web server: $NAME"
    start-stop-daemon --stop --pidfile "$CHRDIR/$PIDFILE" --oknodo
    umount /var/chroot/apache/proc
    ;;

reload)
    echo -n "Reloading $NAME configuration"
    start-stop-daemon --stop --pidfile "$CHRDIR/$PIDFILE" \
        --signal USR1 --startas $DAEMON --chroot $CHRDIR
    ;;

reload-modules)
    echo -n "Reloading $NAME modules"
    start-stop-daemon --stop --pidfile "$CHRDIR/$PIDFILE" --oknodo \
        --retry 30
```



```

start-stop-daemon --start --pidfile $PIDFILE \
  --exec $DAEMON --chroot $CHRDIR
;;

restart)
  $0 reload-modules
  exit $?
;;

force-reload)
  $0 reload-modules
  exit $?
;;

*)
  echo "Usage: /etc/init.d/$NAME {start|stop|reload|reload-modules|force-reload}"
  exit 1
;;
esac

if [ $? == 0 ]; then
  echo .
  exit 0
else
  echo failed
  exit 1
fi

```

FIXME: should the first Apache process be run as another user than root (i.e. add `--chuid chrapach:chrapach`)? Cons: chrapach will need write access to the logs, which is awkward.

- Replace in `/etc/logrotate.d/apache/var/log/apache/*.log` with `/var/chroot/apache/var/log/apache/*.log`
- Start Apache (`/etc/init.d/apache start`) and check what is it reported in the jail log (`/var/chroot/apache/var/log/apache/error.log`). If your setup is more complex, (e.g. if you also use PHP and MySQL), files will probably be missing. If some files are not copied automatically by **makejail**, you can list them in the *forceCopy* (to copy files directly) or *packages* (to copy full packages and their dependencies) option in the `/etc/makejail/apache.py` configuration file.
- Type `ps aux | grep apache` to make sure Apache is running. You should see something like:

```

root 180 0.0 1.1 2936 1436 ? S 04:03 0:00 /usr/sbin/apache
chrapach 189 0.0 1.1 2960 1456 ? S 04:03 0:00 /usr/sbin/apache
chrapach 190 0.0 1.1 2960 1456 ? S 04:03 0:00 /usr/sbin/apache
chrapach 191 0.0 1.1 2960 1456 ? S 04:03 0:00 /usr/sbin/apache
chrapach 192 0.0 1.1 2960 1456 ? S 04:03 0:00 /usr/sbin/apache
chrapach 193 0.0 1.1 2960 1456 ? S 04:03 0:00 /usr/sbin/apache

```

- Make sure the Apache processes are running chrooted by looking in the `/proc` filesystem: `ls -la /proc/process_number/root/.` where `process_number` is one of the PID numbers listed above (2nd column; 189 for instance). The entries for a restricted tree should be listed:

```
drwxr-sr-x 10 root staff 240 Dec 2 16:06 .
drwxrwsr-x 4 root staff 72 Dec 2 08:07 ..
drwxr-xr-x 2 root root 144 Dec 2 16:05 bin
drwxr-xr-x 2 root root 120 Dec 3 04:03 dev
drwxr-xr-x 5 root root 408 Dec 3 04:03 etc
drwxr-xr-x 2 root root 800 Dec 2 16:06 lib
dr-xr-xr-x 43 root root 0 Dec 3 05:03 proc
drwxr-xr-x 2 root root 48 Dec 2 16:06 sbin
drwxr-xr-x 6 root root 144 Dec 2 16:04 usr
drwxr-xr-x 7 root root 168 Dec 2 16:06 var
```

To automate this test, you can type:`ls -la /proc/`cat /var/chroot/apache/var/run/apache.pid`/root/.`

FIXME: Add other tests that can be run to make sure the jail is closed?

The reason I like this is because setting up the jail is not very difficult and the server can be updated in just two lines:

```
apt-get update && apt-get install apache
makejail /etc/makejail/apache.py
```

See also

If you are looking for more information you can consider these sources of information in which the information presented is based: <http://www.floc.net/makejail/>, this program was written by Alain Tesio